

Project \_\_\_\_\_  
Catalogue n° \_\_\_\_\_

Type \_\_\_\_\_  
Date \_\_\_\_\_

AimLite

# EBPH-5L

## PLASTIC BATTERY UNIT

The commercial EBPH-5L features a plastic battery unit designed to provide an economical and versatile solution to emergency lighting needs within a small and compact design. The EBPH-5L series is configured with two 5W LED heads and can run for 120 minutes duration as a standalone unit.



### FEATURES & SPECIFICATIONS

#### CIRCUITRY



- 120/277 VAC Input
- Solid state variable rate charger
- 120 minutes emergency power duration
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limiter charger
- Short circuit protection
- 9.6V maintenance free, lithium iron phosphate battery

#### MECHANICAL

- Thermoplastic construction
- 2x 5W LED
- Lamp heads provide up to 100ft
- Wall and ceiling mount
- White colour standard

#### APPROVALS

- CSA C22.2 #141-15

OVERVIEW			
LIGHT SOURCE	LED	INPUT VOLTAGE [V AC]	120/277/347
EMERGENCY DURATION	120 MINUTES		
<div> LED</div> <div></div>			


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.

# EBPH-5L

## TECHNICAL SPECIFICATION TABLE

PART NUMBER	NO. OF HEADS	DC VOLTS [V DC]	WATTS	LAMP [W]	LIGHT SOURCE	INPUT VOLTS [V AC]	COLOUR
EBPH-5L	2	10	27	5	LED	120/277/347	WHITE

## DIMENSIONS

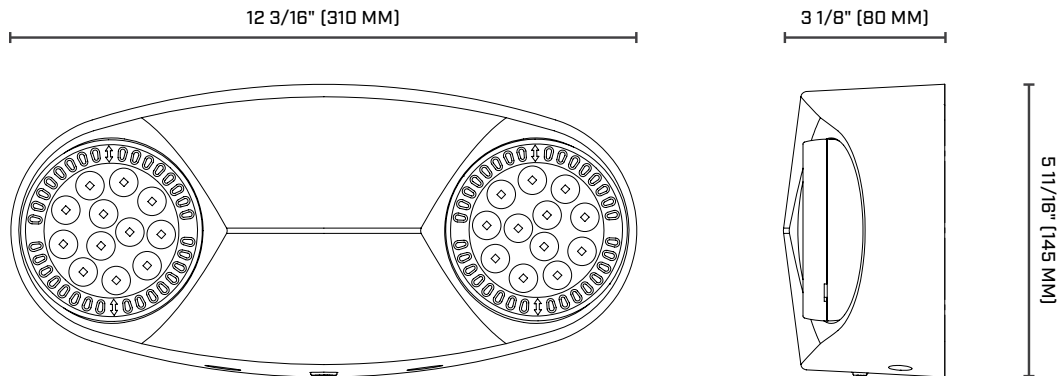

## SPACING GUIDE

MOUNTING HEIGHT	SPACING CENTER TO CENTER (FT)
9 FT	115
10 FT	112
12 FT	108

## LUMEN TABLE

DESCRIPTION	WATT	LUMEN	LUMEN PER WATT
EBPH-5L	10	581	58.1