

VP2-L GEN 2 2' LED VAPOR TIGHT

WITH MADE TO ORDER OPTIONS OPTIONAL EMERGENCY REMOTE

A luminaire ideal for a variety of indoor/outdoor industrial and commercial applications. Intended for environments where moisture and/or dust may be present. Ideal for garages and stairwell.

APPLICATIONS¹

- Industrial facilities
- Exterior retail areas
- Stairwells
- Transportation
- Parking garages
- Pedestrian tunnels

FEATURES & SPECIFICATIONS

CONSTRUCTION

Housing

- Lightweight, flexible, durable and sealed polycarbonate construction
- Integral gasket forms uniform, long-life seal around the entire enclosure
- Reinforced polycarbonate latches
- Sealed strain relief/cable gland kit included
- Power connection is easily accomplished through pre-drilled hole on one end of the housing. Wet location gland is included to seal the fixture from moisture

Lens

The UV stabilized polycarbonate lens with LED diffusing pigment is impervious to rust or rot and is unaffected by extreme temperatures.

SPECIFICATIONS

- Easy to clean and service
- LED technology for long term energy savings

Driver

- 120 V, 120 V-277 V and 347 V
- 0-10V dimming driver (down to 1%). Dimming cables sold separately, see ordering guide
- 2.5 kV surge protection (standard). See options table for additional surge protection

Operating Temperature

-40°C to +40°C [-40°F to 104°F]
 DL: 0°C to +25°C [32° to 77°F]
 BRIDGE: -40°C to +40°C [-40°F to 104°F]

Mounting

Stainless steel surface mounting hardware for wall/ceiling included with the luminaire. Set of 2 V-hooks also included for suspended mounting. Consult ordering guide for more options

OPTIONAL EMERGENCY LIGHTING

BRIDGE Normally ON LED Vapor Tight Luminaire

- Consuming 11W, 12-24 V DC
- 200 mA constant current
- Delivers 1193 - 1367 lumens in emergency mode
- Ease of maintenance when used with AimLite emergency lighting battery units complete with auto test function
- Complements AimLite's Normally ON LED Vapor Tight family
- Patent pending

Please view the **BRIDGE** specification section for more details on this technology










COMPLIANCES

- Suitable for damp and wet locations
- IP65
- 1500 PSI: High pressure hose down test [1.3 gallon per minute for 3 minutes at 1.5-2.0' from the unit] to maintain the integrity of the fixture. No water ingress is allowed
- Meets NSF
- Meets NEMA 4X
- Meets requirements of ICES-005
- cETL
- DLC Premium, DLC Standard
- BC Hydro

EMERGENCY LIGHTING COMPLIANCES

- CSA certified as a C22.2 C141-15 emergency lighting luminaire
- Meets ICES-005 requirements

| OVERVIEW | | | |
|-------------------|---------------|-----------------------|----------------------------|
| LIGHT SOURCE | LED | COLOR TEMPERATURE (K) | 3 000, 3 500, 4 000, 5 000 |
| WATTS (W) | 17 - 30 | CRI | 80+, 90+ |
| LUMEN OUTPUT (LM) | 2 143 - 4 210 | WEIGHT (LBS) | 4.35 |
| EFFICACY (LM/W) | 126 - 141 | | |

¹ Not recommended for car wash applications.

² 5 year warranty for the BRIDGE module

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

VP2-L GEN 2

ORDERING GUIDE

| VP2 | L | | | | | |
|--------|-----------|---|------------------------------------|-----------------------------------|--|---|
| SERIES | LAMP TYPE | LUMEN PACKAGE [LM] | CRI | VOLTS [VAC] | COLOR TEMP. [K] | OPTIONS |
| VP2 | L - LED | A1B - } REFER TO A2B - } LUMEN CHART TABLE FOR DETAILS | 80 - 80+ 90 ¹¹ - 90+ | 4 - 120 8 - 347 2 - 120-277 | 30K - 3 000 35K - 3 500 40K - 4 000 50K - 5 000 | L6 - 6' POWER CABLE LENGTH L10 - 10' POWER CABLE LENGTH AC ¹ - AVIATION CABLE SS - STAINLESS STEEL LATCHES (SET OF 10PCS) OS ² - OCCUPANCY SENSOR EL ^{3,12} - BRIDGE NORMALLY ON EMERGENCY REMOTE DL ^{4,13} - AC AND EMERGENCY BACKUP (FROM 0°C - 25°C) 120 V, 120-277 V DIM1 ⁵ - 0-10 V INTERNAL DIMMING WIRES READY TO CONNECT DIM2 ⁶ - LINE VOLTAGE DIMMING DRIVER 120 V KV - 10KV SURGE PROTECTOR TP ⁷ - VANDAL RESISTANT KIT (INCLUDES 6PCS TAMPER PROOF SCREWS) RMB-05 ⁸ - RIGID MONO POINT ON BRACKET WITH 3/4" CENTER HOLE FOR 1/2 NPT CONDUIT RMB-075 ⁸ - RIGID MONO POINT ON BRACKET WITH 1" CENTER HOLE FOR 3/4 NPT CONDUIT RMP-05 ^{8,13} - RIGID MONO POINT ON THE LUMINAIRE WITH 3/4" CENTER HOLE FOR 1/2 NPT CONDUIT RMP-075 ^{8,13} - RIGID MONO POINT ON THE LUMINAIRE WITH 1" CENTER HOLE FOR 3/4 NPT CONDUIT PVPM-05 ⁸ - RIGID MONO POINT ON PIVOT MOUNT BRACKET WITH 3/4" CENTER HOLE AND 1/2 NPT PVPM-075 ⁸ - RIGID MONO POINT ON PIVOT MOUNT BRACKET WITH 1" CENTER HOLE AND 3/4 NPT PVM ⁹ - SURFACE MOUNT BRACKETS WITH PIVOT (SET OF 2) EH ⁹ - ADDITIONAL 7/8" END HOLE WITH WET LOCATION GLAND CH ¹⁰ - 7/8" CENTER HOLE WITH WET LOCATION GLAND |

¹ Aviation cable length based on selected power cable length.

² To see available options, please consult the occupancy sensors section.

³ Contact factory for availability.

⁴ DL option is not compatible with OS (internal).

⁵ DIM1 option must select L6 or L10. DL option is not compatible with DIM1.

⁶ DIM2 option is not compatible with OS (internal).

⁷ 1 tamper proof bit (HAR06-TPBIT-UDR) included per order. Please consult the accessory table to order additional quantities.

⁸ See Mounting Options table.

⁹ Luminaire includes 1 end hole with wet location gland for main power connection. The /EH option offers a second end hole with wet location gland on the opposite side of the luminaire.

¹⁰ Use plug (included with the luminaire) to block End Hole, if not in use.

¹¹ 90 CRI option may decrease lumen output from 15% to 19% depending on CCT.

¹² The BRIDGE Emergency Power conversion module is compatible with all the following all configurations: LA1B, LA2B.

Not compatible with the following options: DL, EH, OS (external), RMP-05, RMP-075. When in Emergency Mode, luminaire only consumes 11W.

¹³ When selecting DL, RMP-05 and RMP-075 options, the fixture maintains wet location status, however IP rating is no longer applicable.

For Emergency Lighting spacing, please see p.5.

TECHNICAL SPECIFICATION TABLE

| LUMEN PACKAGE | WATTS [W] | VOLTS [V] | 3 000 K | | 3 500 K | | 4 000 K | | 5 000 K | | CRI | LIFE L70 [HRS] | TESTED HOURS LM-80 [HRS] | POWER FACTOR | THD [%] |
|---------------|-----------|-----------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|-----|----------------|--------------------------|--------------|---------|
| | | | LUMEN OUTPUT [LM] | EFFICACY [LM/W] | LUMEN OUTPUT [LM] | EFFICACY [LM/W] | LUMEN OUTPUT [LM] | EFFICACY [LM/W] | LUMEN OUTPUT [LM] | EFFICACY [LM/W] | | | | | |
| A1B | 17 | 120-277 | 2 143 | 126 | 2 214 | 130 | 2 265 | 133 | 2 302 | 135 | 80+ | 190 400 | 9 000 | 20.2 | 0.894 |
| A2B | 29 | 347 | 3 920 | 131 | 4 050 | 135 | 4 143 | 138 | 4 210 | 141 | | | | 13.7 | 0.95 |

BRIDGE TECHNICAL SPECIFICATION TABLE

| LUMEN PACKAGE | LUMINAIRE WATTS [W] | BRIDGE WATTS [W] | 3 000 K | 3 500 K | 4 000 K | 5 000 K |
|---------------|---------------------|------------------|-------------------|-------------------|-------------------|-------------------|
| | | | LUMEN OUTPUT [LM] | LUMEN OUTPUT [LM] | LUMEN OUTPUT [LM] | LUMEN OUTPUT [LM] |
| LA1B | 18 | 11 | 1 273 | 1 315 | 1 345 | 1 367 |
| LA2B | 30 | | 1 193 | 1 232 | 1 261 | 1 281 |

ACCESSORIES (ORDER SEPARATELY)

| PART NO | DESCRIPTION |
|-------------------------------|---------------------------------------|
| HAR06-TPBIT-UDR | TAMPER PROOF 2" STEEL POWER BIT |
| CAS060-MC-JP ¹ | REPLACEMENT POLYCARBONATE LATCH (1PC) |
| CAS060-LATCH-SS2 ¹ | STAINLESS STEEL LATCH (1PC) |

¹ 10 latches are required per fixture

OCCUPANCY SENSORS

ON-OFF SENSORS

Detection - On at [Detection Area] % during [Hold Time] min. Off

| PART NO | POSITION | VOLTS [VAC] | TECHNOLOGY | HEIGHT [FT] | DETECTION AREA [%] | HOLD TIME [MIN.] | DAYLIGHT MIN LEVEL [LUX] | REMOTE* | LOCATION** |
|-------------|----------|-------------|----------------|-------------|--------------------|------------------|--------------------------|--------------|-----------------------------|
| OSE-PO-0301 | EXTERNAL | 120-347 | PIR | 20-40 | 100 | 20 | N/A | N/A | DRY, -10°C TO 40°C |
| OSE-PO-0501 | EXTERNAL | 120-347 | PIR | 15-40 | 100 | 15 | 3000 | OSI-FSIR-100 | DRY, 0°C TO 40°C |
| OSE-PO-0502 | EXTERNAL | 120-347 | PIR | 15-40 | 100 | 15 | 3000 | N/A | DRY, 0°C TO 40°C |
| OSE-PO-0701 | EXTERNAL | 120-277 | PIR | 20 | 100 | 15 | N/A | N/A | WET, -40°C TO 40°C |
| OSE-PO-0801 | EXTERNAL | 347 | PIR | 20 | 100 | 15 | N/A | N/A | WET, -40°C TO 40°C |
| OSI-FO-0301 | INTERNAL | 120-277 | HIGH FREQUENCY | 32 MAX | 100% | 20 | DISABLE | N/A | DRY AND WET, -25°C TO +40°C |
| OSI-FO-0601 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100% | 30 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO +40°C |
| OSI-FO-0602 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100% | 15 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO +40°C |
| OSI-FO-0603 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100% | 15 | 100 | OSI-RC-MH02 | DRY AND WET, -35°C TO +40°C |

BI-LEVEL SENSORS

Detection - On at [Detection Area] % during [Hold Time] min., then [Stand-by Dim level] %

| PART NO | POSITION | VOLTS [VAC] | TECHNOLOGY | HEIGHT [FT] | DETECTION AREA [%] | HOLD TIME [MIN.] | STAND-BY DIM LEVEL [%] | DAYLIGHT MIN LEVEL [LUX] | REMOTE* | LOCATION** |
|-------------|----------|-------------|----------------|-------------|--------------------|------------------|------------------------|--------------------------|--------------|----------------------------|
| OSE-PB-0202 | EXTERNAL | 120-347 | PIR | 20 | 100 | 30 | 40 | DISABLE | OSI-FSIR-100 | WET, -40°C TO 40°C |
| OSI-FB-0301 | INTERNAL | 120-277 | HIGH FREQUENCY | 32 MAX | 100 | 20 | 30 | DISABLE | N/A | DRY AND WET, -25°C TO 40°C |
| OSI-FB-0302 | INTERNAL | 120-277 | HIGH FREQUENCY | 32 MAX | 100 | 20 | 10 | DISABLE | N/A | DRY AND WET, -25°C TO 40°C |
| OSI-FB-0303 | INTERNAL | 120-277 | HIGH FREQUENCY | 32 MAX | 100 | 20 | 50 | DISABLE | N/A | DRY AND WET, -25°C TO 40°C |
| OSE-FB-0402 | EXTERNAL | 120-347 | HIGH FREQUENCY | 50 MAX | 100 | 20 | 30 | 50 LUX | OSI-RC-MH02 | WET, -35°C TO 40°C |
| OSI-FB-0603 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100 | 15 | 40 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO 40°C |
| OSI-FB-0604 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100 | 30 | 40 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO 40°C |
| OSI-FB-0605 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100 | 15 | 30 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO 40°C |
| OSI-FB-0606 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100 | 15 | 10 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO 40°C |

* To be ordered separately.

** Min and max ambient temperature of the fixture with the specific sensor. Please verify fixture temperature on the first page for compatibility with sensor.

TRI-LEVEL SENSORS

Detection - On at [Detection Area] % during [Hold Time] min., then [Stand-by Dim level] % during [Stand-by period] min. Off

| PART NO | POSITION | VOLTS [VAC] | TECHNOLOGY | HEIGHT [FT] | DETECTION AREA [%] | HOLD TIME [MIN.] | STAND-BY DIM LEVEL [%] | STAND-BY PERIOD [MIN] | DAYLIGHT MIN LEVEL [LUX] | REMOTE* | LOCATION** |
|-------------|----------|-------------|----------------|-------------|--------------------|------------------|------------------------|-----------------------|--------------------------|-------------|----------------------------|
| OSI-FT-0301 | INTERNAL | 120-277 | HIGH FREQUENCY | 32 MAX | 100 | 20 | 30 | 10 | DISABLE | N/A | DRY AND WET, -25°C TO 40°C |
| OSE-FT-0402 | EXTERNAL | 120-347 | HIGH FREQUENCY | 50 MAX | 100 | 30 | 30 | 10 | 50 | OSI-RC-MH02 | WET, -35°C TO 40°C |
| OSI-FT-0601 | INTERNAL | 120-347 | HIGH FREQUENCY | 25 MAX | 100 | 30 | 30 | 10 | DISABLE | OSI-RC-MH02 | DRY AND WET, -35°C TO 40°C |


* To be ordered separately.

** Min and max ambient temperature of the fixture with the specific sensor. Please verify fixture temperature on the first page for compatibility with sensor.

For more settings visit
aimlite.com/documentation/technical-information/

VP2-L GEN 2

DIMENSIONS

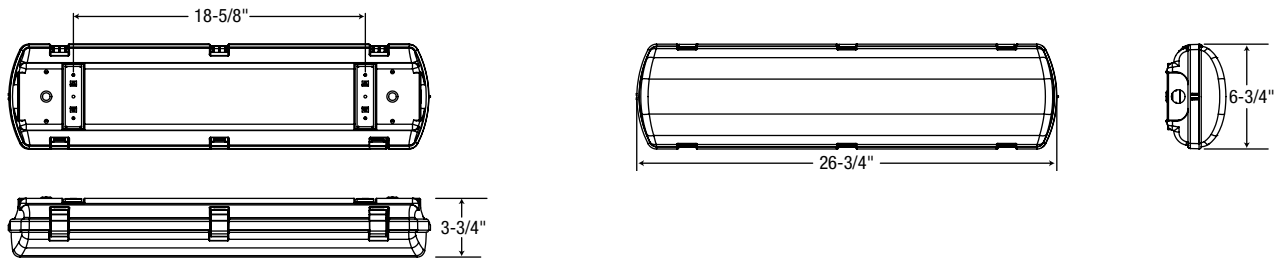

MOUNTING TYPE

| | | |
|--|---|--|
| SUSPENDED | <ul style="list-style-type: none"> SET OF 2 V-HOOKS FOR SUSPENDED MOUNTING, INCLUDED WITH THE LUMINAIRE AVIATION CABLE PURCHASED SEPARATELY, SEE ORDERING GUIDE | |
| SURFACE | <ul style="list-style-type: none"> STAINLESS STEEL SURFACE MOUNTING HARDWARE FOR CEILING/WALL, INCLUDED WITH THE LUMINAIRE | |
| RMB-05 RIGID MONO POINT ON BRACKET WITH 3/4" CENTER HOLE FOR 1/2 NPT CONDUIT | <ul style="list-style-type: none"> TO BE USED IN CONJUNCTION WITH THE SURFACE MOUNTING HARDWARE, INCLUDED WITH THE LUMINAIRE FOR OTHER CENTER HOLE DIMENSIONS, SELECT CH OPTION IN THE ORDERING GUIDE CONDUIT NOT PROVIDED | |
| RMB-075 RIGID MONO POINT ON BRACKET WITH 1" CENTER HOLE FOR 3/4 NPT CONDUIT | | |
| RMP-05 RIGID MONO POINT ON THE LUMINAIRE WITH 3/4" CENTER HOLE FOR 1/2 NPT CONDUIT | <ul style="list-style-type: none"> RIGID MONO POINT DIRECTLY ON THE LUMINAIRE WITH WATERPROOF HUB CONDUIT NOT PROVIDED | |
| RMP-075 RIGID MONO POINT ON THE LUMINAIRE WITH 1" CENTER HOLE FOR 3/4 NPT CONDUIT | | |
| PVPM-05 RIGID MONO POINT ON PIVOT MOUNT BRACKET WITH 3/4" CENTER HOLE AND 1/2 NPT | <ul style="list-style-type: none"> TO BE USED IN CONJUNCTION WITH THE SURFACE MOUNTING HARDWARE, INCLUDED WITH THE LUMINAIRE FOR 7/8" CENTER HOLE, CONSULT CH OPTION ON THE ORDERING GUIDE CONDUIT NOT PROVIDED | |
| PVPM-075 RIGID MONO POINT ON PIVOT MOUNT BRACKET WITH 1" CENTER HOLE AND 3/4 NPT | | |
| PVM SURFACE MOUNT BRACKETS WITH PIVOT [SET OF 2] | <ul style="list-style-type: none"> TO BE USED IN CONJUNCTION WITH THE SURFACE MOUNTING HARDWARE, INCLUDED WITH THE LUMINAIRE FOR CEILING/WALL SURFACE MOUNTING | |

Note: The fixtures used in diagrams above represents the VP4 series. The diagrams are used to showcase mounting options only.

VP2-L GEN 2

BRIDGE


NORMALLY ON EMERGENCY REMOTE LUMINAIRE

This luminaire can be used with an emergency backup powered by either a 12 V or 24 V DC AimLite battery unit, complete with or without auto test.

NORMAL MODE



EMERGENCY MODE

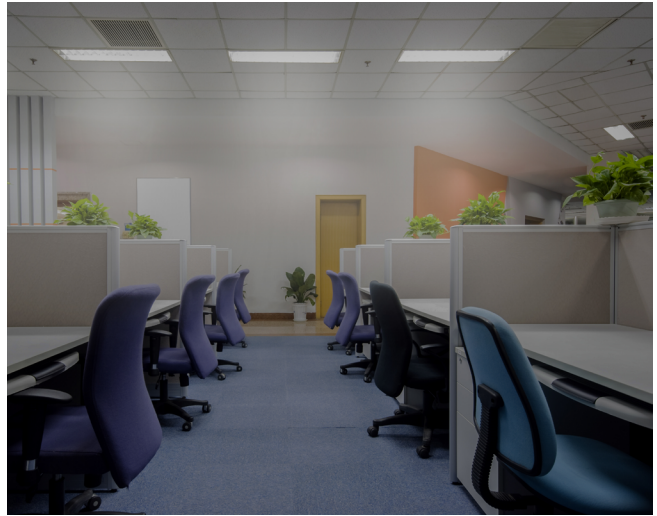

TYPICAL SPECIFICATION

Supply and install AimLite BRIDGE ____ft, LED vapor tight, mModel number: _____ remote normally ON emergency luminaire, CSA C22.2 141-15 certified and meet the requirements prescribed by ICES-005. Normally ON when AC is present and when connected to an AimLite battery unit complete with or without auto test, the luminaire shall act as an emergency lighting remote and consume 11 W of DC power in ____ V producing 1 462 - 1 573 lumens in emergency mode.

The remote normally ON emergency luminaire shall be powered by an AimLite emergency lighting battery unit as described herein and shown on the drawings. The AimLite auto diagnostic micro-controller board shall supply the rated load for a minimum of a 1/2 hour to 87.5% of the rated battery voltage. The unit shall be rated 120 V, 277 V or 347 V, 60 Hz and be CSA listed. The unit shall have an output of: ____V and ____W.

The charge voltage factory set to $\pm 1\%$ tolerance. High Efficacy, rapid recovery, precision control charging system shall be employed to promote long battery life and reduce the potential for grid corrosion. The charger shall provide a continuous high charge to recharge the battery, when the battery is at full capacity, the charger will shut-off. Periodically the charger shall provide a pulse of energy to keep the battery topped off. The pulse charger shall be precisely regulated and shall charge the battery in relation to its temperature, state of charge and input voltage fluctuations. The charger shall be current limited, temperature compensated, short-circuit proof and reverse polarity protected. The unit shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit, which will activate the emergency lights when utility power dips below 75% of nominal voltage. A low voltage battery protection circuit shall be provided and will disconnect the load when the battery reaches the end of discharge.

The automated testing performed by the AimLite auto test system has been designed to comply with all of the requirements of the National Fire Code. Every month, a 5 minute discharge and diagnostic test checks the operational status of the unit. Every 12 months, this test is extended to the full 30 minute, code required duration. This ensures that the battery charger is recharging the battery in accordance with code requirements.


The unit shall be AimLite model: EBST _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.





BRIDGE
NORMALLY ON EMERGENCY REMOTE LUMINAIRE

BRIDGE WIRING DIAGRAM

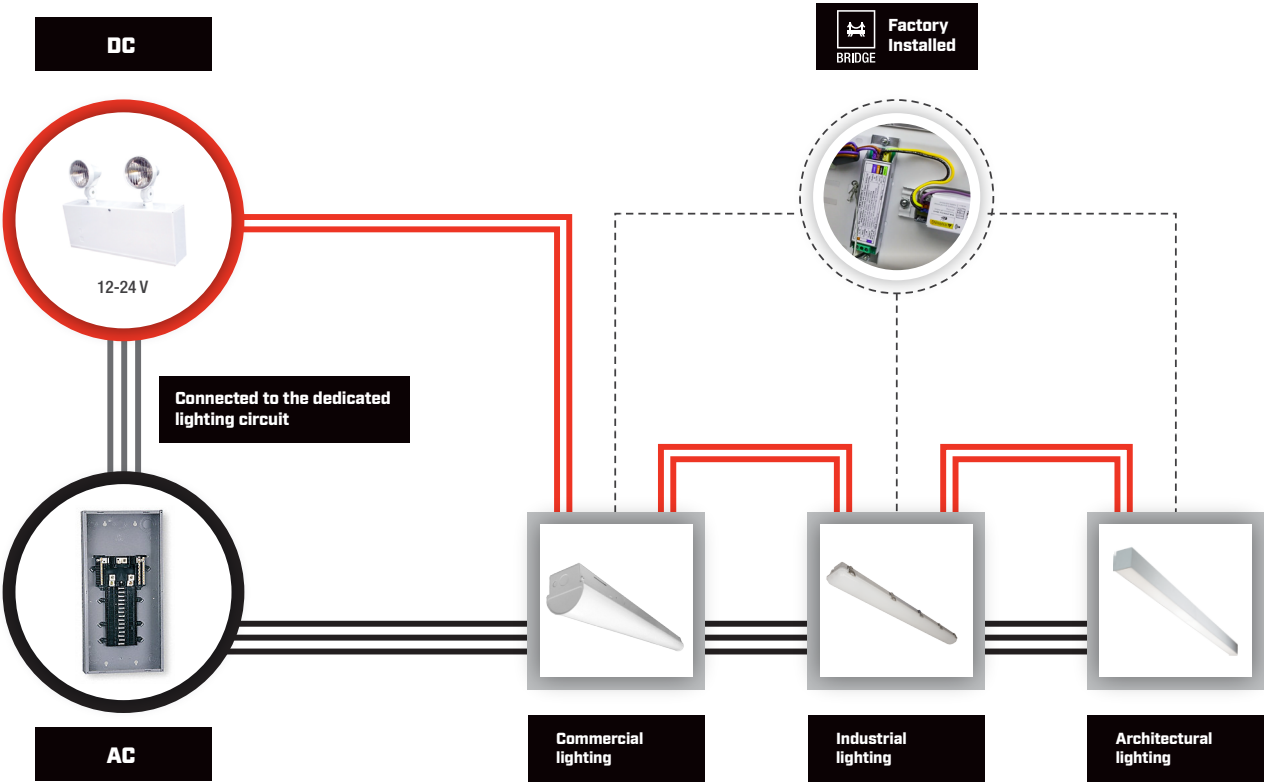 BRIDGE
REMOTE NORMALLY ON
EMERGENCY LIGHTING
LUMINAIRE



LEGEND

 AC wires  Connected to the dedicated lighting circuit  DC wires  BRIDGE Factory Installed


| Emergency mode | Spacing |
|----------------|---|
| VP2-L GEN 2 | Average spacing for 1 out of every 4 luminaires, normally ON in the path of egress, when at 8, 10, or 12 foot mounting heights. |

VP2-L GEN 2

PHOTOMETRIC DATA¹

VP2-LA1B-80-(2/4/8)/40K 2 264 LM

POLAR CANDELA DISTRIBUTION

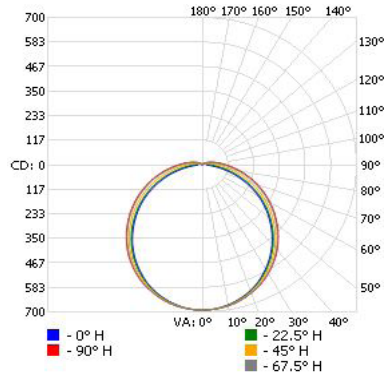

ZONAL LUMEN SUMMARY

| ZONE | LUMENS | % FIXTURE |
|--------|---------|-----------|
| 0-30 | 537.3 | 23.7 |
| 0-40 | 882.0 | 39 |
| 0-60 | 1 577.3 | 69.7 |
| 60-90 | 564.6 | 24.9 |
| 70-100 | 348.9 | 15.4 |
| 90-120 | 105.7 | 4.7 |
| 0-90 | 2 141.8 | 94.6 |
| 90-180 | 122.3 | 5.4 |
| 0-180 | 2 264.1 | 100 |

ILLUMINANCE AT A DISTANCE

| CENTER BEAM FC | | BEAM WIDTH | |
|--|------|------------|-------|
| 1.7' | 239 | 4.9' | 6.1' |
| 3.3' | 63.5 | 9.4' | 11.8' |
| 5.0' | 27.6 | 14.3' | 17.9' |
| 6.7' | 15.4 | 19.1' | 24.0' |
| 8.3' | 10.0 | 23.7' | 29.7' |
| 10.0' | 6.91 | 28.6' | 35.8' |
| ■ Vert. Spread: 110.0° ■ Hor. Spread: 121.7° | | | |

¹ Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.