

Project : _____ Type : _____
 Drawn by : _____ Catalogue # : _____ Date : _____

Individual Spec Sheet

INDOOR/OUTDOOR LOW VOLTAGE FIXTURE CONTROLLER

FIELD INSTALLABLE*

Integrated Bluetooth® Mesh Technology

ORDERING INFORMATION

Order Code: 70000
Model Number: CTRL-KBC1-002
UPC: 069549031562
DLC ID: N-X3RCX5

This low-voltage fixture controller can be used on indoor and outdoor environments. With a 328 ft transmission range and a built-in IP66-rated housing, it ensures reliable, long-distance communication and durability in harsh environments, seamlessly operating within the Genio Smart system luminaires that have a compatible Genio receptacle. When grouped with indoor smart sensors with daylight harvesting (69651), the controller enables unified behavior when motion is triggered, ensuring all devices in the group respond in the the same manner. When used outdoors, to enable automatic operation, assign a schedule to the controller using the Genio app.

Features

- Wireless connectivity: Links to other Genio devices
- Antenna: Enhanced long-range capability
- Suitable for indoor and outdoor wet locations
- Magnetic reset function: factory settings restored by 3-second magnet proximity

TECHNICAL SPECS

Input Voltage: 12 V DC
Input Current: 41 mA Max
Input Power: 0.5 W
Output Current: 10 mA Max
Output Power: 0.1 W
Dimming: Class 2, 0-10 V DC 10 mA Max
Sinking Current: 10 mA Max
Color: Black
Operating Temperature: -30 °C to 65 °C (-22 °F to 149 °F)
Storage temperature: -30 °C to 85 °C (-22 °F to 185 °F)
Housing Material: UL 94-5 VA
Bluetooth® Transmit: 328 ft Max
Radio Frequency: 2.4 GHz ± 75 MHz
IP Rating: IP66

COMPATIBLE ACCESSORY (order separately)

Order code	Model number	Description
70001	CTRL-KBO-003	Outdoor Arm Extension Adapter Black



quick
ship



wet
location



outdoor



indoor



* The fixture needs to have an audio jack receptacle to be compatible.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.


Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE LUMINAIRES

Series	Order code	Model number
FLL	69796	FLLS-PS150W-Q3CBR
	69797	FLLM-PS300W-Q3C3R
	69798	FLLL-PS450W-Q3CBR
	69799	FLLS-PS150W-Q3CBK
	69800	FLLM-PS300W-Q3CBK
	69801	FLLL-PS450W-Q3CBK
	69802	FLLS-PS150W-Q22KBR
	69803	FLLM-PS300W-Q22KBR
WPS GEN. 5	69909	WPS-PS40B-Q-3C-BR
	69910	WPS-PS100B-Q-3C-BR
	69911	WPS-NS120B-Q-3C-BR
	69912	WPS-PS40B-Q-3C-BK
	69913	WPS-PS100B-Q-3C-BK
	69914	WPS-NS120B-Q-3C-BK
L1RVH	69428	L1RVH-PS150-Q/3C-B/CHOICE
	69429	L1RVH-PS240-Q/3C-B/CHOICE
	69746	L1RVH-PS180-Q/3C-B/CHOICE

DIMENSIONS

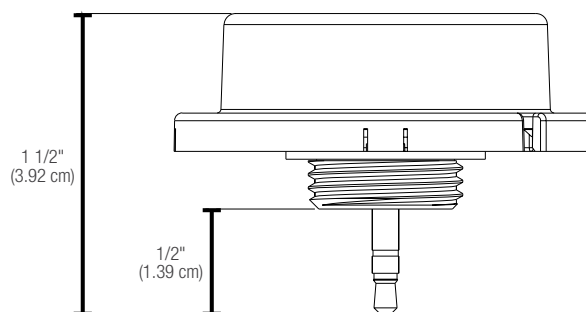

PLUG & PLAY

Plug & Play controller making the fixtures Smart!
70000 is compatible with our FLL, WPS GEN. 5* and L1RVH Series.
Not compatible with 70002 and 70276.

FLL SERIES



Smart ready Flood / Area light

WPS GEN. 5 SERIES



Wall pack - smart compatible option

L1RVH SERIES



Smart ready high bay

*Customizable with the addition of an auxiliary receptacle for smart accessories

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

GENIO CONTROL SYSTEM FEATURES

Genio is Stanpro's smart brand of lighting and emergency lighting. Integrating the latest in Bluetooth® Mesh technology, Genio products allow for customizable features that can be adjusted at your fingertips using a smartphone or other compatible devices. This system is easy to use, versatile and futureproof! Please see below for some of the key features¹ of the Genio control system:



LIGHTS

Instantly control the color temperature, wattage, lumen output and dimming.



GROUPS

Easily group luminaires together and control them as a single unit.



SCENES

Customize your lighting through scenes and create different atmospheres for occasions and activities.




SCHEDULES

Set schedules to specify dates, times and recurrence patterns for changing the settings of your lighting.



SENSOR

Adjust the integrated PIR motion sensor and daylight harvesting settings.

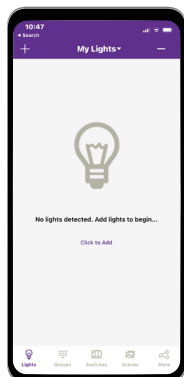

Lights

- Add
- Name or Rename
- Dimming and Color Tuning
- Delete
- Sensor Settings




Groups

- Create
- Rename
- Delete
- Add or Remove Lights
- Adjust Group Linkage Level
- Turn On/Off
- Adjust Group Dimming
- Activate Auto Mode



Scenes

- Create
- Edit
- Delete

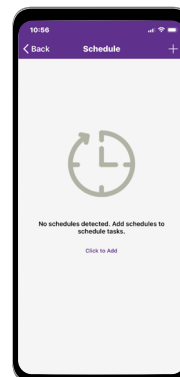

Schedules

- Creating
- Associate a Schedule To Lights, Groups, or Scenes
- Set a Repeating
- Set Fade Time
- Delete
- Enable Or Disable



Download on the
App Store



GET IT ON
Google Play



Download our App
Instruction Guide

¹ Please note that the features mentioned are part of a broader range of characteristics relating to the Genio Ecosystem and may not be applicable to this specific product. Customers are advised to review the product specifications carefully to understand their capabilities.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Ascot Capital Group is under license. Other trademarks and trade names are those of their respective owners.