

AimLite MLF-L ÉCLAIRAGE DE TYPE PETIT PROJECTEUR DEL

3 TCC ET 2 PUISSANCES RÉGLABLES INCLUANT
UNE CELLULE PHOTO ÉLECTRIQUE¹

/// CARACTÉRISTIQUES

- Sélection de puissance (15/25 W, 35/60 W)
- 3 TCC Réglables (3 000/4 000/5 000 K)
programmé par défaut à 4 000 K
- Cellule photoélectrique Marche/Arrêt intégrée
- Types de montages:
Étrier de montage
Tête de branchement réglable de 1/2 po



TCC
RÉGLABLE



W
PUISSANCE
RÉGLABLE



ENVOI
RAPIDE



DEL



À GRADATION



ENDROITS
MOUILLÉS



65
CERTIFICATION
IP



NMB
005



¹ LA CELLULE PHOTOÉLECTRIQUE EST DISPONIBLE SUR CERTAINES CONFIGURATIONS. VEUILLEZ CONSULTER LE TABLEAU DE SPÉCIFICATION POUR PLUS DE DÉTAILS.

AimLite

MLF-L

T 514 227-1288

TF 1866 348-2374


aimlite.com

Guide de commande

PART NO.	DLC UNIQUE ID	WATTS [W]	VOLTS [VAC]	COLOR TEMP. [K]	LUMEN OUTPUT [LM]	EFFICIENCY [LM/W]	CRI	LIFE L70 [HRS]	TESTED HOURS LM-80 [HRS]	CALC. TM21 [HRS]	NEMA type	B.U.G.	EPA [ft2]	LED Current	PHOTOCELL [YES/NO]	PF	THD [%]	TRADITIONAL EQUIVALENT [W]	MASTER CASE QTY	
CCT AND POWER SELECTABLE WITH INTEGRATED PHOTOCELL ⁵																				
MLF-PS25A-2-3CBRYK	S-YFG00N	15/25	120-277	3 000/4 000/5 000	2 100/3 500	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.18	0.23	NO	≥0.90	≤20	70-100	100-150	10
MLF-PS25A-2-3CBRKN	S-YFG00N	15/25	120-277	3 000/4 000/5 000	2 100/3 500	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.18	0.23	NO	≥0.90	≤20	70-100	100-150	10
MLF-PS60A-23CBRYKP	S-MLRPAB	35/60	120-277	3 000/4 000/5 000	4 900/8 400	125-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.42	0.6	YES	≥0.90	≤20	175-400	150-250	10
MLF-PS60A-23CBRKNP	S-MLRPAB	35/60	120-277	3 000/4 000/5 000	4 900/8 400	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.42	0.6	YES	≥0.90	≤20	175-400	150-250	10



Caractéristiques physiques

- Lentille en verre trempé claire

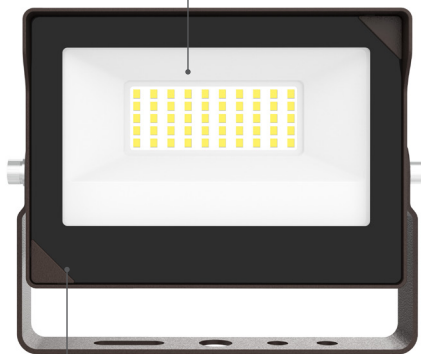

- Finition bronze

- Dissipateurs thermique en aluminium

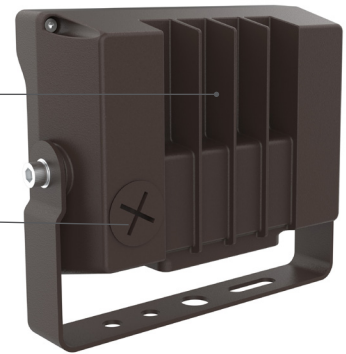

- TCC Réglable
3 000/4 000/ 5 000K

- Puissance réglable
15/25W
35/60W

Types de montage disponibles

Étrier de montage



Tête de branchement réglable

