



AimLite

AUSO QUICK SHIP AUS-L GEN. 2

SUSPENDED
LINEAR ARCHITECTURAL LUMINAIRE




FEATURES

- **Lighting flexibility**
Integrated color temperature selection
Direct and Direct/Indirect lighting versions available.
- **Versatile**
Offered in 2', 4' and 8' lengths with a choice of black or white finishing colors.
- **Seamless mounting**
Customizable projects either in a continuous row system or with corner connectors, for unique design patterns such as L, T, X, Y and 120-degree configurations.




Linear Architectural Fixture

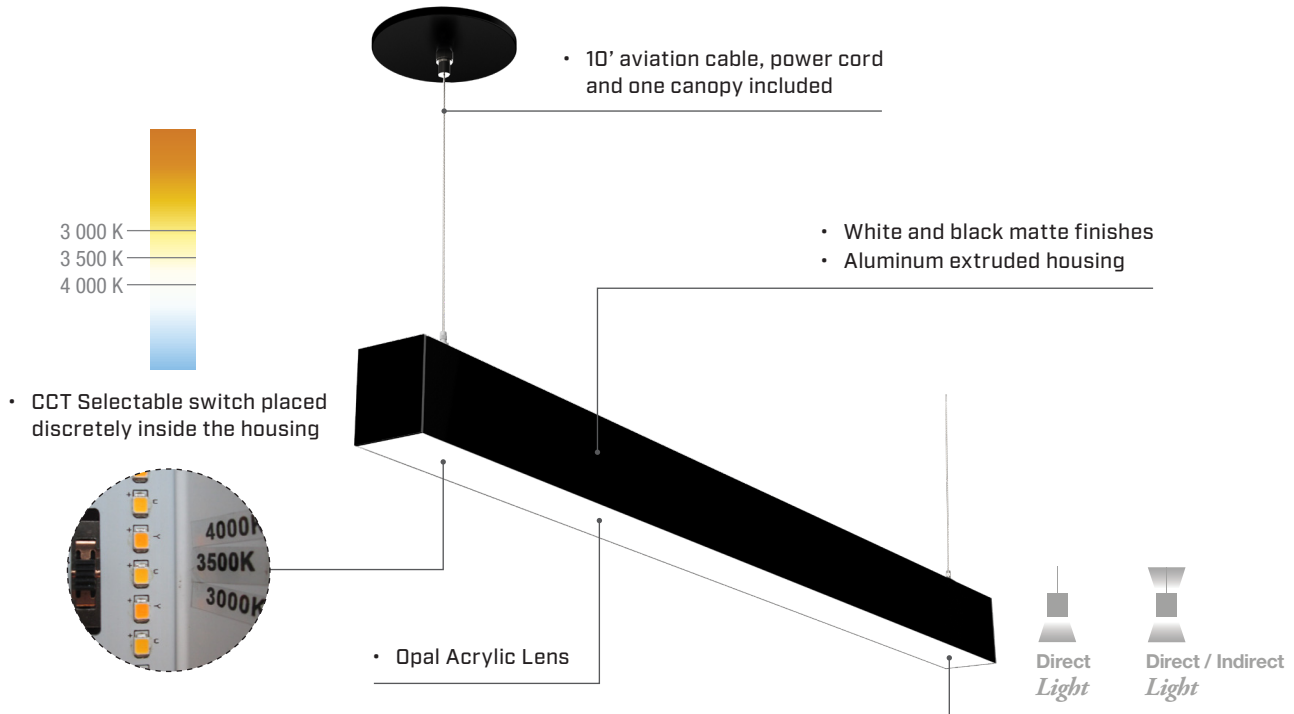

Illuminated Corner Connectors

Available in white and black, down light only




L shape




T shape



X shape



Y shape




120° shape


Create seamless connections



• L-corner connector

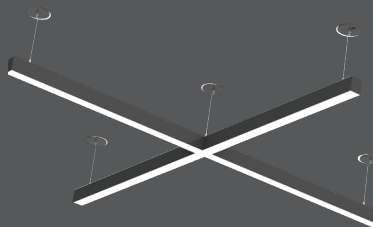

• X-corner connector

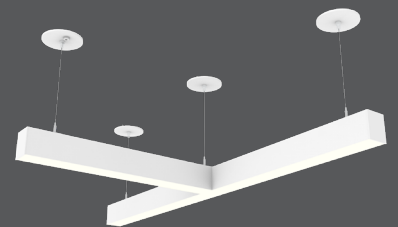

• T-corner connector

For visual purposes only.
Canopy and suspension components may vary depending on configuration.

QUICK SHIP ORDERING GUIDE



PART NO.	DLC UNIQUE ID	WATTS [W]	VOLTS [VAC]	COLOUR TEMP. [K] ¹	LUMEN OUTPUT [LM] ²	EFFICIENCY [LM/W]	CRI	LIFE L70 [HRS] ³	TESTED LM-80 [HRS] ³	FINISH	POWER FACTOR	THD [%]	CASE QTY [MASTER]
2'													
Direct													
AUS-G2-2LA1-3C-WH	S-WBM9K2	20	120-277	3 000/3 500/4 000	2 300 ⁴	115	80+	137 000	9 000	White	>0.9	<15	4
AUS-G2-2LA1-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300	115	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect													
AUS-G2-2LA1U-3C-WH	N/A	20	120-277	3 000/3 500/4 000	2 400 ⁵	120	80+	137 000	9 000	White	>0.9	<15	4
AUS-G2-2LA1U-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300 ⁵	115	80+	137 000	9 000	Black	>0.9	<15	4
4'													
Direct													
AUS-G2-4LA1-3C-WH ⁶	N/A	25	120-277	3 000/3 500/4 000	3 026	121	80+	137 000	9 000	White	>0.9	<15	6
AUS-G2-4LA2-3C-WH	S-W5BT8G	40	120-277	3 000/3 500/4 000	4 600 ⁴	115	80+	137 000	9 000	White	>0.9	<15	6
AUS-G2-4LA2-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 844	121	80+	137 000	9 000	Black	>0.9	<15	6
Direct/Indirect													
AUS-G2-4LA2U-3C-WH	N/A	40	120-277	3 000/3 500/4 000	5 000 ⁵	125	80+	137 000	9 000	White	>0.9	<15	6
AUS-G2-4LA2U-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 800 ⁵	120	80+	137 000	9 000	Black	>0.9	<15	6
8'													
Direct													
AUS-G2-8LA1-3C-WH	S-GXTYKC	80	120-277	3 000/3 500/4 000	9 200 ⁴	115	80+	137 000	9 000	White	>0.9	<15	4
AUS-G2-8LA1-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 760	122	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect													
AUS-G2-8LA1U-3C-WH	N/A	80	120-277	3 000/3 500/4 000	10 000 ⁵	125	80+	137 000	9 000	White	>0.9	<15	4
AUS-G2-8LA1U-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 600 ⁵	120	80+	137 000	9 000	Black	>0.9	<15	4

¹ Typical color temperature range: +/- 5 %.

² Lumen values are based on 3 500 K default setting. Please refer to Quick Ship Technical Specification Table for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

⁴ Lumen values are derived from DLC reported data at 3 000 K. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁵ 25% of lumen delivered uplight / 75% of lumen delivered downlight.

⁶ Fixture is not compatible with the corner connectors.

ILLUMINATED DIRECT CORNER CONNECTORS (ORDER SEPARATELY)

PART NO.	SHAPE	COMPATIBLE WITH	CRI	ENVIRONMENT	DIMMABLE	FINISH	LIFE L70 [HRS]	TESTED LM-80 [HRS]	WARRANTY YEARS	MASTER CASE QTY
AUS-G2-LCON-LA1-WH	L SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	WHITE	137 000	9 000	5	8
AUS-G2-LCON-LA1-BK	L SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	BLACK	137 000	9 000	5	8
AUS-G2-TCON-LA1-WH	T SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	WHITE	137 000	9 000	5	12
AUS-G2-TCON-LA1-BK	T SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	BLACK	137 000	9 000	5	12
AUS-G2-XCON-LA1-WH	X SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	WHITE	137 000	9 000	5	8
AUS-G2-XCON-LA1-BK	X SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	BLACK	137 000	9 000	5	8
AUS-G2-YCON-LA1-WH	Y SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	WHITE	137 000	9 000	5	8
AUS-G2-YCON-LA1-BK	Y SHAPE	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	BLACK	137 000	9 000	5	8
AUS-G2-120C-LA1-WH	120°	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	WHITE	137 000	9 000	5	8
AUS-G2-120C-LA1-BK	120°	AUS GEN2 ONLY	80+	DAMP LOCATION	YES	BLACK	137 000	9 000	5	8

* Straight connection kits (brackets) included with each corner connector.

ACCESSORIES (ORDER SEPARATELY)

PART NO.	TYPE	COMPATIBLE WITH
KIT-CK2	CONTINUOUS KIT FOR ROW MOUNTING	AUSO GEN2 ONLY
KIT-CANOPY-WH	CANOPY KIT WITH SUSPENSION CABLE	AUSO GEN2 ONLY
KIT-CANOPY-BK	CANOPY KIT WITH SUSPENSION CABLE	AUSO GEN2 ONLY

* Please ensure to order a new kit for every fixture added.