## **Aim**Lite

## ALUMBRA - D19P 4' 3 CCT SELECTABLE

#### SUSPENDED RECTANGULAR DIRECT/INDIRECT LIGHTING DISTRIBUTION


# FEATURES


- 3 CCT select (3 000/3 500/4 000 K)
- Suspended cable of 11'
- 45% uplight and 55% downlight
- Higher efficiency of 121 lm/w
- Continuous row mounting with built-in quick connectors








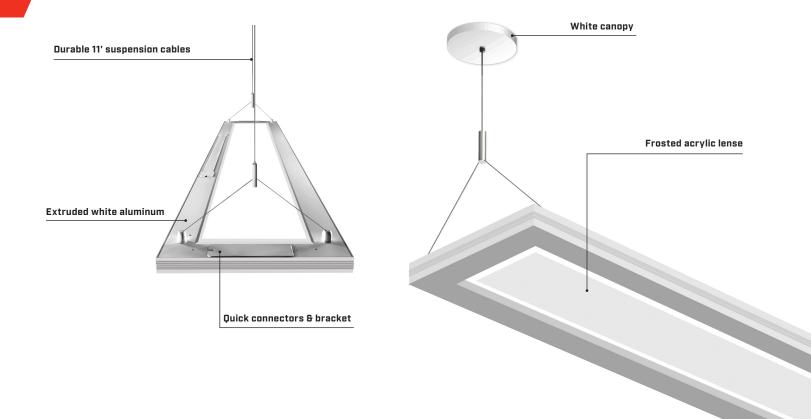

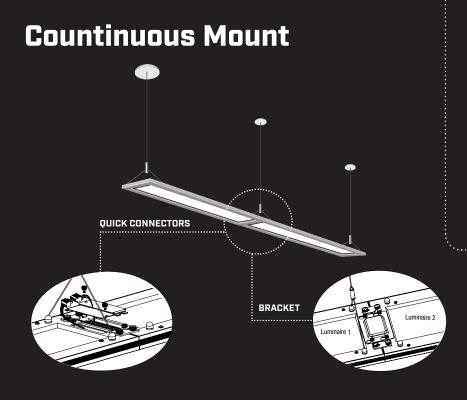

### Dimensions



Only the first ALUMBRA luminaire will be hard wired, while the others are simply using embedded quick connectors inside the luminaires!