



AimLite

PBLV LED BACKLIT PANEL

5 CCT AND 5 POWER SELECTABLE



FEATURES


- 5 CCT Selectable (3 000/3 500/4 000/5 000/6 500 K)
- 5 Power Selectable
- PMMA LED lens
- Unified light diffusion
- 120-347 V
- 0-10 V dimming
- Slim trim design for a frameless look




PBLV

LED BACKLIT PANEL WITH 5 COLOUR TEMPERATURES AND 5 POWER SELECTABLE

- Frosted diffuser for a smooth light output, conforms to standard method of fire test of light diffusers and lenses



- CCT and Power Selectable switches



- 120-347 V,
0-10 V dimmable driver

- Slim trim design for a sleek and frameless look

- Regular panel trim

- Individual PMMA lenses covering each LED chip


- Earthquake-proof hooks to ensure safe installation

- 5 knockouts on the junction box for optimal wiring flexibility

Accessories (sold separately)

Multiple options to install PBLV using these accessories

Surface Mount Kit

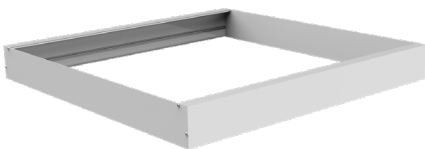

Drywall Kit



Suspension Kit

