



AimLite

# FBL Bullet Flood Light

3 CCT AND 3 POWER SELECTABLE  
INTEGRATED PHOTOCELL



## FEATURES

- Field selectable beam (4x4/5x5/6x6)
- Color temperature selectable (3 000/4 000/5 000 K)
- Integrated photocell which can easily be disabled
- 120-347 V
- Choice of 3 power selectable
- Black housing finish
- Standard knuckle mount with optional ground spike
- This is an ideal luminaire for landscaping or any flood lighting of signages or facades



## QUICK SHIP AND TECHNICAL SPECIFICATION TABLE



| PART NUMBER   | DLC<br>UNIQUE<br>ID | WATTS<br>[W] | VOLTS<br>[V AC] | COLOR<br>TEMP.<br>[K] <sup>1</sup> | LUMEN<br>OUTPUT<br>[LM] <sup>2,3</sup> | EFFICACY<br>[LM/W] | CRI | LIFE<br>L70<br>[HRS] <sup>4</sup> | TESTED<br>HOURS<br>LM-80<br>[HRS] <sup>4</sup> | NEMA TYPE<br>[HXV] | B.U.G.   | FINISH | PHOTOCELL<br>[YES/NO] <sup>5</sup> | PF   | THD<br>[%] | TRADITIONAL<br>EQUIVALENT<br>[W] | MASTER<br>CASE<br>QTY |
|---|---------------------|--------------|-----------------|------------------------------------|--|--------------------|-----|-----------------------------------|--|--------------------|----------|--------|------------------------------------|------|------------|----------------------------------|-----------------------|
| <b>CCT AND POWER SELECTABLE WITH INTEGRATED PHOTOCELL</b> |                     |              |                 |                                    |  |                    |     |                                   |  |                    |          |        |                                    |      |            |                                  |                       |
| <b>FBL-PS25-32-3C-BK</b>                                  | <b>TBD</b>          | 15/20/25     | 120-347         | 3 000/<br>4 000/<br>5 000          | 2 084/<br>2 738/<br>3 199              | 141                | 80+ | 54 000                            | 9 000  | 4X4/5X5/6X6        | B2-U1-G0 | BLACK  | YES                                | >0.9 | <20        | 70-100                           | 16                    |

<sup>1</sup> Typical color temperature range: +/- 5 %.


<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

<sup>4</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

<sup>5</sup> Integrated ON/OFF photocell that can be easily disabled.

## DIMENSIONS AND WEIGHT

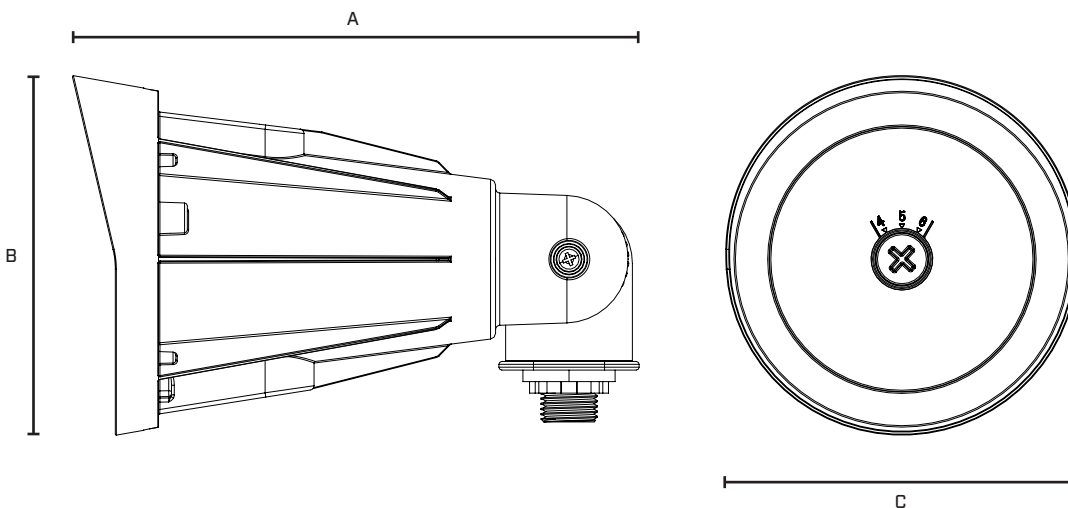

|                  | 25 W          |
|------------------|---------------|
| A in. [cm]       | 7.74" [19.68] |
| B in. [cm]       | 4.79" [12.48] |
| C in. [cm]       | 4.08" [12.22] |
| Net weight [lbs] | 1.32          |

## TOOL-FREE BEAM SELECTION

