

AimLite

W3I-L GEN 2 MINI WALL PACK

**3 CCT Selectable
Integrated Photocell**



FEATURES

- 3 CCT Selectable (3 000/4 000/5 000 K); default setting 4 000 K
- Integrated Photocell 120-277 V
- 0-10 V dimmable
- Distribution type IV



AimLite

W3I-L GEN 2

T 514 227-1288

TF 1 866 348-2374

aimlite.com

QUICK SHIP ORDERING GUIDE




PART NO	DLC UNIQUE ID	WATTS [W]	VOLTS [VAC]	COLOR TEMP. [K]	LUMEN OUTPUT [LM]	EFFICACY [LM/W]	CRI	LIFE L70 [HRS]	TESTED HOURS LM-80 [HRS]	CALCULATED TM21 [HRS]	B.U.G.	DISTRIBUTION TYPE	FINISH	DIMMING	PF	THD [%]	TRADITIONAL EQUIVALENT [W]	MASTER CASE QTY
CCT SELECTABLE WITH INTEGRATED PHOTOCELL ²																		
W3I-LA2B-2-3C-BR-P	PS6S1GS6	20	120-277	3 000/4 000/5 000	2 560	135	80+	54 000	9 000	140 000	B1 U3 G2	IV	BRONZE	YES	≥0.90	≤20	70	10
W3I-LA2B-2-3C-WH-P	PS6S1GS6	20	120-277	3 000/4 000/5 000	2 560	135	80+	54 000	9 000	140 000	B1 U3 G2	IV	WHITE	YES	≥0.90	≤20	70	10

QUICK SHIP: Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

¹Lumen values are derived from DLC reported data at 3 000 K.

²Integrated ON/OFF photocell that can be easily disabled.

CHARACTERISTICS

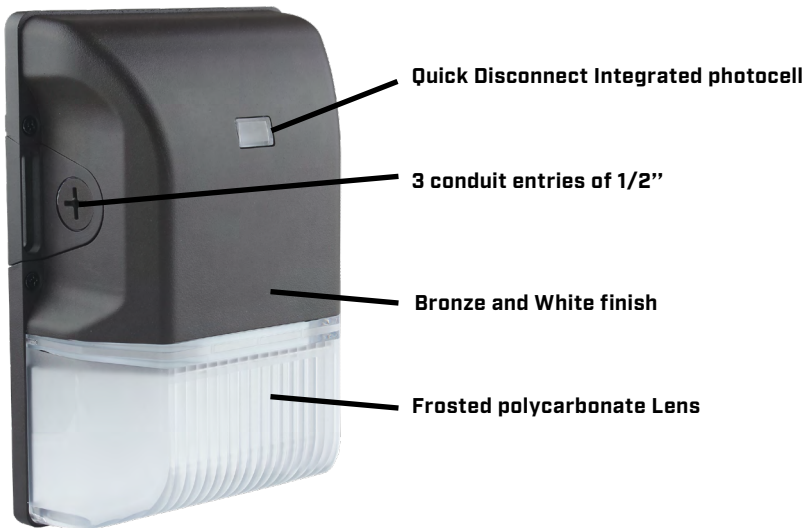

SELECTABLE COLOR TEMPERATURE SWITCH SELECT YOUR CCT 3 000, 4 000 OR 5 000 K UPON INSTALLATION

