



AimLite

WCS Slim LED Wall Pack

3 CCT & POWER SELECTABLE
INTEGRATED PHOTOCELL



FEATURES

- Die-cast aluminum housing available in a bronze and black
- Integrated photocell which can be easily disabled
- CCT and Power select switch that are discretely placed inside the housing
- The housing has four 1/2" conduit entries, located on each side of the housing
- Prismatic tempered glass lens is standard for this series



Bronze



Black



MODEL NUMBER	WATTS [W]	VOLTS [VAC]	COLOR TEMP. [K] ¹	LUMEN OUTPUT [LM] ^{2,3}	EFFICIENCY [LM/W]	CRI	LIFE L70 [HRS] ⁴	BUG	FINISH	PHOTOCELL [YES/NO]	DIMMING [YES/NO]	POWER FACTOR	THD [%]	MASTER CASE QTY
WCS-PS60-32-3C-BK	30/40/60	120-347	30/40/50K	4 200/5 600/8 400	140	80+	50 000	133	BLACK	YES	YES	0.99	20	1
WCS-PS80-32-3C-BK	40/60/80	120-347	30/40/50K	5 600/8 400/11 200	140	80+	50 000	134	BLACK	YES	YES	0.91	20	1
WCS-PS60-32-3C-BR	30/40/60	120-347	30/40/50K	4 200/5 600/8 400	140	80+	50 000	133	BRONZE	YES	YES	0.99	20	1
WCS-PS80-32-3C-BR	40/60/80	120-347	30/40/50K	5 600/8 400/11 200	140	80+	50 000	134	BRONZE	YES	YES	0.91	20	1

QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

¹ Typical color temperature range: +/- 5 %.


² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.


⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations

ACCESSORY (ORDER SEPARATELY)

PART NO	TYPE
WGD913	WIREGUARD

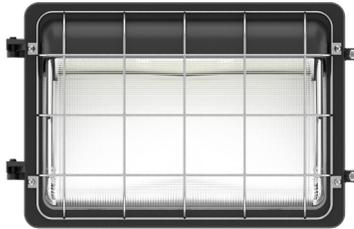

DIMENSIONS AND WEIGHTS

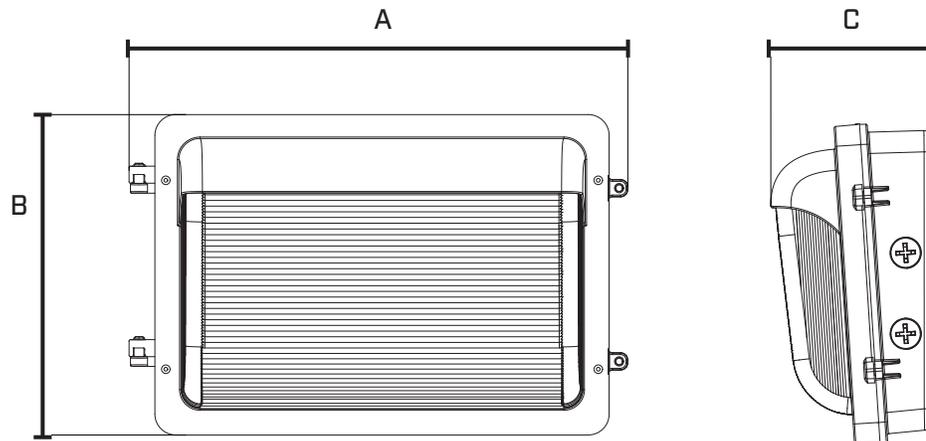

A in. (mm)	13.82" [351]
B in. (mm)	8.88" [2263]
C in. (mm)	4.48" [114]
Net weight (lbs)	9.1