



AimLite

UCS UNDER CANOPY AND GARAGE LIGHT

3 CCT AND 3 POWER SELECTABLE



FEATURES

- Aluminum die cast housing available in bronze and white finishes
- Selectable Color Temperature (3 000/4 000/5 000 K)
- Power Selectable (40/60/70 W)
- Pre-installed sensor receptacle for an easy sensor installation
- Integrated On/Off photocell that can be easily enabled
- Frosted Glass lens



FEATURES

- Side entry for conduit mounting
- 120-347 V photocell
- 3 CCT and power selectable switches, discreetly placed inside the housing
- Compact design
- Frosted glass lens
- Receptacle included to allow for sensor compatibility

HIGH FREQUENCY AND PIR SENSORS (SOLD SEPARATELY)

EASY TO INSTALL AND OPERATE



OSI-EFS06R High
Frequency Sensor



OSI-EFS07-AUX
PIR Sensor Kit




OSI-RM51 Remote




MOUNTING VERSATILITY

- SURFACE MOUNT



- PENDANT MOUNT
(PIPE NOT SUPPLIED)

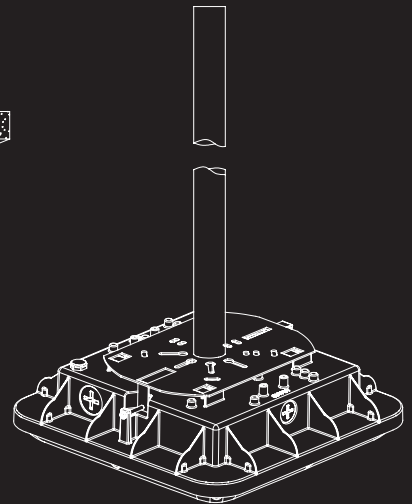

- CONDUIT MOUNT

