Project	Type	Λiml	it∠	\
		Aim	_ (-	_
Catalogue n°	Πate		_ \	_



Transform your interior space with the sleek and distinguished CRPER series of commercial edglit combo. Enjoy a refined aesthetic with the standard recessed mount, elevating the overall appearance.



FEATURES & SPECIFICATIONS

CIRCUITRY

- · LED ultra bright light source
- 120-347 VAC
- 2x 1W high-output LED heads producing 260 lumens
- Maintenance free,
 3.6V Ni-Cad battery
- Damp location
- Operating temperature:
 +10°C to +40°C

MECHANICAL

- Aluminum housing
- Universal faces
- · Recessed mount only
- · White colour is standard
- Fully adjustable, LED heads are standard

SPECIFICATIONS

- Trim and housing made of high grade aluminum
- Backbox made of galvanized
 steel
- All electronics and faceplate mounted to single chassis for rapid and simple installation
- Hanger bars for drywall ceilings or walls included. Maximum extension of 540

 mm
- White powder coat finish standard
- Every unit come standard with multiple running man legends

COMPLIANCE

Meets requirements
 of ICES-005

APPROVALS

- CSA Certified to C22.2 #141-15
- · CSA Certified to C860-1

OVERVIEW	
LIGHT SOURCE	LED
INPUT VOLTAGE (V AC)	120-347
OUTPUT POWER CONSUMPTION (W)	3
LED Q ICES	€


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.



CRPER • REV. 2025-7-28 T 514 227-1288 TF 1 866 348-2374 aimlite.com

CRPER

TYPICAL SPECIFICATION

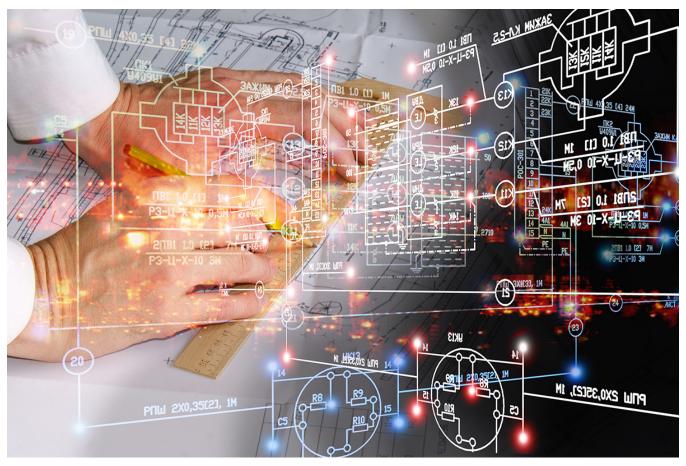

TYPICAL SPECIFICATION

Supply and install Aimlite CRPER Series, The Running Man Edgelit Combination Exit Sign shall operate with AC/DC field selectable 120-347 V AC Input. The Self powered configuration shall be AC field selectable 120-347 V and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using LED ultra-bright light source. The sign shall be suitable for recessed mount and come complete with 3 Running Man fibers for universal direction. The frame shall be extruded aluminum and come complete with an acrylic face plate for maximum uniformity. The Exit Running Man Combination Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Aimlite model number CRPER_______.




TECHINCAL SPECIFICATIONS TABLE



		LIGHT SOURCE	INPUT VOLTS	COLOR
CRPER-1WWHT	UNIVERSAL	LED	120-347	WHITE

DIMENSIONS

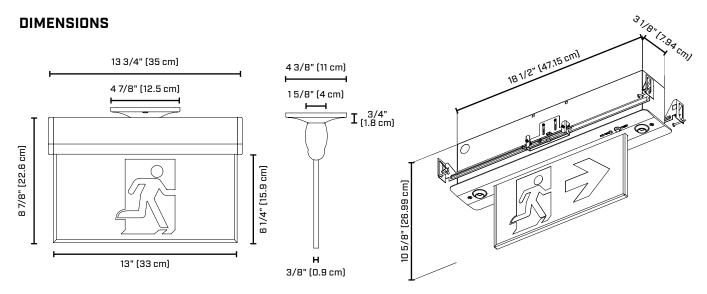

SPACING GUIDE

MOUNTING HEIGHT	SPACING CENTER TO CENTER (FT)
8	40
10	39
15	34
20	24

CONFIGURATIONS











For double face no arrow options, please order: FIBER-ES-ER-O

Comes standard with three pictogram legends for direction selection.