

## Series Spec Sheet

### I INDUSTRIAL REMOTE HEAD NEMA 4X LED

The I series of industrial remote heads are ideal for applications requiring maximum light output. It offers a brightness of up to 2 500 lumens which is perfect for high ceilings and long tunnels. Its cast aluminum housing is rated Nema 4x which makes it resistant to corrosion and wet environments.

#### FEATURES AND SPECIFICATIONS

##### • Mechanical

- Die cast, solid aluminum housing
- Impact resistant acrylic lens
- Stainless steel mounting hardware
- Fully gasketed for protection against wet and dust-filled environments
- LED lamps available in 12 to 24VDC
- Suitable for installation both indoors and outdoors
- White color is standard, black is optional
- Temperature: -35°C to +25°C

##### • Compliances

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005

#### OVERVIEW

Light source	LED
DC voltage (VDC)	12, 24



ICES  
005



## TYPICAL SPECIFICATION



## TYPICAL SPECIFICATION

Remote head shall be Die cast, solid aluminum housing, fully adjustable for maximum spacing both tilt and swivel, fully gasketed for protection against wet and dust-filled environments and be 0 V, 0 W, 0 lumens. The LED's, lens and circuit boards shall be fully integrated in the molded shell to ensure extended life and maximum performance. Fixture shall be supplied with a canopy for installation on any four-inch octagon box. The remote fixtures shall be certified to CSA 22.2 No.141-15, NEMA4X rated and be ICES005 compliant. The remote unit shall be Stanpro model: I \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.

ORDERING GUIDE

I	—					/	
Series	Nbr of heads	Volts (VDC operational)	Watts (W)	Lamp type	Color	Options	
I	1 - Single head 2 - Double head	12-24V - 12 to 24	5W - 5 9W - 9 14W - 14 30W - 30	LJ - LED array	WH - White (standard) BK - Black	LCP - Less Canopy TP - Tamperproof screw	


PHOTOMETRY PERFORMANCE

LED		Lumen output (lm)	Efficiency (lm/W)
5W	LJ	630	126
9W	LJ	1 100	122
14W	LJ	1 460	104
30W	LJ	2 578	85

SPACING GUIDE

Mounting height	Spacing centre to centre (feet)			
	5 W	9 W	14 W	30 W
8 ft	113	165	199	250
10 ft	110	160	194	260
15 ft	99	147	178	239
20 ft	86	133	164	223

DIMENSIONS

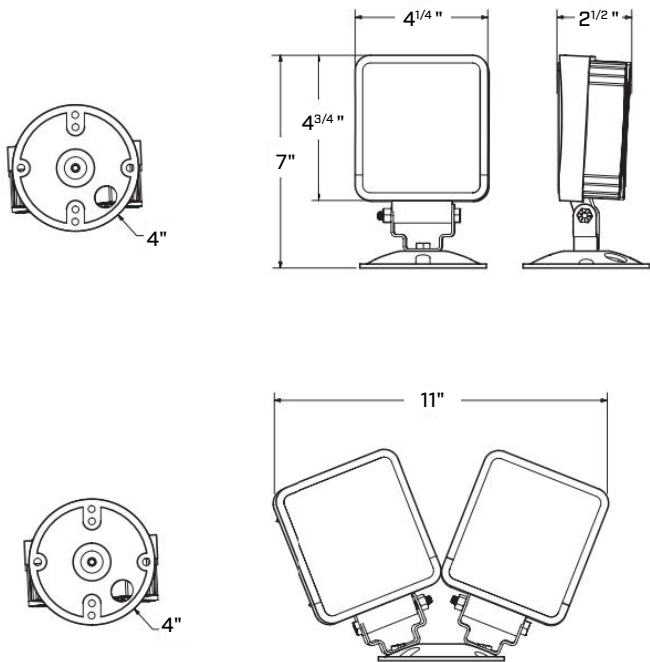

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.