

Series Spec Sheet

LED WALL SCONCE - LINEAR

12", 24", 36", 48"

Our series of linear LED Wall Sconces, equipped with frosted lenses, provide high quality lighting with a CRI 90+ while adding a decorative touch to the application. Adding an LED Wall Sconce adds a decorative element to match the look of a room ; its modern design and smooth lighting can be integrated in a wide variety of decors. These linear LED wall sconces emit a soft white light and are offered in 3 different finishes. They are the perfect solution to everyday needs.

FEATURES AND SPECIFICATIONS

• Construction

Finish

- Housing Color: Brushed Nickel, Black and Chrome
- Available Length: 12", 24", 36" and 48"
- Wrap around frosted polycarbonate lenses

Mounting

Wall mounted horizontally and vertically

• Technical specifications


- 120 VAC
- 3 000 K color temperature
- 5, 10, 15 and 20 W
- Forward and Reverse dimming
- Suitable for damp location
- IP44

• Compliances

- ETL
- Meets requirements of ICES-005, Class B
- FCC

OVERVIEW

Light source	LED
Watts (W)	5-20
Lumen output (lm)	421-1 470
Efficiency (lm/W)	74-90
Color temperature (K)	3 000
CRI	90

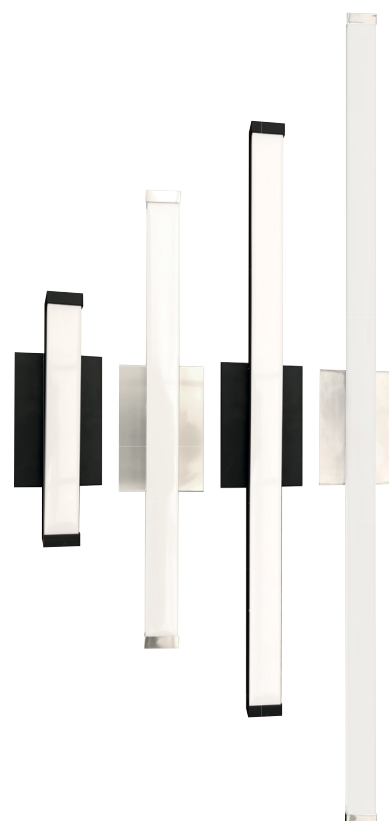


QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕒


Order code	Part number	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ³	Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Master case qty
12"																
67342	SVAN/5W/12IN/30K/CH/F/STD	No	5	120	3 000	443	89	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67344	SVAN/5W/12IN/30K/BK/F/STD	No	5	120	3 000	421	84	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
24"																
67346	SVAN/10W/24IN/30K/CH/F/STD	No	10	120	3 000	879	88	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67347	SVAN/10W/24IN/30K/BN/F/STD	No	10	120	3 000	889	89	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
36"																
67349	SVAN/15W/36IN/30K/CH/F/STD	No	15	120	3 000	1 221	81	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67350	SVAN/15W/36IN/30K/BN/F/STD	No	15	120	3 000	1 219	81	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67351	SVAN/15W/36IN/30K/BK/F/STD	No	15	120	3 000	1 160	77	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
48"																
67352	SVAN/20W/48IN/30K/CH/F/STD	No	20	120	3 000	1 470	74	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10

¹ Typical color temperature range: +/- 5 %.² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

DIMENSIONS

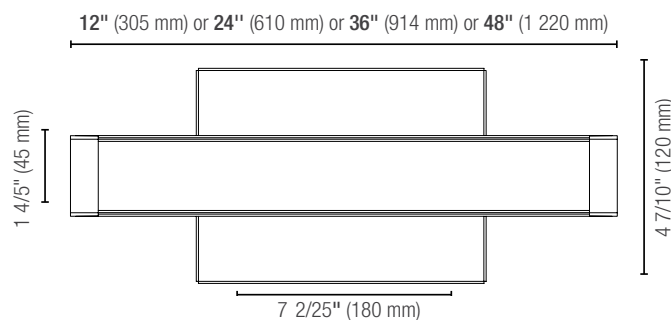

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.

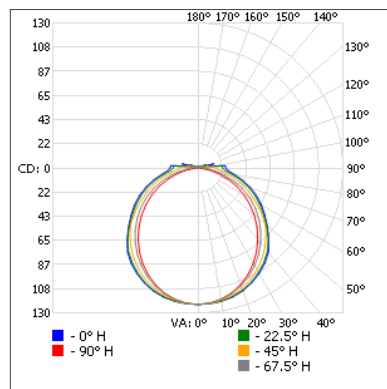
PHOTOMETRIC DATA¹
67342 • SVAN/5W/12IN/30K/CH/F/STD • 405.7 lm
Polar candela distribution

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	95.6	23.6
0-40	157.4	38.8
0-60	282.4	69.6
60-90	101.9	25.1
70-100	65.6	16.2
90-120	19.2	4.7
0-90	384.3	94.7
90-180	21.4	5.3
0-180	405.7	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	42.3
3.3'	11.2
5.0'	4.89
6.7'	2.72
8.3'	1.78
10'	1.22

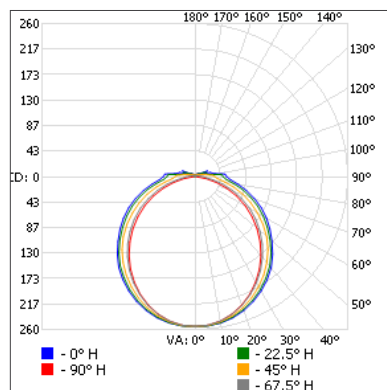Vert. spread: 125.6°	Beam width
Horiz. spread: 105.3°	6.6' 4.5'
	12.8' 8.6'
	19.5' 13.1'
	26.1' 17.6'
	32.3' 21.7'
	38.9' 26.2'


67346 • SVAN/10W/24IN/30K/CH/F/STD • 858.8 lm
Polar candela distribution

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	197.7	23
0-40	324.6	37.8
0-60	582.0	67.8
60-90	212.9	24.8
70-100	139.5	16.2
90-120	51.4	6
0-90	794.9	92.6
90-180	63.9	7.4
0-180	858.8	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	88.2
3.3'	23.4
5.0'	10.2
6.7'	5.68
8.3'	3.70
10'	2.55

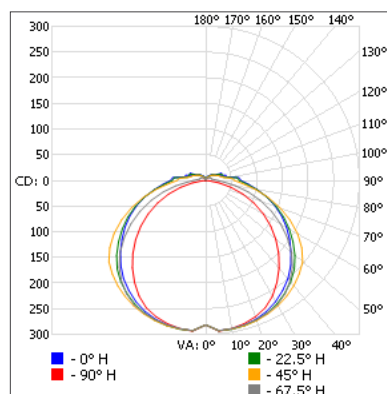Vert. spread: 128.1°	Beam width
Horiz. spread: 105.4°	7.0' 4.5'
	13.5' 8.7'
	20.5' 13.1'
	27.5' 17.6'
	34.1' 21.8'
	41.1' 26.3'

67349 • SVAN/15W/36IN/30K/CH/F/STD • 1 221.1 lm
Polar candela distribution

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	241.2	19.7
0-40	407.8	33.4
0-60	773.0	63.3
60-90	331.8	27.2
70-100	219.4	18
90-120	86.6	7.1
0-90	1 104.8	90.5
90-180	116.3	9.5
0-180	1 221.1	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	97.3
3.3'	25.8
5.0'	11.2
6.7'	6.26
8.3'	4.08
10'	2.81

Vert. spread: 138.4°	Beam width
Horiz. spread: 112.9°	8.9' 5.1'
	17.4' 10.0'
	26.3' 15.1'
	35.2' 20.2'
	43.6' 25.1'
	52.6' 30.2'


¹ Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

PHOTOMETRIC DATA¹

67352 • SVAN/20W/48IN/30K/CH/F/STD • 1 218.1 lm

Polar candela distribution

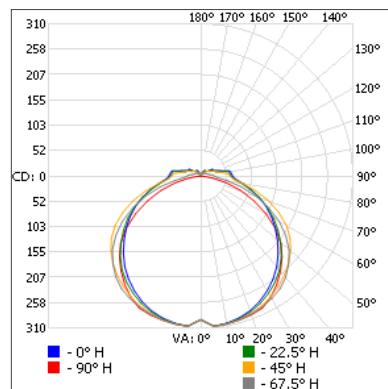

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	248.8	20.4
0-40	418.2	34.3
0-60	785.3	64.5
60-90	312.0	25.6
70-100	207.0	17
90-120	93.9	7.7
0-90	1 097.3	90.1
90-180	120.8	9.9
0-180	1 218.1	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	101	6.8'	6.0'
3.3'	26.9	13.1'	11.6'
5.0'	11.7	19.9'	17.6'
6.7'	6.53	26.6'	23.5'
8.3'	4.25	33.0'	29.2'
10'	2.93	39.7'	35.1'

■ Vert. spread: 126.6°
■ Horiz. spread: 120.7°

¹ Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.