

## Series Spec Sheet

# RMPS

## PLASTIC RUNNING MAN

120/277/347 VAC

The RMPS series is suitable for property management and institutional applications, and is designed using durable and lightweight high impact thermoplastic. Available in AC only, AC & DC, and self-powered versions.

### FEATURES AND SPECIFICATIONS

- **Electrical circuitry - AC & AC/DC**

- LED ultra bright light source
- Transformer driven sign
- 120/277/347 VAC Input, field selectable
- Power consumption :
  - 120 V** = 0.032 A/2.1 W;
  - 277 V** = 0.008 A/1.5 W;
  - 347 V** = 0.012 A/2.0 W
- Power consumption in Emergency mode :
  - 6 VDC** = 0.9 W;
  - 12 VDC** = 0.8 W;
  - 24 VDC** = 1.2 W

- **Circuitry - CEREBRUM**

- Emergency DC wattage as follow:
  - 24 VDC** = 0.10 A/2.4 W
- This unit can be connected to Cerebrum's smart battery unit. Please view the Cerebrum brochure for more details on this technology.

- **Electrical self-powered**

- LED ultra bright light source
- 90 or 120 minutes emergency duration
- 120/277/347 VAC Input, field selectable
- Power consumption:
  - 120 V** = 0.030 A/2.70 W;
  - 277 V** = 0.010 A/2.18 W;
  - 347 V** = 0.012 A/2.64 W
- High-performance Ni-Cad battery

- **Mechanical**

- High impact, UV stabilized, thermoplastic construction
- Well suited for damp locations
- White color is standard
- Universal mounting: ceiling mount, wall mount, end mount

- **Approvals**

- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11



### OVERVIEW

Light source	LED
Input voltage (VAC)	120/277/347
AC input rating	120 V = 0.032 A/2.1 W 277 V = 0.008 A/1.5 W 347 V = 0.012 A/2.0 W
Self powered unit input rating	120 V = 0.030 A/2.70 W 277 V = 0.010 A/2.18 W 347 V = 0.012 A/2.64 W
Energy transfer	Transformer driven
DC power/voltage (Cerebrum)	24 V = 2.4 W

For complete warranty details, please see our terms and conditions in our website



quick  
ship



cerebrum  
compatible



LED  
fixture



Energy Verified  
Energie Vérifiée

## TYPICAL SPECIFICATION



## TYPICAL SPECIFICATION

Supply and install Stanpro RMPS Series, low profile, all plastic Running Man Exit Signs. The sign shall operate with AC/DC field selectable 120/277/347 V AC Input, field selectable Emergency DC voltage as follows 6 V 0.9 W, 12 V 0.9 W, 24 V DC 0.9 W. The Self powered configuration shall be AC field selectable 120/277/347v and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Nichia LED ultra- bright light source. The sign shall be suitable for wall, end, or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and canopy shall not exceed 8 ¼" and shall be constructed of a rigid plastic construction. The Exit Running Man Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Stanpro model number RMPS\_\_\_\_\_.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE** ⌚<sup>1</sup>

Part number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts (VAC)	Color
RMPSOWH-IB	IB	Universal	LED	120/277/347	White
RMPSOWH-UDC	UDC	Universal	LED	120/277/347	White

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**ORDERING GUIDE**

Series	Nbr of faces <sup>1</sup> and mounting	Color	DC Output	Options
RMPS	0 - Universal 1 - Single face <sup>1</sup> 2 - Double face <sup>1</sup>	WH - White	UDC - Universal DC backup voltage from 6 to 24 VDC IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes CER - Cerebrum driver	WGD - Wireguard (separate order) <sup>2</sup> 0 - No indicators (double face only) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL

<sup>1</sup> Unit comes standard as universal face. Single face or double face should only be specified when choosing nonstandard fibers.  
<sup>2</sup> Specify mounting.

**QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at [stanpro.com/quick-ship-product-guide](http://stanpro.com/quick-ship-product-guide). Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.



**WIREGUARD**

	Part number	Dimensions (in)
Wall mount	WGD520-V2	15.75 x 11.5 x 4.5
Ceiling mount	WGD540	14.5 x 6.25 x 10.5
End mount	WGD650-V2	17.75 x 17.75 x 16.50

**LEXAN GUARD**

	Part number	Dimensions (in)
Wall mount	PGD107	14.5 x 11.25 x 5.5
Ceiling mount	PGD100	16 x 10 x 13.5
End mount	PGD106	5.5 x 9.25 x 18.5

**DIMENSIONS**

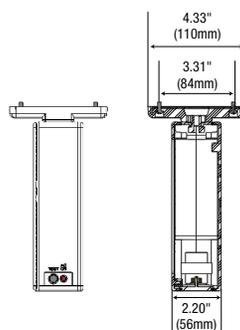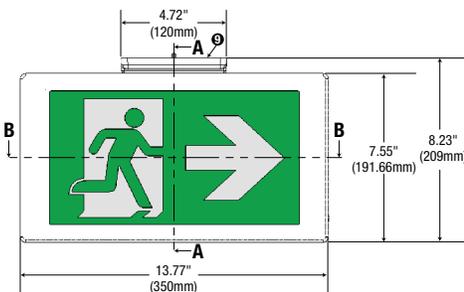

**CONFIGURATIONS**



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, select "0" on the options column.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.