STANPRO

SLEXX/SLSRX

SLEXX

SLSRX

quick ship

EXTRUDED ALUMINUM

NRCan C860 Registered

LED 120/347 V AC Input

Approvals:
CSA Certified to C22.2 #141.15, C860

Energy Verified
Énergie Vérifiée

DESCRIPTION

The clean lines of the SLEXX/SLSRX series of commercial extruded aluminum signs present a fully modern appearance. The extruded aluminum provides for a rigid, durable and lightweight sign. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:
  EXIT: 6 V DC = 1.0W **12 V DC** = 1.4W **24 V DC** = 3.5W
  SORTIE: 6 V DC = 1.3W **12 V DC** = 1.7W **24 V DC** = 3.2W

CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger
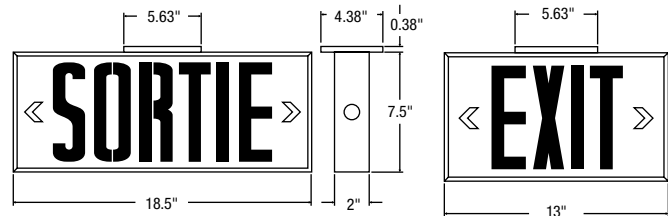
MECHANICAL

- Extruded aluminum construction
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White powder coat finish standard

DIMENSIONS

5.63" 4.38" 0.38" 5.63"

7.5"

18.5" 2" 13"

ORDERING GUIDE

	C			—	/
Series	**Approval**	**Nbr of faces**	**Color**	**DC Voltage***	
SLEXX- (Exit) **SLSRX -**(Sortie)	**C** - C860 Certified	**1** - Single face **2** - Double face	**WH** - White	**UDC** - 6, 12, 24V universal DC **IB** - Self powered for 90 min.	

* If AC only is required, select the UDC option and do not connect the DC wires when installing.