

Series Spec Sheet

SMC2W

VANDAL REMOTE

Double Lexan Cube

6 V, 12 V, & 24 V LED

The SMC2W series of vandal resistant remotes provides reliable emergency lighting in applications typically prone to abuse and tampering. The lamp assemblies are completely shielded within a pair of heavy-duty, single piece, molded Lexan cubes. Each cube can house a single or double assembly. The durable, all steel cabinet utilizes a wrap-around cover plate for added protection and strength. Available in 6 V, 12 V and 24 V models, utilizing LED lamps.

FEATURES AND SPECIFICATIONS

• Electrical

- Heavy-duty, one piece, molded Lexan cube lamp assembly shields
- Up to two small lamp assemblies per cube in a variety of lamp wattages
- Each individual lamp assembly is fully adjustable and aimable
- 20 Gauge steel centre housing c/w stamped universal spider knockout pattern
- White powder coat finish is standard, other colors are optional
- Variety of lamp options:
 - 6 VDC, 12 VDC or 24 VDC
 - LED lamps

• Compliances

- CSA Certified to C22.2 #141-15
- Meets requirement of ICES-005



For complete warranty details, please see our terms and conditions on our website.

ORDERING GUIDE - LED

SMC2W		—				/	
Series	Nbr of heads	Volts (VDC operational)	Watts (W)	Lamp type	Color	Options	
SMC2W	1 - 1 lamp per head (2 lamps)	06-24V - 6 to 24	4W - 4 watts	LR - LED	WH - White (standard) BK - Black	TP - Tamper Proof Screws WGD - Wireguard (order separately)	
	2 - 2 lamps per head (4 lamps)	12-24V - 12 to 24	5W - 5 watts	LA - LED			
	1 - 1 lamp per head (2 lamps)	CER - Cerebrum driver	6W - 6 watts	LA - LED			
	2 - 2 lamps per head (4 lamps)	CER - Cerebrum driver	7W - 7 watts	LA - LED			
			5W - 5 watts				
			2.5 W - 2.5 watts				
			5W - 5 watts				

LEXAN GUARD

Part number	Dimensions (in)
PGD111	19.75 x 14 x 8

WIREGUARD ¹


Part number	Dimensions (in)
WGD590-V2	16.75 x 17.75 x 6.5

¹ Please contact your customer service representative for more information.

LUMEN TABLE

Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

DIMENSIONS

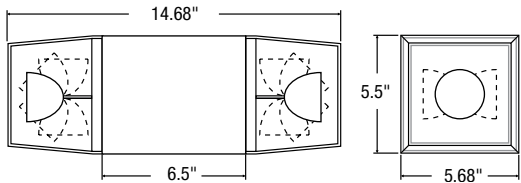

SPACING GUIDE

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.