

## Series Spec Sheet

# CONTEMPORARY ROUND LED WALL SCONCE LUMINAIRE 3 CCT SELECTABLE

Our Contemporary LED Wall Sconce Luminaire series offers the advantage of an integrated 3 color temperature selection.

With a contemporary design in either chrome or brushed nickel finish, our wall sconce luminaires are ideal to add a modern touch to any residential or commercial space.

## FEATURES AND SPECIFICATIONS

### • Construction

#### Physical Characteristics

- Steel housing
- Available finishes: brushed nickel, chrome
- PMMA lens with a frosted finish
- Available size: 24"
- CCT switch is placed on the back of the canopy

#### Mounting

- Wall mounted, surface

### • Performance data

- Available in 3 000/3 500/4 000 K selectable color temperature
- 90+ CRI for true color accuracy
- Electrical ratings: 120 V
- Estimated life of over 50 000 hours to L70
- Phase cut (ELV / Triac) dimming standard
- Operating temperature:  
 -20 °C to 40 °C (-4 °F to 104 °F)

### • Compliances

- cETLus listed for damp locations
- Meets requirements of ICES-005 issue 5 class B for use in residential applications



## OVERVIEW

Light source	LED
Watts (W)	15, 20, 28
Lumen output (lm)	1 350 - 1 524
Efficiency (lm/W)	68 - 76
Color temperature (K)	3 000/3 500/4 000
CRI	90+



**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE**

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2,3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Beam angle (°)	Shape	Finish	Dimming (Yes/No)	Power factor	Master case qty
<b>3 CCT Selectable</b>														
<b>24"</b>														
<b>69031</b>	SVANCO24-R20W-A-3CCH	20	120	3 000/3 500/4 000	1 408	70	90+	50 000	160	Round	Chrome	Yes	≥0.90	4
<b>69037</b>	SVANCO24-R20W-A-3CBN	20	120	3 000/3 500/4 000	1 350	68	90+	50 000	160	Round	Brushed Nickel	Yes	≥0.90	4

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

<sup>4</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

**LUMEN SPECIFICATION TABLE**

Order code	Model number	Watts (W)	3 000 K		3 500 K		4 000 K	
			Lumen output (lm)	Efficiency (lm/W)	Lumen output (lm)	Efficiency (lm/W)	Lumen output (lm)	Efficiency (lm/W)
<b>69031</b>	SVANCO24-R20W-A-3CCH	20	1 408	70	1 524	76	1 509	75
<b>69037</b>	SVANCO24-R20W-A-3CBN	20	1 350	68	1 476	74	1 450	73

**DEFAULT PROGRAMMING**


3 000 K

**COMPATIBLE DIMMERS<sup>1</sup>**

	24"
Brand	Model
Legrand	RH703PTUTC
Cooper	AAL06
Leviton	IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1
Lutron	PD-5NE, PD-6WCL, RRD-6NA-WH, DVCL-153P, CTCL-153P, DVCL-253P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

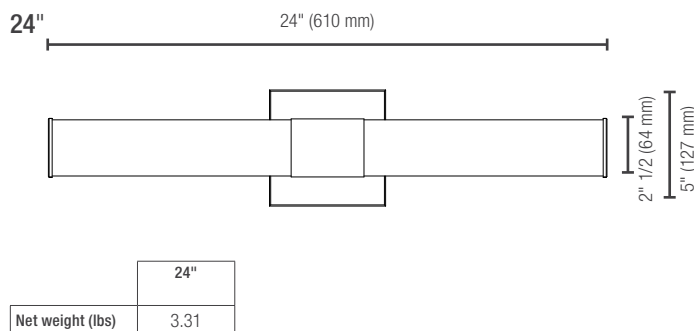
**DIMENSIONS AND WEIGHTS**


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

PHOTOMETRIC DATA<sup>1</sup>

69031 • SVANC024-R20W-A-3CCH • 20 W • 3 000 K • 1 408.3 lm

Polar candela distribution

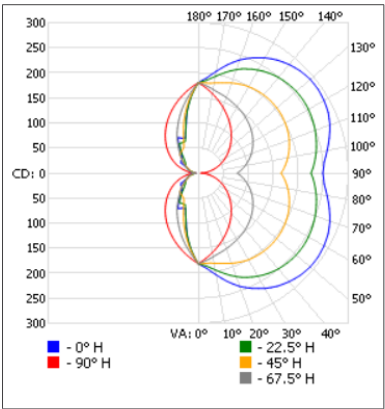

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	122.8	8.7
0-40	206.3	14.6
0-60	406.8	28.9
60-90	297.5	21.1
70-100	283.0	20.1
90-120	297.5	21.1
0-90	704.2	50
90-180	704.1	50
0-180	1 408.3	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	62.5	3.8'	4.6'
3.3'	16.6	7.4'	8.9'
5.0'	7.23	11.3'	13.5'
6.7'	4.03	15.1'	18.1'
8.3'	2.62	18.7'	22.4'
10.0'	1.81	22.5'	27.0'

Vert. spread : 96.7°  
Horiz. spread : 106.9°

<sup>1</sup> Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.