


UVC Lamps

Fluorescent

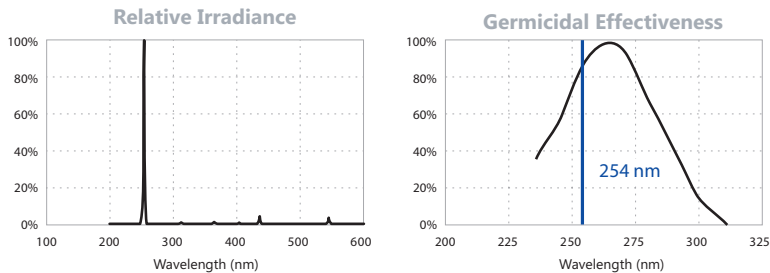

Order code	Description	Watts (W)	Shape	Base*	Starting method	Average life hours	Lamp current (A)	IS=Instant Start ballast		PH=Preheat Start ballast		
								Length in.	Length mm	Diameter in. (mm)	UV output @ 1m $\mu\text{W}/\text{cm}^2$	Case qty
10806	G30T8/PH/G13 EYE	30	T8	G13	PH	8 000	0.36	35 $\frac{5}{32}$	893	1 (26)	117	100
10807	G15T8/PH/G13 EYE	15	T8	G13	PH	8 000	0.30	17 $\frac{5}{32}$	436	1 (26)	49	100
10808	G8T5/PH/G5 EYE	8	T5	G5	PH	6 000	0.17	11 $\frac{9}{32}$	287	$\frac{5}{8}$ (16)	26	100
10809	G6T5/PH/G5 EYE	6	T5	G5	PH	6 000	0.15	8 $\frac{9}{32}$	210	$\frac{5}{8}$ (16)	16.7	100
10810	G4T5/PH/G5 EYE	4	T5	G5	PH	6 000	0.16	5 $\frac{9}{32}$	134	$\frac{5}{8}$ (16)	8.3	100
15842	G36T5/L/IS/FA8	41	T5	Fa8	IS	10 000	0.43	33 $\frac{3}{16}$	843	$\frac{5}{8}$ (16)	130	30
15846	G25T8/RS/G13	25	T8	G13	PH	9 000	0.60	17 $\frac{6}{25}$	438	1 (26)	71	25

* G5 = Min Bipin G13 = Med Bipin Fa8 = Single pin



Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. July 22, 2020

