

Series Spec Sheet

WDP-L

DECORATIVE WALL PACK

3 CCT Selectable and integrated photocell

The WDP-L is a decorative luminaire with an oval, screwless housing, making it easy to install while preserving the integrity of the design. This luminaire is generally used in the following applications: building entry-ways, hotels/condominiums balcony lighting, ect.

FEATURES AND SPECIFICATIONS

• Construction

Physical Characteristics

- Die-cast aluminum housing available in a bronze, black and white finish
- Integrated photocell which can be easily disabled
- CCT select switch is discretely placed inside the housing
- The housing has two 1/2" conduit entries, located at the top and at the back of the housing

Lens

Prismatic polycarbonate lens is standard for this product series.

• Compliances

- cULus listed for Canada and USA
- cULus listed for wet locations
- DLC Premium
- Meets requirements of ICES-005 issue 5 class B for use in residential applications
- IP65
- IK08
- RoHS

• Performance Data

- Available in 3 000/4 000/5 000 K selectable color temperature
- 80+ CRI for true color accuracy
- Electrical ratings: 120-277 V
- Estimated life of over 163 000 hours to L70
- 0-10 V dimming standard
- 2,5 kV surge protection
- Operating temperature: -40 °C to 45 °C (-40 °F to 115 °F)

OVERVIEW

Light source	LED
Watts (W)	15
Lumen output (lm)	1 787-1 937
Efficacy (lm/W)	119-129
Color temperature (K)	3 000/4 000/5 000
CRI	80+



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕒¹

Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficacy (lm/W)	CRI	Life L70 (hrs) ³	Tested hours LM-80 (hrs) ²	Distribution Type	BUG	LED Current (mA)	Finish	Photocell (Yes/No) ⁴	Dimming (Yes/No)	Power factor	THD (%)	Traditional equivalent (W)	Master case qty
CCT Selectable with Integrated Photocell																			
69726	WDP-LS1-W-3C-BR	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	Bronze	Yes	Yes	0.931	7.4	70	17
69727	WDP-LS1-W-3C-BK	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	Black	Yes	Yes	0.931	7.4	70	17
69728	WDP-LS1-W-3C-WH	15	120-277	3 000/4 000/5 000	1 884	132	80+	163 000	9 000	III	B0 U2 G1	0,21-0,057	White	Yes	Yes	0.931	7.4	70	17

¹ Typical color temperature range: +/- 5 %.² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.⁴ Integrated ON/OFF photocell that can be easily disabled.

DLC UNIQUE ID TABLE

Order code	Model number	DLC Premium Unique ID ¹
69726	WDP-LS1-W-3C-BR	S-GYTORM
69727	WDP-LS1-W-3C-BK	S-GYTORM
69728	WDP-LS1-W-3C-WH	S-GYTORM

¹ Primary Use Designation: Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires.

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
69726	WDP-LS1-W-3C-BR	15	1 787	119	1 884	126	1 937	129
69727	WDP-LS1-W-3C-BK	15						
69728	WDP-LS1-W-3C-WH	15						

DEFAULT PROGRAMMING

69726	4 000 K
69727	4 000 K
69728	4 000 K

COMPATIBLE DIMMERS¹


Brand	Model
Lutron	NTSTV-DV, NFTV, DVTW-WH
Leviton	DS710, IP710
Legrand	H4FBL3PW

Dimming range: 0%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

DIMENSIONS AND WEIGHTS

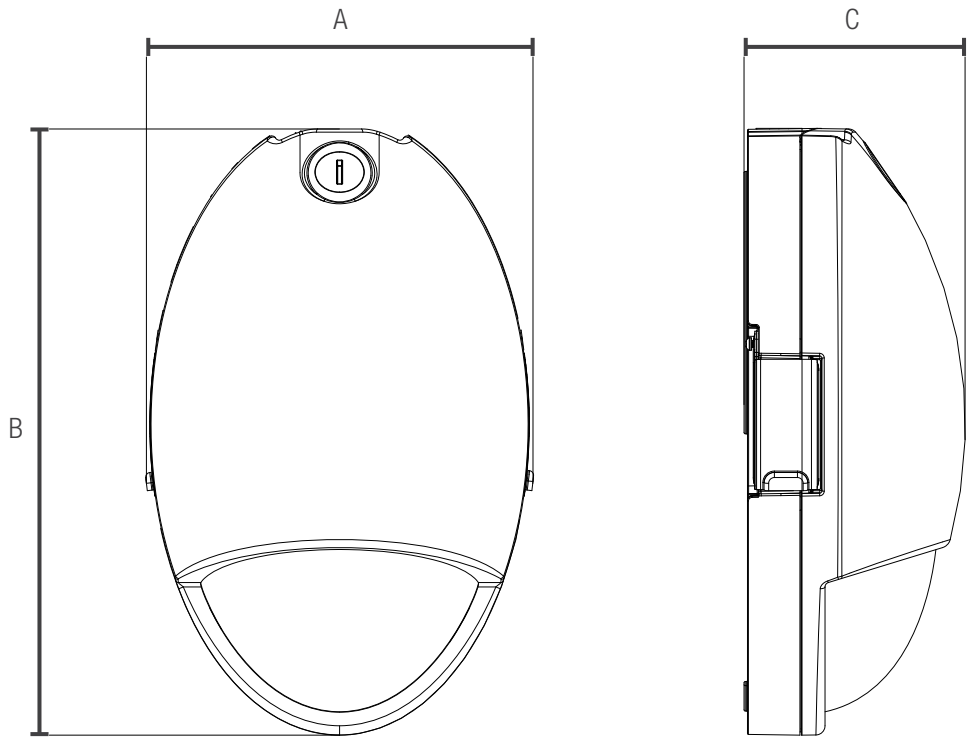


A in. (cm)	6 5/8" (16.8)
B in. (cm)	10 3/8" (26.3)
C in. (cm)	3 3/4" (9.61)
Net weight (lbs)	3.21

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

PHOTOMETRIC DATA¹

69726, 69727, 69728 • WDP-LS1-W-3C-XX • 4 000 K • 1 884 lm

Polar candela distribution

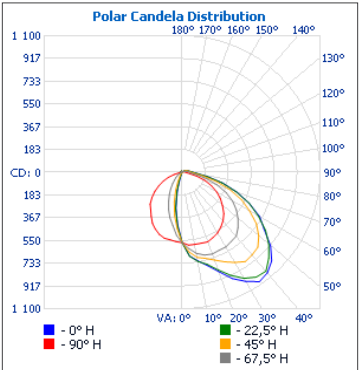

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	418.5	22.2
0-40	712.8	37.8
0-60	1 315.4	71.7
60-90	434.5	23.1
70-100	225.2	12
90-120	71.0	3.8
0-90	1 785.9	94.8
90-180	98.1	5.2
0-180	1 884.1	100

Illuminance at a distance

Center beam fc		Beam width	
17.0'	1.96 fc	23.0'	35.6'
34.0'	0.49 fc	45.9'	71.2'
51.0'	0.22 fc	68.9'	106.8'
68.0'	0.12 fc	91.9'	142.5'
85.0'	0.08 fc	114.8'	178.1'
102.0'	0.05 fc	137.8'	213.7'
Vert. spread: 68.1°			
Horiz. spread: 92.7°			

¹ Complete IES files available on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.