



DECORATIVE AND ACCENT QUICK SHIP



STANPRO

CONTENTS

4	LED WALL SCONCE Traditional / Linia / Impression / Bento
14	LED CYLINDERS PYXIE
20	LED LINEAR ARCHITECTURAL Kolika / Edge
26	LED UNDERCABINET LIGHTING LED Swivel / Fluo LED / Line Voltage Puck Light / Low Voltage Puck Light / DUOLED
38	LED STEP LIGHTS WAY





LED Wall Sconce



Traditional

Our LED Wall Sconces adapt to a variety of applications, as they are available in several different sizes and color temperatures of 3 000 K and 4 000 K. These luminaires operate on line voltage and provide a diffused direct lighting, as well as a 120° angled upward and downward lighting.


These Wall Sconce Luminaires come equipped with double-sided frosted lenses and depending on the desired look, they can be installed with a glossy or matte lens finish.




Order code	Description	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Housing Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
Single																
65838	SVAN/SINGLE/10W/30K/BN/F/STD	Yes	10	120	3 000	628	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65839	SVAN/SINGLE/10W/40K/BN/F/STD	Yes	10	120	4 000	669	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
Double																
65840	SVAN/DOUBLE/20W/30K/BN/F/STD	Yes	20	120	3 000	1 266	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65841	SVAN/DOUBLE/20W/40K/BN/F/STD	Yes	20	120	4 000	1 344	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
Triple																
65842	SVAN/TRIPLE/30W/30K/BN/F/STD	Yes	30	120	3 000	1 917	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65843	SVAN/TRIPLE/30W/40K/BN/F/STD	Yes	30	120	4 000	2 023	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
Quadruple																
65844	SVAN/QUAD/40W/30K/BN/F/STD	Yes	40	120	3 000	2 579	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65845	SVAN/QUAD/40W/40K/BN/F/STD	Yes	40	120	4 000	2 422	61	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6

ACCESSORY


Order code	Description	Type	Finish / color	Compatible with	Case qty (inner/master)
65959	SVAN/LENS/F/STD	Lens for modular vanity and wall sconce	Frosted	65838, 65839, 65840, 65841, 65842, 65843, 65844, 65845	10/200

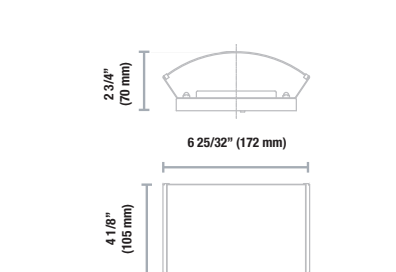


Single



Double

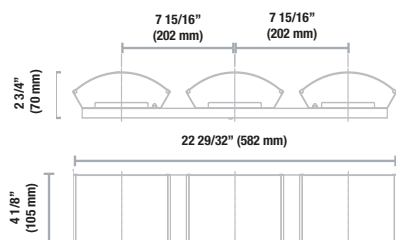

Triple

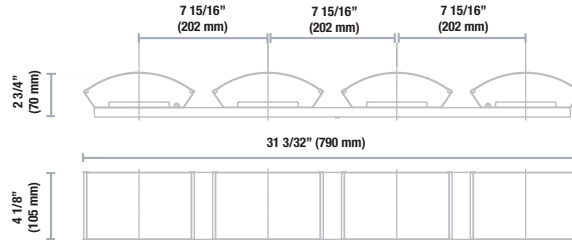

Quadruple

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com



dimmable
fixture



ICES
005



damp
location



5
yrs
warranty



Intertek



FCC






Linia

Create the perfect ambiance for each space with the LINIA LED wall sconce series. Available in different sizes, these luminaires are a perfect blend of modern aesthetics and functionality, making them an ideal lighting solution for a variety of applications.






Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Beam angle (°)	Finish	Dimming (Yes/No)	Power factor	Master case qty
5 CCT selectable														
12"														
69697	SVANLI12-S15W-A-5CBK	15	120	2 700/3 000/3 500/4 000/5 000	956	64	90+	72 000	12 000	140	Black	Yes	≥0.90	4
69698	SVANLI12-S15W-A-5CBN	15	120	2 700/3 000/3 500/4 000/5 000	993	66	90+	72 000	12 000	140	Brushed Nickel	Yes	≥0.90	4
69699	SVANLI12-S15W-A-5CCH	15	120	2 700/3 000/3 500/4 000/5 000	1 008	67	90+	72 000	12 000	140	Chrome	Yes	≥0.90	4
24"														
69700	SVANLI24-S24W-A-5CBK	24	120	2 700/3 000/3 500/4 000/5 000	1 700	71	90+	72 000	12 000	140	Black	Yes	≥0.90	4
69701	SVANLI24-S24W-A-5CBN	24	120	2 700/3 000/3 500/4 000/5 000	1 712	71	90+	72 000	12 000	140	Brushed Nickel	Yes	≥0.90	4
69702	SVANLI24-S24W-A-5CCH	24	120	2 700/3 000/3 500/4 000/5 000	1 752	73	90+	72 000	12 000	140	Chrome	Yes	≥0.90	4

12"



24"

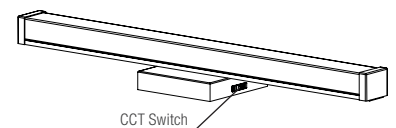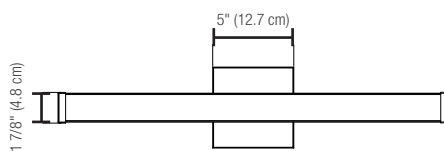

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com





Impression

Our Impression LED Wall Sconce luminaire is the ideal choice for a simple, high quality lighting solution. Take advantage of a slightly larger design that will seamlessly cover previous fixture's footprint, save time as no painting or touch ups are required for retrofit installations. This luminaire also features an integrated 5 color temperature switch allowing for customization to a variety of applications, whether it be residential or a commercial space.



Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Shape	Finish	Dimming (Yes/No)	Power factor	Master case qty
------------	--------------	--------------	----------------	--------------------	----------------------	--------------------	-----	-------------------	-------------------	-------	--------	---------------------	--------------	-----------------

5 CCT Selectable



10"

69562	SVANIM10-R20W-A-5CBN	20	120	2 700/3 000/3 500/4 000/5 000	1 500	75	90+	50 000	100	Round	Brushed Nickel	Yes	≥0.90	4
69563	SVANIM10-R20W-A-5CBK	20	120	2 700/3 000/3 500/4 000/5 000	1 500	75	90+	50 000	100	Round	Black	Yes	≥0.90	4


24"

69564	SVANIM24-R28W-A-5CBN	28	120	2 700/3 000/3 500/4 000/5 000	2 200	79	90+	50 000	100	Round	Brushed Nickel	Yes	≥0.90	4
69565	SVANIM24-R28W-A-5CBK	28	120	2 700/3 000/3 500/4 000/5 000	2 200	79	90+	50 000	100	Round	Black	Yes	≥0.90	4

10"

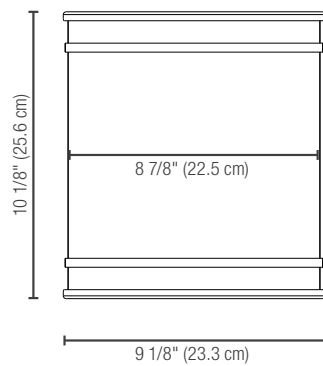

24"

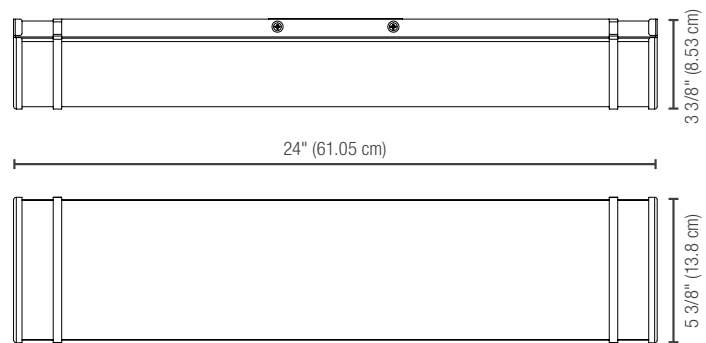

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com






Bento

Set the tone and accentuate the overall visual appeal with BENTO. This luminaire is a versatile addition to any lighting scheme as it creates focal points with directional lighting, increases functionality, and adds a decorative touch to both indoor and outdoor applications. Simply adjust the beam angles and select the color temperature to create the perfect lighting environment. Second to none, BENTO is the perfect lighting solution to add depth to any space and create an inviting atmosphere.




Order code	Model number	Watts (W)	Volts (V AC)	Color temp. (K)	Lumen output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Beam angle (°)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Master case qty
5 CCT Selectable															
70187	SCONBO-15W-A-5CWH	15	120	2 700/3 000/3 500/4 000/5 000	724	48	90+	50 000	9 000	95	White	Yes	≥0.90	≤15	10
70188	SCONBO-15W-A-5CBK	15	120	2 700/3 000/3 500/4 000/5 000	623	42	90+	50 000	9 000	95	Black	Yes	≥0.90	≤15	10


Front view

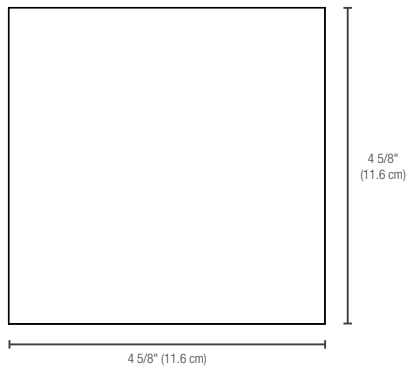


Top view

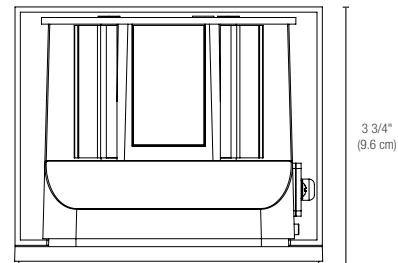

CCT Switch

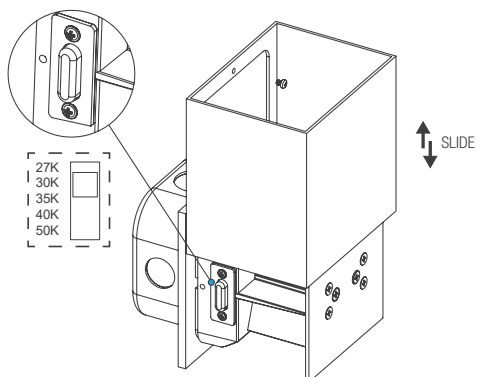

Beam angle

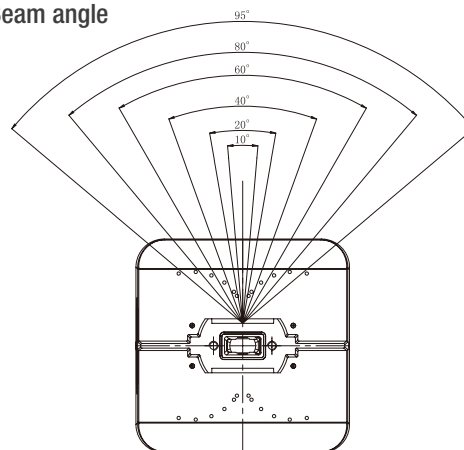

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com







LED Cylinders

PYXIE

PYXIE takes cylinders to a new level of versatility; combining a sleek design with a modular concept, 6 different mountings can be achieved using the same cylinder module. Perfect to ensure a harmonious and coherent visual experience from space to space or even within the same space. Available in black or white, PYXIE cylinders also come with an integrated selection of 5 color temperatures, ideal to fit any residential or commercial application.



CYLINDER MODULE¹

Order code	Model number	Watts	Volts	Color temp.	Lumen output	Efficacy	CRI	Life L70	Tested hours LM-80	Beam angle	Finish	Dimming	Power factor	THD	Master case qty
		(W)	(V AC)	(K)	(lm)	(lm/W)		(hrs)	(hrs)	(°)		(Yes/No)		(%)	
5 CCT Selectable															
69866	CYLPY2-MOD-15W-A-5CWH	15	120	2 700/3 000/3 500/4 000/5 000	1 067	71	90+	108 000	18 000	40	White	Yes	≥0.90	≤20	12
69867	CYLPY2-MOD-15W-A-5CBK	15	120	2 700/3 000/3 500/4 000/5 000	1 067	71	90+	108 000	18 000	40	Black	Yes	≥0.90	≤20	12

¹ Mounting kit is required to complete the installation of PYXIE cylinders.

MOUNTING KITS¹ (order separately)

Order code	Model number	Type	Finish	Environment	Compatible with	Master case qty	Figure
69872	CYLPY2-ACC-SURFACE-KIT-WH	Surface mounting kit	White	Wet	69866	24	A
69873	CYLPY2-ACC-SURFACE-KIT-BK	Surface mounting kit	Black	Wet	69867	24	A
69874	CYLPY2-ACC-MONOPPOINT-KIT-WH	Monopoint mounting kit	White	Damp	69866	24	B
69875	CYLPY2-ACC-MONOPPOINT-KIT-BK	Monopoint mounting kit	Black	Damp	69867	24	B
69876	CYLPY2-ACC-SUSPENSION-KIT-WH	Suspension mounting kit with 8' cable (adjustable)	White	Damp	69866	24	C
69877	CYLPY2-ACC-SUSPENSION-KIT-BK	Suspension mounting kit with 8' cable (adjustable)	Black	Damp	69867	24	C
69878	CYLPY2-ACC-RECESSED-KIT-WH	Recessed mounting kit	White	Wet	69866	24	D
69879	CYLPY2-ACC-RECESSED-KIT-BK	Recessed mounting kit	Black	Wet	69867	24	D
69880	CYLPY2-ACC-TRACK-KIT-WH	Track mounting kit (J Type)	White	Dry	69866	24	E
69881	CYLPY2-ACC-TRACK-KIT-BK	Track mounting kit (J Type)	Black	Dry	69867	24	E
69882	CYLPY2-ACC-TRACK-SUSP-KIT-WH	Suspension track mounting kit with 8' cable adjustable (J Type)	White	Dry	69866	24	F
69883	CYLPY2-ACC-TRACK-SUSP-KIT-BK	Suspension track mounting kit with 8' cable adjustable (J Type)	Black	Dry	69867	24	F

¹ Mounting kit is required to complete the installation of PYXIE cylinders.




ACCESSORIES¹ (order separately)

Order code	Type	Finish	Environment	Compatible with	Case qty (master)	Figure
69884	Decorative 1" straight snoot accessory	White	Wet	69866	24	A
69885	Decorative 1" straight snoot accessory	Black	Wet	69867	24	A
69886	Decorative 2" wall wash snoot accessory	White	Wet	69866	24	B
69887	Decorative 2" wall wash snoot accessory	Black	Wet	69867	24	B

¹ Decorative accessories are optional, to complement installation.




CYLINDER MODULE

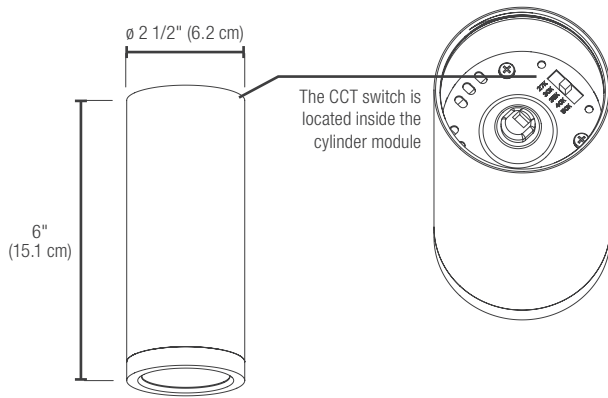


ACCESSORIES

STRAIGHT SNOOT




WALL WASH SNOOT

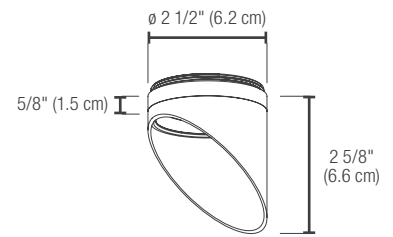


MOUNTING KITS


SURFACE

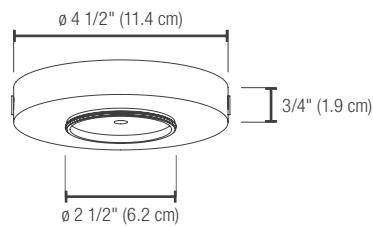


MONOPOINT

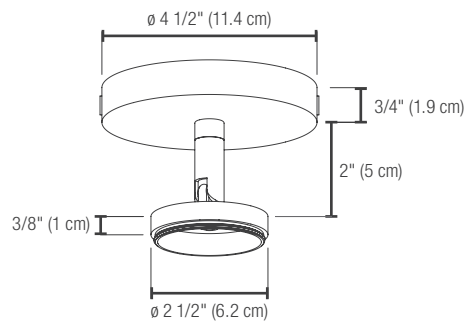


SUSPENDED

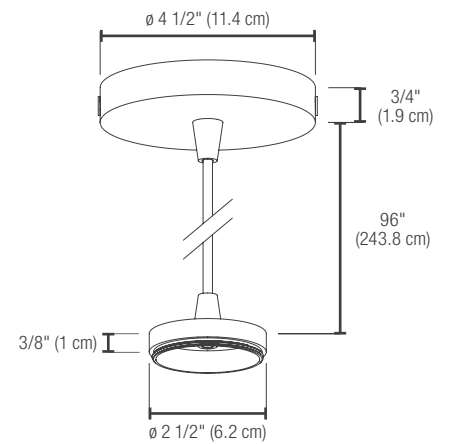


RECESSED

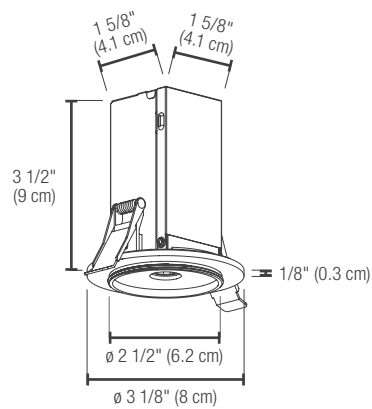

TRACK

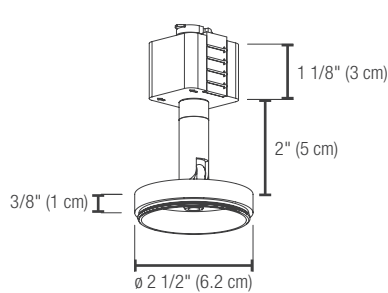

TRACK SUSPENDED

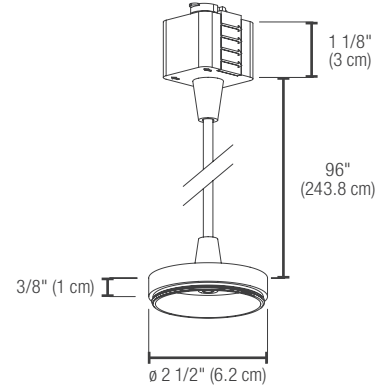



PYXIE WALL MOUNT

PYXIE wall mount cylinders offer a sleek, aesthetic design, adding dimension and effective lighting to the chosen space. Available in both downlight and uplight/downlight, these luminaires feature an integrated 5 CCT selectable switch as well as 3 interchangeable beams (included in the box), perfect to adapt to a variety of indoor and outdoor applications. Additional snoot accessory options are available to create a lighting solution that complements each space.



Order code	Model number	Watts (W)	Volts (V AC)	Color temp. (K)	Lumen output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Beam angle (°)	Finish	Dimming (Yes/No)	Power factor (%)	THD (%)	Master case qty
------------	--------------	--------------	-----------------	--------------------	----------------------	--------------------	-----	-------------------	-----------------------------	-------------------	--------	---------------------	---------------------	------------	-----------------

5 CCT Selectable

Downlight

69868	CYLPY2-WS-15W-A-5CWH	15	120	2 700/3 000/3 500/4 000/5 000	1 034	69	90+	108 000	18 000	40	White	Yes	≥0.90	≤20	12
69869	CYLPY2-WS-15W-A-5CBK	15	120	2 700/3 000/3 500/4 000/5 000	1 034	69	90+	108 000	18 000	40	Black	Yes	≥0.90	≤20	12


Uplight/Downlight

69870	CYLPY2-WD-30W-A-5CWH	30	120	2 700/3 000/3 500/4 000/5 000	2 274	76	90+	108 000	18 000	40	White	Yes	≥0.90	≤20	12
69871	CYLPY2-WD-30W-A-5CBK	30	120	2 700/3 000/3 500/4 000/5 000	2 274	76	90+	108 000	18 000	40	Black	Yes	≥0.90	≤20	12


ACCESSORIES¹ (order separately)

Order code	Type	Finish	Environment	Compatible with	Case qty (master)	Figure
69884	Decorative 1" straight snoot accessory	White	Wet	69868, 69870	24	A
69885	Decorative 1" straight snoot accessory	Black	Wet	69869, 69871	24	A
69886	Decorative 2" wall wash snoot accessory	White	Wet	69868, 69870	24	B
69887	Decorative 2" wall wash snoot accessory	Black	Wet	69869, 69871	24	B


¹ Decorative accessories are optional, to complement installation.

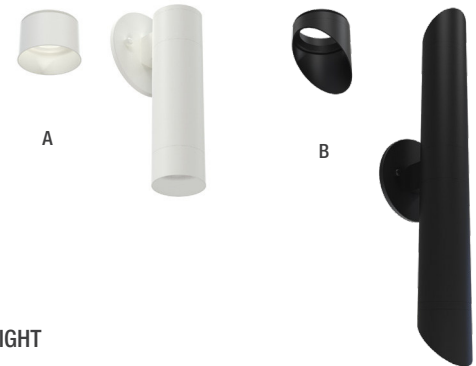

DOWNLIGHT

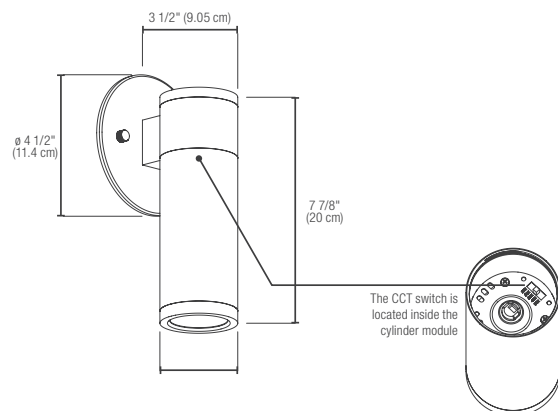

DOWNLIGHT/UPLIGHT

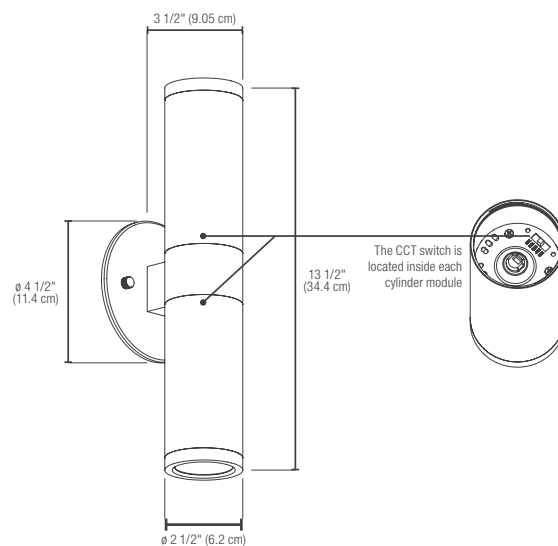

Lumen values are derived from Energy Star reported data.
For a complete list of compatible dimmers, please visit www.standardpro.com








LED Architectural Luminaires

LED Linear KOLIKA - L1KCL GEN.2

The KOLIKA fixture offers sleek and lightweight design, making it the perfect choice for creating a modern atmosphere in any office, commercial or retail space. These 2', 4' and 8' fixtures are available in a black or white matte finish and features the versatility to change the color temperature using a simple switch located inside the fixture. The KOLIKA GEN. 2 series also includes a stylish up and down light option, which provides a lovely indirect diffused light with more light directed downward to light up the desired space efficiently. The fixture can be connected in continuous straight row system or create different shapes and configurations using corner connectors accessories providing linear illumination.

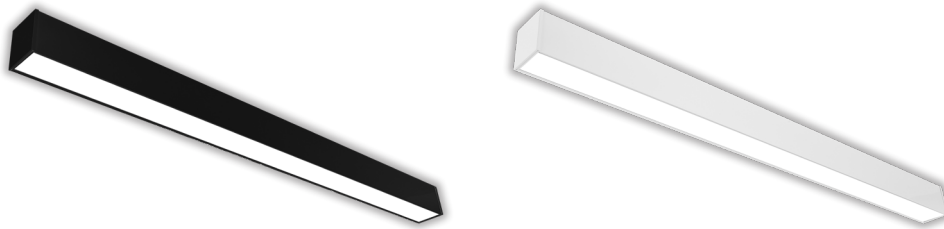


Order code	Model number	DLC Unique ID	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen Output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Tested LM-80 (hrs)	Finish	Power factor	THD (%)	Case qty (master)
2'														
Direct														
69604	L1KCL-G2-2LS1-3C-WH	S-DZMZCH	20	120-277	3 000/3 500/4 000	2 300	115	80+	137 000	9 000	White	>0.9	<15	4
69605	L1KCL-G2-2LS1-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300	115	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect														
69606	L1KCL-G2-2LS1U-3C-WH	N/A	20	120-277	3 000/3 500/4 000	2 400	120	80+	137 000	9 000	White	>0.9	<15	4
69607	L1KCL-G2-2LS1U-3C-BK	N/A	20	120-277	3 000/3 500/4 000	2 300	115	80+	137 000	9 000	Black	>0.9	<15	4
4'														
Direct														
68575	L1KCL-G2-4LS1-3C-WH	N/A	25	120-277	3 000/3 500/4 000	3 026	121	80+	137 000	9 000	White	>0.9	<15	6
68576	L1KCL-G2-4LS2-3C-WH	S-PHBN72	40	120-277	3 000/3 500/4 000	4 600	115	80+	137 000	9 000	White	>0.9	<15	6
68577	L1KCL-G2-4LS2-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 844	121	80+	137 000	9 000	Black	>0.9	<15	6
Direct/Indirect														
68578	L1KCL-G2-4LS2U-3C-WH	N/A	40	120-277	3 000/3 500/4 000	5 000	125	80+	137 000	9 000	White	>0.9	<15	6
68579	L1KCL-G2-4LS2U-3C-BK	N/A	40	120-277	3 000/3 500/4 000	4 800	120	80+	137 000	9 000	Black	>0.9	<15	6
8'														
Direct														
68580	L1KCL-G2-8LS1-3C-WH	S-2M4KCN	80	120-277	3 000/3 500/4 000	9 200	115	80+	137 000	9 000	White	>0.9	<15	4
68581	L1KCL-G2-8LS1-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 760	122	80+	137 000	9 000	Black	>0.9	<15	4
Direct/Indirect														
68582	L1KCL-G2-8LS1U-3C-WH	N/A	80	120-277	3 000/3 500/4 000	10 000	125	80+	137 000	9 000	White	>0.9	<15	4
68583	L1KCL-G2-8LS1U-3C-BK	N/A	80	120-277	3 000/3 500/4 000	9 600	120	80+	137 000	9 000	Black	>0.9	<15	4

ACCESSORIES (order separately)

Order code	Model number	Type	Compatible with
68584	KIT-CK2	Continuous kit for row mounting	L1KCL Gen2 Only
69097	KIT-CANOPY-WH	Canopy Kit with suspension cable	L1KCL Gen2 Only
69098	KIT-CANOPY-BK	Canopy Kit with suspension cable	L1KCL Gen2 Only
69608	L1KCL-G2-L90CON-LS1-WH	L corner connector	L1KCL Gen2 Only
69609	L1KCL-G2-L90CON-LS1-BK	L corner connector	L1KCL Gen2 Only
69610	L1KCL-G2-TCON-LS1-WH	T corner connector	L1KCL Gen2 Only
69611	L1KCL-G2-TCON-LS1-BK	T corner connector	L1KCL Gen2 Only
69612	L1KCL-G2-XCON-LS1-WH	X corner connector	L1KCL Gen2 Only
69613	L1KCL-G2-XCON-LS1-BK	X corner connector	L1KCL Gen2 Only
69614	L1KCL-G2-YCON-LS1-WH	Y corner connector	L1KCL Gen2 Only
69615	L1KCL-G2-YCON-LS1-BK	Y corner connector	L1KCL Gen2 Only
69616	L1KCL-G2-120CON-LS1-WH	120-degree corner connector	L1KCL Gen2 Only
69617	L1KCL-G2-120CON-LS1-BK	120-degree corner connector	L1KCL Gen2 Only

* Please ensure to order a new kit for every fixture added.

* Straight connection kits (brackets) included with each corner connector.

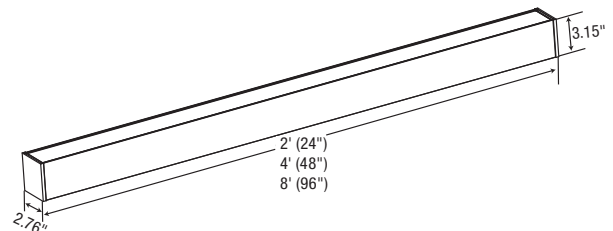


KOLIKA - R1KCL LED Architectural Ring Suspende

Create an exceptional space with the well thought out features the KOLIKA RING has to offer by enhancing the overall appearance, functionality and ambiance in a space. The sleek, modern design of the fixture allows to adjust wattage and color temperatures, as well as the direct and indirect light ratio, providing an elevated aesthetic that complements offices, reception areas, lobbies, restaurants, and retail applications.




Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Beam angle (°)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Master case qty
4 CCT and 4 Power Selectable															
24"															
70335	R1KCL-2LS1U-PS40-4CWH	10/20/30/40	120-347	3 000/3 500/4 000/5 000	829/1 628/2 339/3 186	83/81/78/80	90+	>54 000	9 000	114	White	Yes	≥0.90	≤20	1
70336	R1KCL-2LS1U-PS40-4CBK	10/20/30/40	120-347	3 000/3 500/4 000/5 000	647/1 286/1 885/2 562	65/64/63/64	90+	>54 000	9 000	114	Black	Yes	≥0.90	≤20	1
36"															
70337	R1KCL-3LS1U-PS80-4CWH	50/60/70/80	120-347	3 000/3 500/4 000/5 000	4 137/4 924/5 758/6 535	83/82/82/82	90+	>54 000	9 000	114	White	Yes	≥0.90	≤20	1
70338	R1KCL-3LS1U-PS80-4CBK	50/60/70/80	120-347	3 000/3 500/4 000/5 000	3 583/4 291/4 884/5 598	72/72/70/70	90+	>54 000	9 000	114	Black	Yes	≥0.90	≤20	1
48"															
70339	R1KCL-4LS1U-PS100-4CWH	60/80/90/100	120-347	3 000/3 500/4 000/5 000	4 974/6 522/7 425/8 306	83/82/83/83	90+	>54 000	9 000	114	White	Yes	≥0.90	≤20	1
70340	R1KCL-4LS1U-PS100-4CBK	60/80/90/100	120-347	3 000/3 500/4 000/5 000	4 127/5 442/6 216/6 943	69/68/69/69	90+	>54 000	9 000	114	Black	Yes	≥0.90	≤20	1


24"



36"



48"

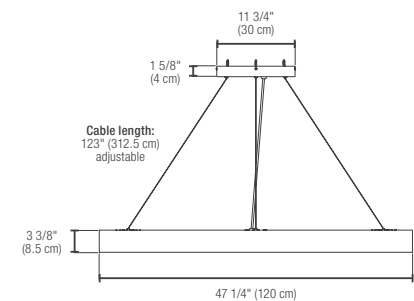




T-GRID LED LINEAR LIGHT

The L3CTG is available in 2' and 4' which can be compatible to 15/16" standard suspended ceilings system. This product offers lighting designers more freedom to design since the LED module can follow the ceiling elements in many different ways. It is suitable for commercial and architectural environments that require a unique and elegant lighting design.




Order code	Model number	DLC unique ID	Width (in)	Watts (W)	Color temp. (K)	Lumen (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Cable rating	Lens finish	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
2"															
68025	L3CTG-0215LS1/35K	PL5RUZGG1HAH	15/16	10	3 500	1 260	126	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68026	L3CTG-0215LS1/40K	PLA2M5KQG1TF	15/16	10	4 000	1 320	132	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
4"															
68027	L3CTG-0415LS2/35K	PLBJ29RKP4E	15/16	20	3 500	2 540	127	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68028	L3CTG-0415LS2/40K	PLERYM5Z9ZTU	15/16	20	4 000	2 670	133	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18

L3CTG-02

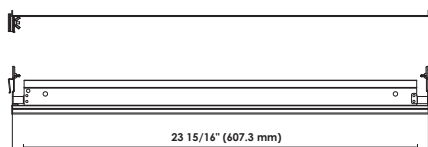

L3CTG-04

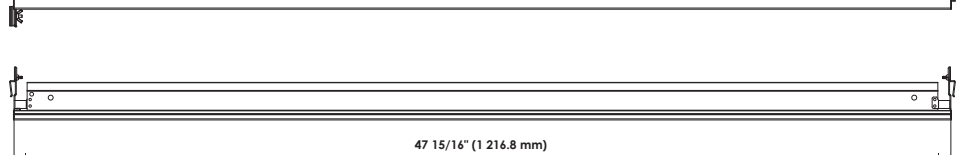




EDGE

The EDGE is a light weight, linear suspended LED luminaire offering excellent uniform direct/indirect lighting distribution, allowing for the perfect addition to any modern office space. Available in a single color temperature or with selectable color temperature via a simple switch positioned on the top of the luminaire. Its mounting options provide versatility; it can be mounted individually in 4' and 8' sections or connected to create a continuous row system providing linear illumination.




Order code	Model number	Watts (W)	Volt (VAC)	Color temp. (K) ²	Lumen (lm) ³	Efficiency (lm/W)	CRI	Life L70 (hrs) ⁴	Dimming (Yes/No)	Finish	Power factor	THD (%)	Case qty (master)
48"													
L1DIP-4LS1/35K		40	120-277	3 500	4 200	105	80+	50 000	Yes	White	>0.9	<20	3
48" 3 CCT Selectable													
68965	L1DIP-G2-4LS1-3C	40	120-277	3 000/3 500/4 000	4 825	115	80+	54 000	Yes	White	>0.9	<20	2
96"													
L1DIP-8LS1/40K		80	120-277	4 000	8 400	105	80+	50 000	Yes	White	>0.9	<20	2

L1DIP-4

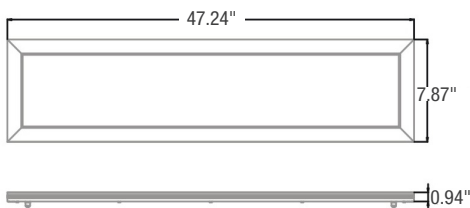

L1DIP-8

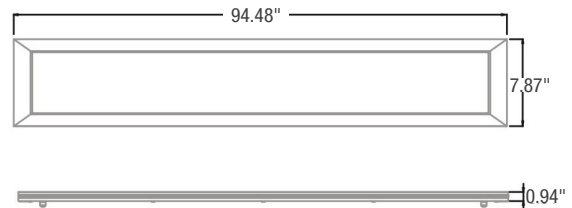





LED Undercabinet Lighting



LED Swivel (120 V)

The LED Swivel is the perfect solution to replace traditional Xenon undercabinet luminaires. Working directly off of line voltage, no LED driver is required and hardwired connections can be made directly inside the luminaire. For a quick and easy installation, use the 120V power cord plug to make the connection to the power outlet.

The LED Swivel also offers the option to swivel the module and direct the light where desired, depending on the needs of the application. The selectable color temperature feature enables to set the light to the right mood or activity; whether you need a warm and cozy atmosphere or a cooler task lighting.



- Selectable color temperature switch - 2 700 K / 3 000 K / 4 000 K
- Selectable power switch - two intensities
- For an installation without interruption, use the end to end connector
- Up to 300 W can be daisy chained
- 5 different lengths available


LED SWIVEL

Order code	Part number	Watts (W)	Volts (VCA)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Case qty (master)
9"															
68481	UCS/9IN/120V/3W/SEL/FR/WH	1.5/3	120	2 700/3 000/4 000	108/204	58	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
12"															
67194	UCS/12IN/120V/5W/SEL/FR/WH/STD	2.5/5	120	2 700/3 000/4 000	195/359	60	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
18"															
67195	UCS/18IN/120V/8W/SEL/FR/WH/STD	4/8	120	2 700/3 000/4 000	365/624	65	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
24"															
67196	UCS/24IN/120V/12W/SEL/FR/WH/STD	6/12	120	2 700/3 000/4 000	508/906	67	90	50 000	104	White	Frosted	Yes	>0.90	<15	10
32"															
67197	UCS/32IN/120V/16W/SEL/FR/WH/STD	8/16	120	2 700/3 000/4 000	573/1 038	66	90	50 000	104	White	Frosted	Yes	>0.90	<15	10

¹Lower lumen output / Highest lumen output at 3000K


INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
1	1/2" Romex Hardwired Connector
1	End to End Connector
2	Mounting screws

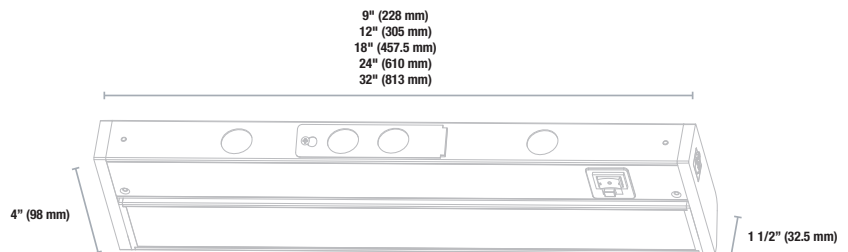

ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	B	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	B	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	B	36 (914)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	C	6.5 (165)	50

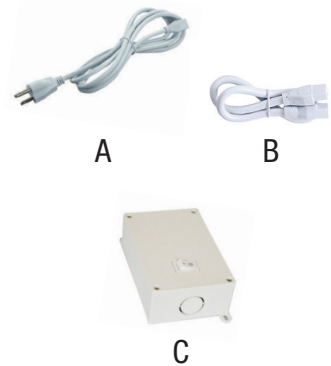

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com





FLUO LED (120 V)


The FLUO LED is designed for 120 V applications and is easy and quick to install as no driver is required. With its seamless look, the FLUO LED is the ideal replacement for traditional fluorescent undercabinet or task lighting for either residential and commercial applications.



- Integrated 5 color temperature selection (2 700/3 000/3 500/4 000/ 5 000 K)
- ON/OFF switch is available on 14", 23", 35", and 47" luminaires
- Each slim bar includes an end-to-end connector to create a seamless run without interruption. Up to 300 W can be daisy chained
- Frosted lens

LED FLUO

Order Code	Model number	Watts (W)	Volts (VAC)	Color Temp. (K)	Lumen Output (lm)	Efficacy (lm/W)	CRI	Life L70 (hrs)	Tested hours LM-80 (hrs)	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Master case qty
5 CCT Selectable																
10"																
69920	UCFL10-3W-A-5CWH	3	120	2 700/3 000/3 500/4 000/5 000	239	80	90+	54 000	9 000	120	White	Frosted	Yes	>0.90	<15	20
14"																
69921	UCFL14-5W-A-5CWH	5	120	2 700/3 000/3 500/4 000/5 000	448	90	90+	54 000	9 000	120	White	Frosted	Yes	>0.90	<15	20
23"																
69922	UCFL23-10W-A-5CWH	10	120	2 700/3 000/3 500/4 000/5 000	855	86	90+	54 000	9 000	120	White	Frosted	Yes	>0.90	<15	20
35"																
69923	UCFL35-15W-A-5CWH	15	120	2 700/3 000/3 500/4 000/5 000	1 136	76	90+	54 000	9 000	120	White	Frosted	Yes	>0.90	<15	20
47"																
69924	UCFL47-20W-A-5CWH	20	120	2 700/3 000/3 500/4 000/5 000	1 787	89	90+	54 000	9 000	120	White	Frosted	Yes	>0.90	<15	20

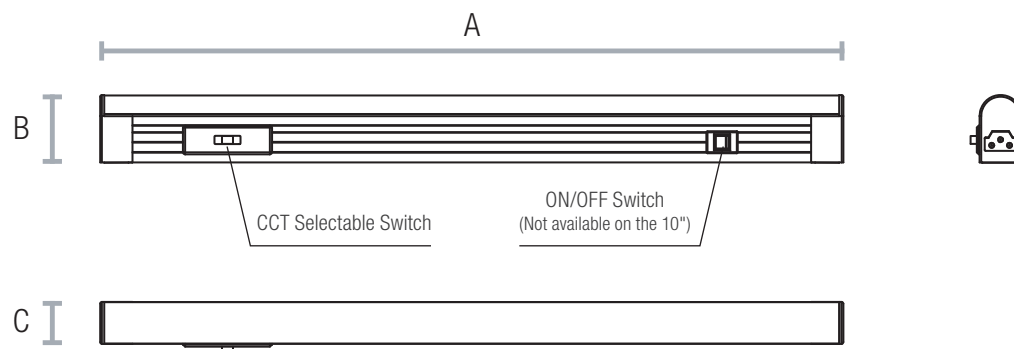

	10"	14"	23"	35"	47"
A in. (cm)	10 1/4" (26)	14" (35.5)	23" (58.4)	35" (88.9)	47" (119.4)
B in. (cm)	1 1/4" (3.22)	1 1/4" (3.22)	1 1/4" (3.22)	1 1/4" (3.22)	1 1/4" (3.22)
C in. (cm)	3/4" (2)	3/4" (2)	3/4" (2)	3/4" (2)	3/4" (2)
Net weight (lbs)	0.29	0.37	0.47	0.72	0.95

INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
2	Fixing clips
1	End to End Connector
2	Mounting screws

ACCESSORIES

Order code	Description	Type
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug
67203	UCS/JUMPER/6IN/STD	6" Jumper
67204	UCS/JUMPER/24IN/STD	24" Jumper
67205	UCS/JUMPER/36IN/STD	36" Jumper






LED Puck Light (120 V)



There is need for an LED driver with the line voltage models, as they can be used directly with the 120 V power cord plug for a quick and simple installation. They can also be installed with the hardwire box for direct connections. The option of surface mounting or recessed installation also adds to the versatility of these LED puck lights.

- Recessed and surface mount installation
- Up to 20 LED puck lights can be installed in a row
- Sturdy aluminum housing to better dissipate the heat
- Gimbal feature to reduce glare and direct the light where needed

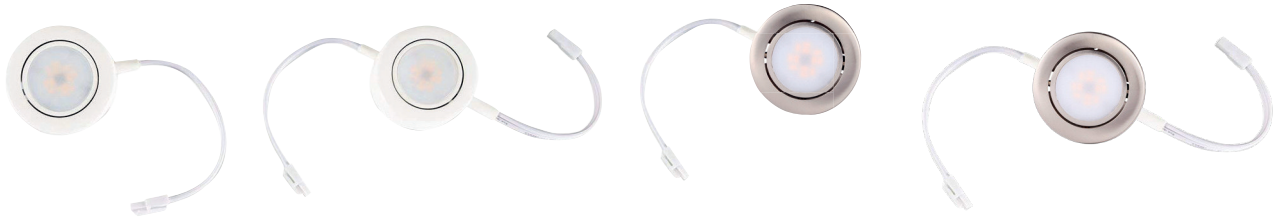


LED PUCK LIGHTS - LINE VOLTAGE (120 V)

Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
LED Puck Light - 1 Wire													
67104	UCP/1WIRE/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
LED Puck Light - 2 Wires													
67100	UCP/2WIRES/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	50
67103	UCP/2WIRES/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
LED Puck Light - Kits of 3 units													
67102	UCP/KIT3/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	20
67105	UCP/KIT3/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	20

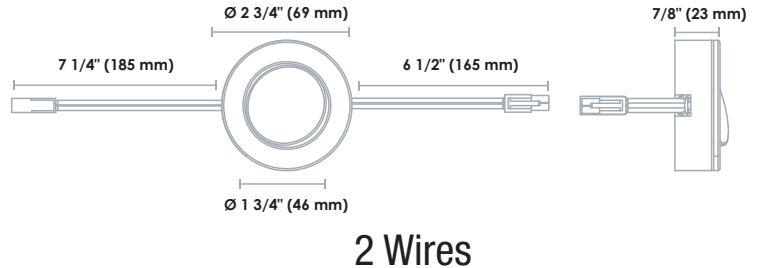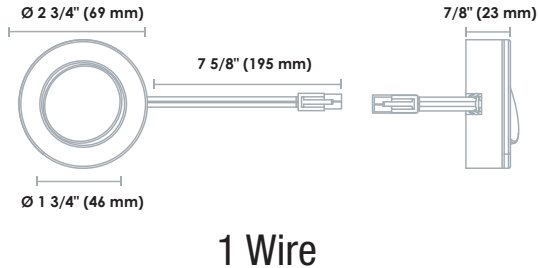

ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67106	UCP/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	B	6 1/2 (165)	50
67108	UCP/JUMPER/12IN/STD	12" Jumper	C	12 (304)	500
67109	UCP/JUMPER/36IN/STD	36" Jumper	C	36 (914)	500
67110	UCP/JUMPER/72IN/STD	72" Jumper	C	72 (1 828)	250



INCLUDED IN THE BOX (KITS OF 3 UNITS)

- 1 Wire LED Puck - 1 unit
- 2 Wires LED Puck - 2 units
- 120 V Power Cord Plug - 1 unit

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com






LED Puck Light - LOW VOLTAGE (12 V)

Stanpro's low voltage LED puck line has a sleek and modern look, with the slimmest profile on the market. Its magnetic design also allows to change the trim finish and the backplate to create a whole new look!

- Up to 10 LED puck lights can be installed in row
- Recessed and surface mount installation
- Sleek 7 mm profile




Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
LED Puck Light													
67168	UCP/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	200
67170	UCP/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	200
67172	UCP/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67174	UCP/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67176	UCP/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	200
LED Puck Light - Kits of 3 units													
67169	UCP/KIT3/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	30
67171	UCP/KIT3/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	30
67173	UCP/KIT3/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67175	UCP/KIT3/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67177	UCP/KIT3/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30
67179	UCP/KIT3/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30

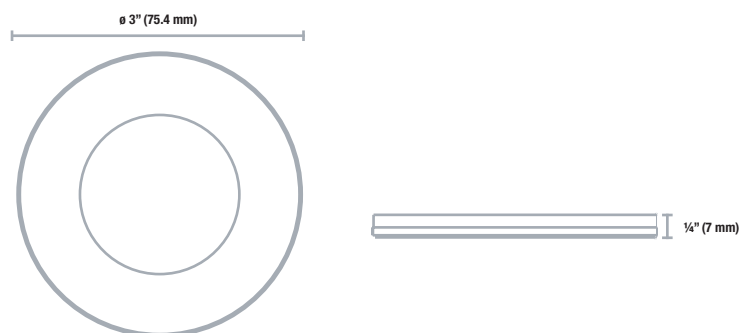

ACCESSORIES (ORDER SEPARATELY)

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183	UCP/ACC/HUB6/STD	Hub for 6 LED Puck Lights	D	30 / 120
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	Plug-in driver	E	- / 80
67185	UCP/ACC/DIMMER/STD	Dimmer Switch	F	30 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion Sensor	G	30 / 120

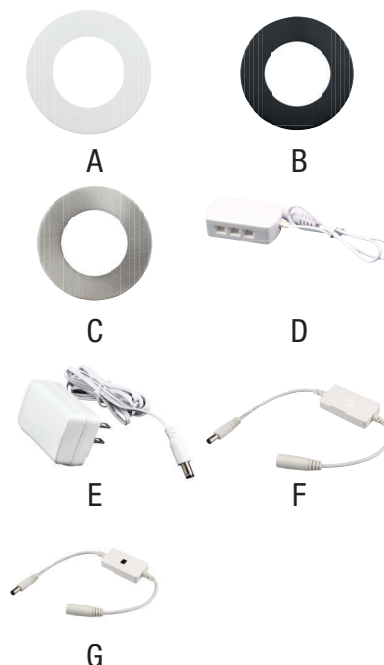

INCLUDED IN THE BOX (KITS OF 3 UNITS)

LED Puck Lights - 3 units

HUB for 6 LED Puck lights - 1 unit

12 V Plug-in LED Driver (12 W) - 1 unit

Lumen values are derived from photometric testing
For a complete list of compatible dimmers, please visit www.standardpro.com





DUOLED Hardwired Driver and Dimmer Switch

Stanpro's DUOLED offers an innovative compact design, combining a dimmer switch and an LED hardwired driver. It converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC), while offering outstanding dimming performances.

Having both products combined into one also eliminates the compatibility issues that are often seen between LED drivers and dimmer switches. DUOLED also offers a timeless and sleek look with a glossy white finish to blend seamlessly with your design.

- Converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC)
- Eliminates compatibility issues between the driver and the dimmer
- Excellent dimming performance (1% -100% dimming)




Order code	Description	Watts (W)	Volts (VAC)	Output Voltage (VDC)	Input Current (mA)	Frequency (Hz)	Power Factor	Face plate Finish	Case qty (master)
68299	DRIVER-DIMMER/S2/12V/60W	60	120	12	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25
68829	DRIVER-DIMMER/S2/24V/100W	100	120	24	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25

ACCESSORY (ORDER SEPARATELY)


Part number	Type	Finish / color	Case qty (master)
67073	DRIVER-DIMMER/TRIM/WH/STD	Glossy White	100

INCLUDED IN THE BOX

Quantity	Description
1	DuoLED
1	Barrier
3	Switch Plate
4	Twisted wire connectors
2	Mounting Screws

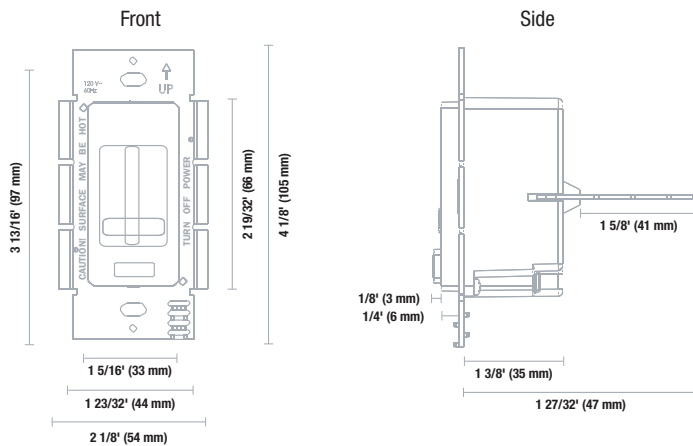


DUOLED

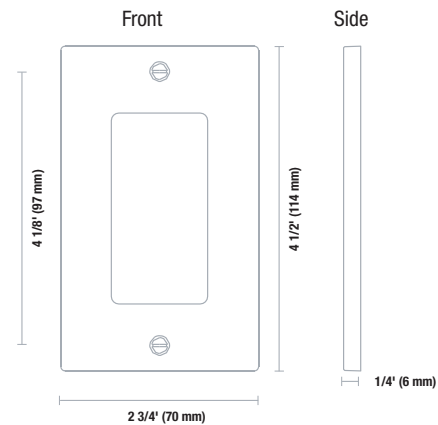

Trim Plate

COMPATIBLE STANPRO PRODUCTS

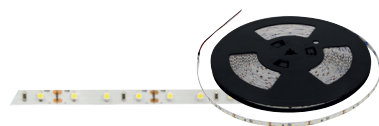

12 V / 24 V LED Tapes







LED Step Light


WAY

The WAY step lights combine durability with a sleek and modern appearance. They are designed to create an inviting atmosphere by enhancing the aesthetics of a space and accentuating architectural features as well as key focal points. Suitable for both indoor and outdoor applications, these luminaires can be integrated into a variety of residential and commercial applications.




Order code	Model number	Watts (W)	Volts (V AC)	Color temp. (K)	Initial lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Orientation	Dimming (Yes/No)	Power factor ≥0.90	THD (%)	Master case qty
Step light without sensor														
69748	ASWA-H-5W-A-30BK	5	120	3 000	150	30	90+	50 000	Black	Horizontal	Yes	≥0.90	<30%	18
69749	ASWA-H-5W-A-30WH	5	120	3 000	150	30	90+	50 000	White	Horizontal	Yes	≥0.90	<30%	18
69750	ASWA-V-3W-A-30BK	3	120	3 000	85	28	90+	50 000	Black	Vertical	Yes	≥0.90	<30%	18
69751	ASWA-V-3W-A-30WH	3	120	3 000	85	28	90+	50 000	White	Vertical	Yes	≥0.90	<30%	18
Step light with PIR motion sensor & photocell														
69752	ASWA-H-3W-A-30BK-MS-P	3	120	3 000	100	33	90+	50 000	Black	Horizontal	No	≥0.50	<30%	18
69753	ASWA-H-3W-A-30WH-MS-P	3	120	3 000	100	33	90+	50 000	White	Horizontal	No	≥0.50	<30%	18
69754	ASWA-V-3W-A-30BK-MS-P	3	120	3 000	90	30	90+	50 000	Black	Vertical	No	≥0.50	<30%	18
69755	ASWA-V-3W-A-30WH-MS-P	3	120	3 000	90	30	90+	50 000	White	Vertical	No	≥0.50	<30%	18


STEP LIGHT WITHOUT SENSOR Horizontal

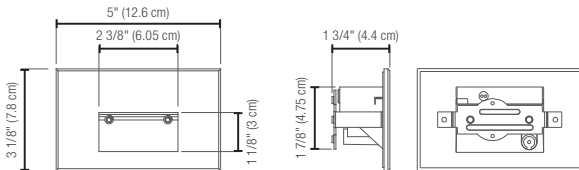


Vertical

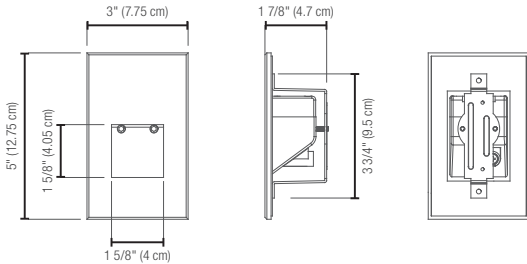

STEP LIGHT WITH PIR MOTION SENSOR & PHOTOCELL Horizontal

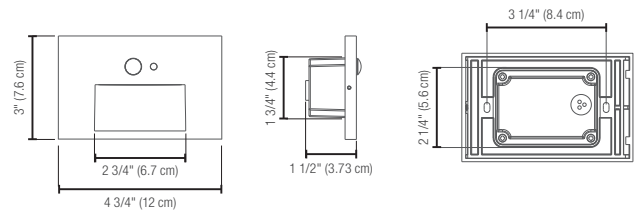

Vertical

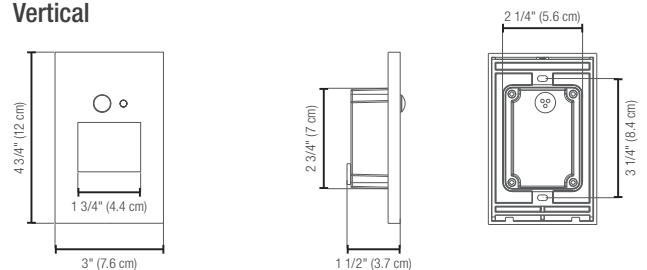



Printed in Canada.

© 2021 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions.

All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

www.standardpro.com



STANPRO

