

# CDRP DIE CAST ALUMINUM LED COMBO

The CDRP series of commercial decorative die cast aluminum combination running man signs are the perfect match of aesthetics and durability. Its unique new design provides spec-grade die cast running man signs with LED emergency lights in a low-profile frame and a spec-grade curved faceplate. The series has been designed with ultra bright, energy efficient, long-lasting white LED lamps for the exit sign and ultra bright white LED lamps in the emergency lighting heads. Faceplates have a quick-snap closure for ease of installation. Suitable for damp locations.



## FEATURES & SPECIFICATIONS

### CONSTRUCTION

#### Circuitry

- LED ultra bright light source
- 120/347 V AC field selectable, or 277 V AC
- High-performance 8.4V, 1.6 AH Ni-Cad batteries
- 120 minutes emergency power duration
- Momentary push button test switch
- Pilot LEDs for AC ON and CHARGE
- High performing 3 W LEDs
- Recharge time is 24 hours

### MECHANICAL




- Die cast aluminum frame and faceplate
- Die cast canopy include ceiling or end mount
- Spider knockout pattern stamped into the inside of the back plate
- Polycarbonate lens easily removed for ease of aiming
- Brushed aluminum frame and faceplate finish standard, black or white powered coat optional

### APPROVALS

- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

### COMPLIANCE

- Meets requirements of ICES-005

OVERVIEW			
LIGHT SOURCE	LED	SIGN EMERGENCY POWER CONSUMPTION (W)	0.90
INPUT VOLTAGE (V AC)	120/347 OR 277	OUTPUT VOLTAGE (V DC)	8.4
SIGN POWER CONSUMPTION	120 V AC = 1.80 W 277 V AC = 1.40 W 347 V AC = 1.70 W		
<div>  LED            ICES 005            SP<sup>®</sup> Energy Verified Energie Verifiee         </div>			

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

## ORDERING GUIDE

SERIES	NBR OF FACES	FRAME / BACK COLOR	FACE COLOR	NBR OF HEADS	HEAD / LAMP	LAMP	INPUT VOLTS (V)	OPTIONS <sup>1</sup>
CDRP	1- SINGLE FACE 2- DOUBLE FACE	BSH- BRUSHED ALUMINUM BLK - BLACK WHT- WHITE	BSH- BRUSHED ALUMINUM BLK - BLACK WHT- WHITE	2 - 2 HEADS	DL - INTEGRATED	O3L - 3W LED	BLANK - 120/347 277 - 277	RDS 0 - NO INDICATORS (DOUBLE FACE ONLY) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL

## OPTIONS

DESCRIPTION	
RDS	RADIO FREQUENCY SUPPRESSION

## WIREGUARD<sup>1</sup>



	PART NUMBER	DIMENSION (IN)
WALL MOUNT	WGD590-V2	16.75 X 17.75 X 6.5
CEILING MOUNT	WGD650-V2	17.75 X 17.75 X 16.50
END MOUNT	WGD650-V2	17.75 X 17.75 X 16.50

<sup>1</sup>Please contact your customer service representative for more information.

## LEXAN GUARD

	PART NUMBER	DIMENSION (IN)
WALL MOUNT	PGD111	19.75 X 14 X 8
CEILING MOUNT	PGD100	16 X 10 X 13.5
END MOUNT	PGD100	16 X 10 X 13.5

## DIMENSIONS

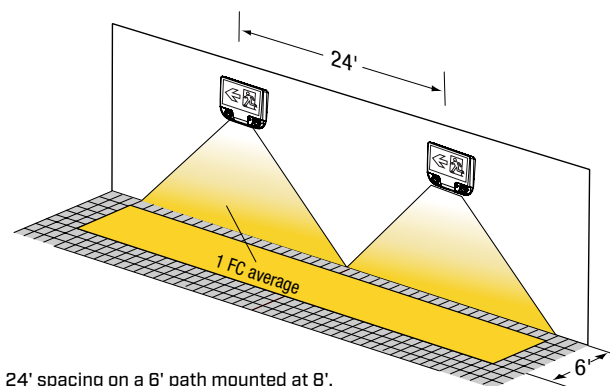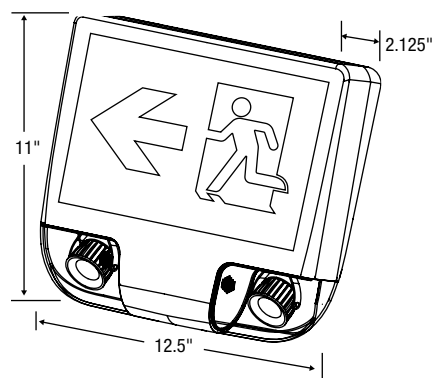

24' spacing on a 6' path mounted at 8'.



Comes standard [single face] with three pictogram legends for direction selection.



Comes standard [double face] with two pictogram legends.



For double face no arrow options, select "0" on the options column.