Project \_\_\_\_\_ Catalogue n° Type \_\_\_\_\_

# **Aim**Lite

### **CRPER** RECESSED EDGELIT

Transform your interior space with the sleek and distinguished CRPER series of commercial edglit combo. Enjoy a refined aesthetic with the standard recessed mount, elevating the overall appearance.



### **FEATURES & SPECIFICATIONS**

#### CIRCUITRY

- LED ultra bright light source
- 120-347 VAC
- 2x 1W high-output LED heads
   producing 260 lumens
- Maintenance free,
   3.6V Ni-Cad battery
- Damp location
- Operating temperature: +10°C to +40°C

### MECHANICAL

- Aluminum housing
- Universal faces
- Recessed mount only
- White colour is standard
  Fully adjustable, LED heads are standard

### SPECIFICATIONS

- Trim and housing made of high grade aluminum
- Backbox made of galvanized steel
- All electronics and faceplate mounted to single chassis for rapid and simple installation
- Hanger bars for drywall ceilings or walls included. Maximum extension of 540 mm
- White powder coat finish standard
- Every unit come standard with multiple running man legends

#### COMPLIANCE

Meets requirements
 of ICES-005

#### APPROVALS

- CSA Certified
- to C22.2 #141-15
- CSA Certified to C860-1


| OVERVIEW                     |             |
|------------------------------|-------------|
| LIGHT SOURCE                 | LED         |
| INPUT VOLTAGE (V AC)         | 120-347     |
| OUTPUT POWER CONSUMPTION (W) | 3           |
| LED OUS                      | <b>€£</b> ® |

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.



## CRPER

### **TYPICAL SPECIFICATION**

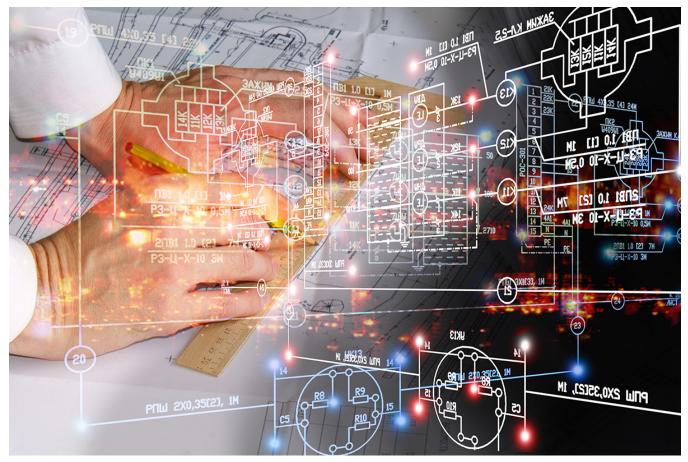


### **TYPICAL SPECIFICATION**

Supply and install Aimlite CRPER Series, The Running Man Edgelit Combination Exit Sign shall operate with AC/DC field selectable 120-347 V AC Input. The Self powered configuration shall be AC field selectable 120-347 V and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using LED ultra-bright light source. The sign shall be suitable for recessed mount and come complete with 3 Running Man fibers for universal direction. The frame shall be extruded aluminum and come complete with an acrylic face plate for maximum uniformity. The Exit Running Man Combination Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Aimlite model number CRPER\_\_\_\_\_\_.

### CRPER

### TECHINCAL SPECIFICATIONS TABLE

| MODEL NUMBER | NBR OF<br>FACE | LIGHT<br>SOURCE | INPUT VOLTS | COLOR |
|--------------|----------------|-----------------|-------------|-------|
| CRPER-1WWHT  | UNIVERSAL      | LED             | 120-347     | WHITE |

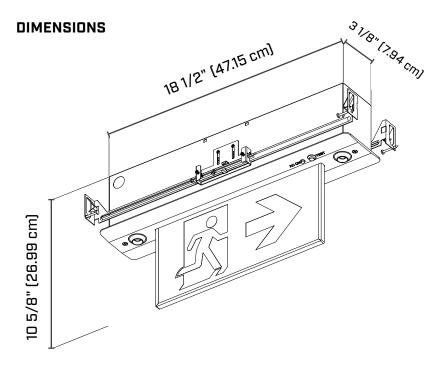

### SPACING GUIDE

| MOUNTING<br>HEIGHT | SPACING CENTER<br>TO CENTER<br>(FT) |
|--------------------|-------------------------------------|
| 8                  | 40                                  |
| 10                 | 39                                  |
| 15                 | 34                                  |
| 20                 | 24                                  |

### CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, please order: FIBER-ES-ER-O