

Project _____
Catalogue n° _____

Type _____
Date _____

 **AimLite**

EBM-2L

MINIATURE LED PLASTIC BATTERY UNIT

120/277 VAC



The EBM-2L series of battery units is designed using a flame retardant plastic enclosure and utilizes a quick connector for easy installation. The EBM-2L provides emergency light thanks to two fully adjustable glare-free shape light head.

FEATURES & SPECIFICATIONS

CIRCUITRY

- LED ultra-bright light source
- Lumens: 150lm
- 120/277 VAC Input, field selectable
- Power consumption: 120V/0.06A/0.4W or 277V/0.07A/0.5W
- 3.6V maintenance free NI-CAD battery
- 90 minutes emergency lighting duration
- 3.6V 1W long life LED light source, 6000K



MECHANICAL

- Injection molded thermoplastic housing
- Suitable for damp location
- Fully adjustable lamp holder location
- White color is standard
- Solid state transfer and battery charger
- Wall and ceiling mount installations
- Temperature +10°C to +40°C

APPROVALS

- Meets or exceeds CSA C22.2 #141-10

OVERVIEW

LIGHT SOURCE	LED	
INPUT VOLTAGE	120/277VAC	
POWER CONSUMPTION	120V/0.06A/0.4W OR 277V/0.07A/0.5W	
<div> LED</div> <div> CERTIFIED</div>		

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

EBM-2L


ORDERING GUIDE

EBM-2L

SERIES

EBM-2L

DIMENSIONS

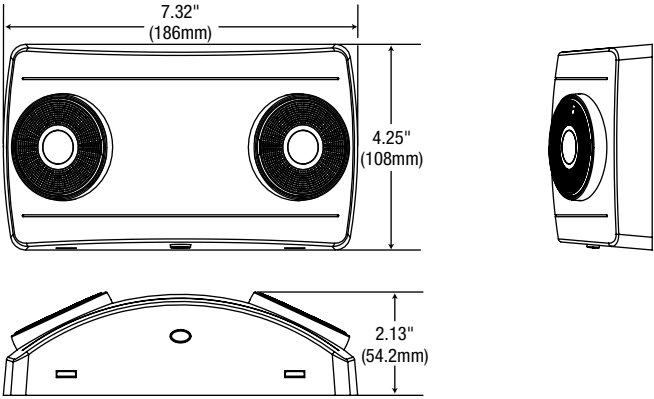

SPACING GUIDE

MOUNTING HEIGHT	PATH WIDTH	SPACING
7.5 FT	3 FT	28 FT
7.5 FT	6 FT	24 FT
10 FT	3 FT	23 FT
10 FT	6 FT	20 FT