

EBPC-5L PLASTIC COMPACT BATTERY UNIT

[OVER 90 MINUTES DURATION STANDALONE UNIT]
 2 X 5W CRISP WHITE LED HEADS



The commercial EBPC-5L features a plastic battery unit designed to provide an economical and versatile solution to emergency lighting needs within a small and compact design. The EBPC-5L series is configured with two 5W LED heads and can run for 90 minutes duration as a standalone unit.

FEATURES & SPECIFICATIONS

CIRCUITRY

- 120/347V AC 60Hz Input, field selectable
- Solid state variable rate charger
- Over 90 minutes Duration Standalone Unit
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limited charger
- Short circuit protection
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- 2 x 5W Crisp White LED Heads
- Low profile, canopy type design with extremely small total footprint
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Unit "quick snaps" onto backplate for simple, speedy installation
- White color is standard
- Note: Not intended for flush ceiling mount.

COMPLIANCES

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005

OVERVIEW

| | |
|-----------------------------|-----------------|
| LIGHT SOURCE | LED |
| INPUT VOLTAGE (V AC) | 120/347 |
| EMERGENCY DURATION | OVER 90 MINUTES |



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

EBPC-5L

ORDERING GUIDE


| PART NO | VOLTS [V DC] | WATTS [W] | NBR OF HEADS | HEAD | LAMP [W] | LIGHT SOURCE | INPUT VOLTS [V AC] | COLOR |
|---------|-----------------|--------------|-----------------|------|-------------|-----------------|-----------------------|-------|
| EBPC-5L | 6 | N/A | 2 | SM | 5 | LED | 120/347 | WHITE |

WIREGUARD¹

| | PART NUMBER | DIMENSIONS (IN) |
|---------|-------------|----------------------|
| EBPC-5L | WGD630-V2 | 15.25 X 12.25 X 9.00 |

¹ Please contact your AimLite customer service representative for more information.

DIMENSIONS

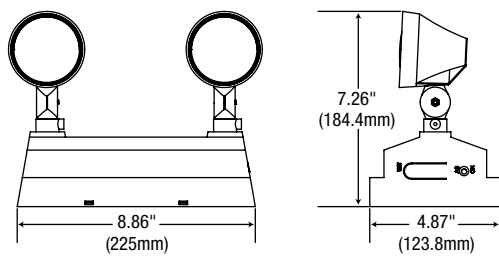

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.