

EXTRUDED ALUMINUM

NRCAN C860 Registered
LED 120/347 V AC Input



Approvals:

CSA Certified to C22.2 #141.15 and C860

DESCRIPTION

The clean lines of the EXAL/SXAL series of commercial extruded aluminum signs present a fully modern appearance. The extruded aluminum provides for a rigid, durable and lightweight sign. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:
EXIT: 6 V DC = 1.0W 12 V DC = 1.4W 24 V DC = 3.5W
SORTIE: 6 V DC = 1.3W 12 V DC = 1.7W 24 V DC = 3.2W

CIRCUITRY - SELF-POWERED


- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger



MECHANICAL

- Extruded aluminum construction
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White powder coat finish standard

DIMENSIONS

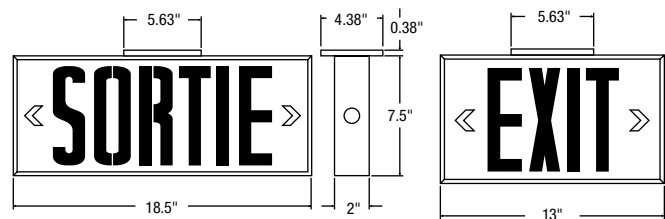

ORDERING GUIDE

Series	Nbr of faces	Mounting	Color	DC Voltage*
EXAL - (Exit) SXAL - (Sortie)	1 - Single face 2 - Double face	C - Ceiling mount W - Wall mount E - End mount M - Universal mount	WHT - White	UNVDC - Universal DC backup voltage 6, 12 or 24 V DC selectable BAT - Self-powered for 90 minutes

* If AC only is required, select the UNVDC option and do not connect the DC wires when installing.