

STEEL

NRCAN C860 Registered
Steel Construction
LED 120/347 V AC Input



Approvals:

CSA Certified to C22.2 #141.15 and C860

DESCRIPTION

The EXST/SXST series of commercial steel signs features a slim profile that eliminates light leaks combined with a simple, easy to install design. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:
6 V DC = 1.3W 12 V DC = 1.7W 24 V DC = 3.5W

CIRCUITRY - SELF-POWERED


- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger



MECHANICAL

- 20 Gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colors optional

DIMENSIONS

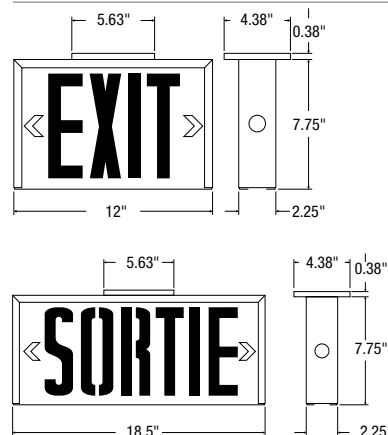

ORDERING GUIDE

Series	Nbr of faces	Mounting	Color	DC Voltage*
EXST - Exit SXST - Sortie	U - Universal faces	M - Universal	WHT - White (standard)	UNVDC - Universal DC backup voltage 6, 12 or 24 V DC selectable BAT - Self-powered for 90 minutes

* If AC only is required, select the UNVDC option and do not connect the DC wires when installing.