

NEPTUNE - RMWL EMERGENCY LED REMOTE



The RMWL is ideal for wet location, indoor/outdoor, commercial and institutional facilities where appearance and the facility of maintenance are desired. The unit makes it suitable for a variety of applications, including schools, arenas and parking garages. Universal spider knock-out pattern stamped into backplate for junction box mounting.

FEATURES & SPECIFICATIONS

CIRCUITRY

- LED ultra bright light source
- 12 - 24 VDC
- 14 W LED consumption
- 1300 delivered lumens
- 2 ultra-bright 5000 K colour led boards
- Adjustable and lockable LED strip

MECHANICAL

- High quality corrosion, flame and vandal resistant polycarbonate
- Low profile
- IP65 rated - Suitable for damp & wet locations
- Fully sealed and gasketed enclosure for damp and wet location applications
- Frosted polycarbonate lens
- Junction box knock-out

embedded on back plate






- Multiple key hole mounting
- Surface/ceiling mount is standard
- Recessed and T-Bar mountings are optional

COMPLIANCE

- Meets requirements of ICES-005

APPROVALS

- CSA Certified to C22.2 #141-15
- Suitable for damp & wet locations


OVERVIEW					
LIGHT SOURCE			DC VOLTAGE [VDC]		
LED			12, 24		
 LED	 WET LOCATION	 65 IP RATING	 ICES 005		

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

ORDERING GUIDE

RMWL	-			-			-			/	
SERIES	VOLTS [VDC]	WATTS [W]	COLOR	MOUNTING				OPTIONS			
RMWL	12V - 12 24V - 24	14W - 14	WHT - WHITE	BLANK - SURFACE/CEILING MOUNT RC - RECESSED MOUNT (BACKBOX MUST BE ORDERED SEPARATELY. SEE BELOW) TB - T-BAR				TP - TAMPER PROOF SCREWS			

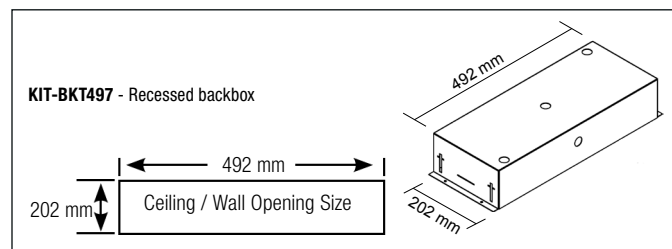


LEXAN GUARD


	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	PGD111	19.75 x 14 x 8
CEILING MOUNT	PGD111	19.75 x 14 x 8

DIMENSIONS


STANDARD Surface wall/ceiling



OPTIONAL Recessed



T-Bar



BACK PLATE

