

RPZN2

HAZARDOUS LOCATION

CLASS I, DIVISION 2, GROUPS C, D
 AC, AC/DC & SELF-POWERED



[self powered version]

The RPZN2 series of Class I, Division 2 rated running man are designed to perform in demanding hazardous applications. The unit maintains its sealed interior with a continuous integral gasket. As well LED pilot light and test switch are sealed type.

FEATURES & SPECIFICATIONS

ELECTRICAL - AC/DC

- LED ultra bright light source
- 120/347V AC Input, field selectable
- 3.6 Watt power consumption
- Emergency DC wattages as follows:
6V DC = 1.8W 12V DC = 1.8W
24V DC = 1.8W

ELECTRICAL - SELF-POWERED

- LED ultra bright light source
- 120/347V AC Input, field selectable
- 4 Watt power consumption
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

MECHANICAL





- Heavy-duty non-metallic, reinforced construction
- One piece, molded and gasketed lens
- Bottom hinged cover secured with two screws
- One-way breather valve for release of gases and/or moisture condensation
- All external metal hardware is stainless steel
- Single face, wall mount only
- Grey finish housing, white faceplate standard

APPROVALS







- CSA Certified to C22.2 #137
- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11
- Class I, Division 2, Groups C, D

COMPLIANCE

- Meets requirements of ICES-005

OVERVIEW			
LIGHT SOURCE	LED	OUTPUT VOLTAGE (V DC)	6, 12, OR 24
INPUT VOLTAGE (V AC)	120/347	DC POWER (W)	1.8
INPUT POWER (W)	3.6 AC/DC 4 SELF-POWERED		
<div>  LED  HAZARDOUS LOCATION  ICES 005  </div>			


ORDERING GUIDE

RPZN2	1	GRY		
SERIES	NBR OF FACES	COLOR	OPERATION	OPTIONS
RPZN2	1 - SINGLE FACE	GRY - GREY	UNVDC - UNIVERSAL DC BACKUP VOLTAGE FROM 6 TO 24V DC BAT - SELF-POWERED FOR 90 MINUTES	      D U URDRDLUL

TEMPERATURE CODES

	[25°C]	[40°C]
UNVDC	T6	T6
BAT	T6	T5

DIMENSIONS

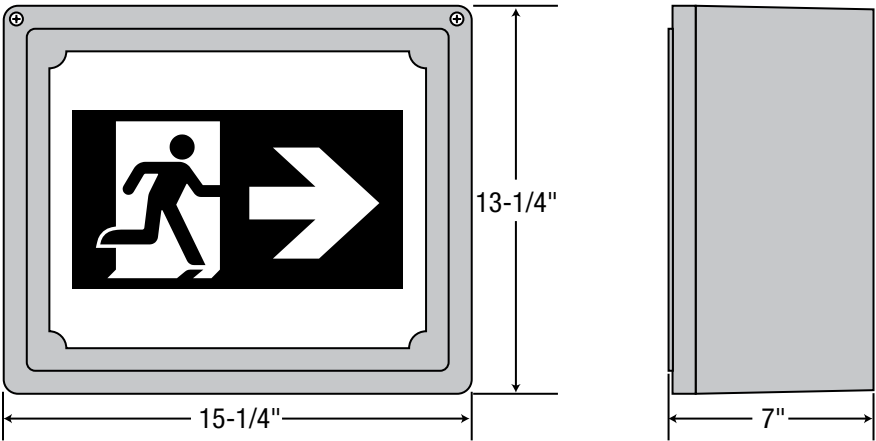

Comes standard (single face) with three pictogram legends for direction selection.

All products are subject to change or may be discontinued any time without notice.
Please consult our chemical resistance guide to ensure selection of the proper product for your application.