









TRACK ACCESSORIES

Our track accessories variety give you the flexibility to built your own design where light is needed.
 Those accessories are compatible with J tracks, adapted for single circuit and available in white or black.


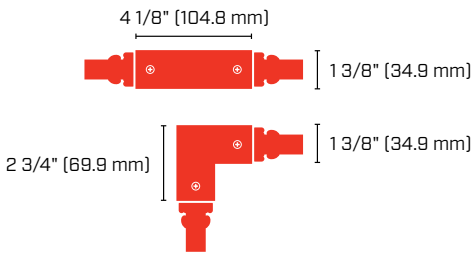

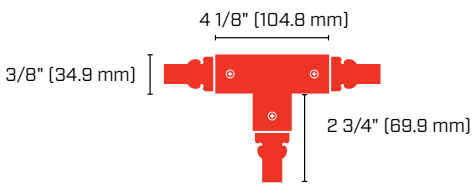

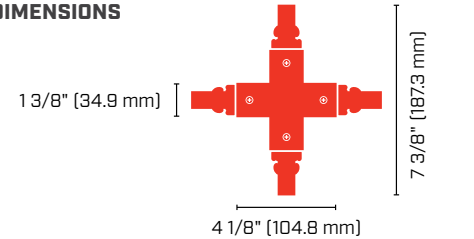


ELECTRICAL FEED





	FLOATING FEED Provides power at any point along the track when installed with a standard junction box.	MODEL NO. AT26	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	SURFACE CONDUIT END FEED For surface conduit wiring, to be installed with standard 1/2" connector. REVERSE POLARITY For use in opposite polarity orientation compared to standard feed connectors.	MODEL NO. AT27 AT27A	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	END FEED (TOP ACCESS) End feed for direct wiring to feed track from above with flexible conduit, BX, etc., or end feed in suspended applications. To be used with 1/2" connector. REVERSE POLARITY For use in opposite polarity orientation compared to standard feed connectors.	MODEL NO. AT38 AT38A	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	MONOPOINT For use in opposite polarity orientation compared to standard feed connectors.	MODEL NO. AT40	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 

¹ For other options and availabilities please contact factory.

TRACK JOINERS AND JOINER FEEDS


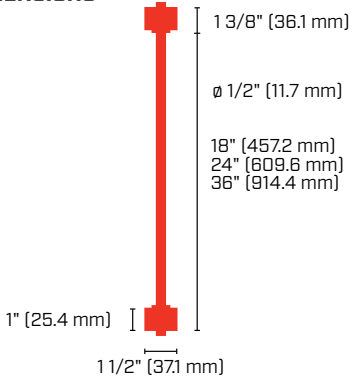




	THREE WAY «L» JOINER Used to join two track sections to make a 90° angle or modify to straight by removing the cover and installing the straight accessory included. Can also be used as an in-line power feed.	MODEL NO. AT23	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	T-CONNECTOR Connects three track sections in a T shape configuration. Can also be used as an in-line power feed. REVERSE POLARITY For use in opposite polarity orientation compared to standard feed connectors.	MODEL NO. AT24 AT24B	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	X-CONNECTOR Connects four track sections in an X configuration, for two separate 90° runs. Can also be used as an in-line power feed.	MODEL NO. AT25	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 

TRACK JOINERS

	MINI-CONNECTOR CONDUCTIVE Connects two track sections end to end for a seamless continuous run.	MODEL NO. AT22	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 
	FLEXIBLE CONNECTOR This flexible connector connects two track sections end to end, with angles from 60° to 180°. Suitable to use to transition from wall-to-wall, wall-to-ceiling, or ceiling to ceiling.	MODEL NO. AT28	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS 

¹ For other options and availabilities please contact factory.

ACCESSORIES

	LINE VOLTAGE EXTENSION This extension wands suspend track head down from track at desired height. Available with the length of 18", 24" and 36".	MODEL NO. ALVE18 ALVE24 ALVE36	FINISH¹ ○ WH-White	DIMENSIONS  <p>1 3/8" (36.1 mm) ø 1/2" (11.7 mm) 18" (457.2 mm) 24" (609.6 mm) 36" (914.4 mm) 1" (25.4 mm) 1 1/2" (37.1 mm)</p>
	GROUNDING OUTLET Provides electrical receptacle on to a track.	MODEL NO. AT33	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS  <p>2 31/64" (63.1 mm) 1 1/2" (38.1 mm)</p>
	UTILITY HOOK Non-electrical hook can support up to 10 lbs.	MODEL NO. AT34	FINISH¹ ● BK-Black ○ WH-White	DIMENSIONS  <p>1 33/64" (38.5 mm) 2 9/16" (65.1 mm)</p>

¹ For other options and availabilities please contact factory.

EXAMPLE OF TRACK SYSTEM INSTALLATION

