

■ Color Selectable

Versatile solution with an integrated 5 colortemperature selection (2 700/3 000/3 500/4 000/5 000 K). Easily

(2 700/3 000/3 500/4 000/5 000 K). Easily select the desired color temperature using the switch located inside the housing. An ideal solution for reducing stocking inventory.


■ Classical but timeless

With a classical design that never goes out of style, our luminaires are ideal for a variety of applications such as hallways, corridors, bedrooms and much more!

Easily Installed

Appreciate an easy installation and maintenance, with a lens that is easily removable.

Adapt the color temperature to your needs

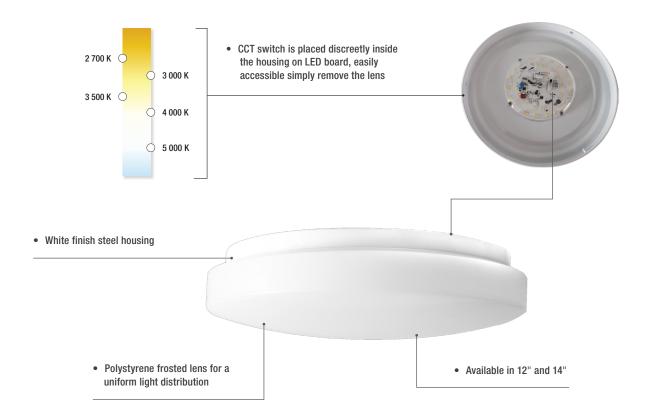



Summary Specification Table

Order code	Model number	Watts	Volts	Color temp.	Lumen output	Efficacy	CRI	Life L70	Beam angle	Shape	Finish	Dimming	Power factor	Master case
		(W)	(VAC)	(K) ¹	(lm) ²	(lm/W)		(hrs) ³	(°)			(Yes/No)		qty
5 CCT SELECTABLE														
12"														
69099	CLDM12-R15W-A-5CWH	15	120	2 700/3 000/3 500/ 4 000/5 000	1 350	90	+08	50 000	120	Round	White	Yes	≥0.90	4
14"														
69100	CLDM14-R25W-A-5CWH	25	120	2 700/3 000/3 500/4 000/5 000	2 320	93	+08	50 000	120	Round	White	Yes	≥0.90	4

 $^{^{\}rm 1}$ Typical color temperature range: +/- 5 %.

Accessories

Order code	Model number	Туре	Finish	Diameter (in)	Compatible with	Master case qty
69101	LEN-CLDM12	Lens	Frosted	11 1/2	69099	10
69102	LEN-CLDM14	Lens	Frosted	13 5/8	69100	10



² Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.