

LPDL™ CCT Selectable LED low profile downlight

The LPDL CCT Selectable series is perfect for any type of residential application where an even light output is desired. It is easy to select the right color temperature to fit the ambiance of a space with the switch conveniently located on the back of the LED module or the LED driver. Featuring an airtight construction and IC rating, this downlight series is suitable for installation in all types of ceilings.



■ Color Selectable

An all-in-one LED downlight solution offering ultimate versatility, with the ability to change the color temperature (2 700/3 000/3 500/ 4 000/5 000 K). An ideal solution for reducing stocking inventory.

■ FT4 Cable Rating


This LED downlight features FT4 rated cable for applications in most buildings including non-combustible constructions which require specific materials such as FT4 cable rating loosely running in the ceiling.

■ Less Than 1" Thick

This ultra slim recessed downlight is designed to be easily installed in shallow or constraint areas such as wood beams, ceiling joist or air ducts.

The ideal solution to reduce inventory

- Aluminum trim

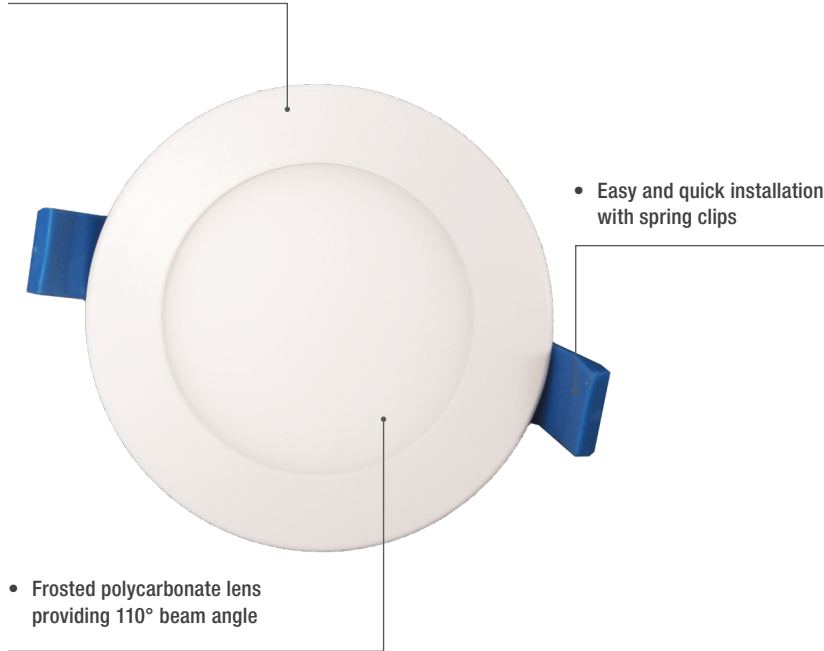

- Switch on the LED module for the 4" and 6"




- Switch on the LED driver for the 3" LPDL




Trim Variety

Available in white, black or brushed nickel

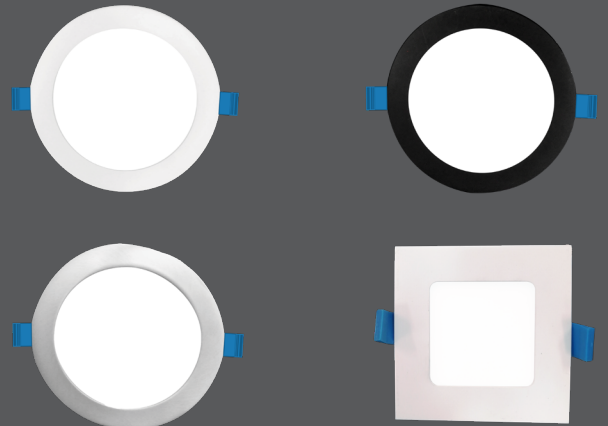

Compatible Accessories

Mounting plate with hanger bars



Adjustable mounting plate



Square mounting plate



Vapor barrier extender



6' Extension cord ¹



4" and 6" Goof ring ²



¹ Up to 6 FT4 extension cords can be connected together. Only compatible with the 4" and 6" LPDL.

² Please note that the white finish of the goof rings differs from the white finish of the LPDL Stanpro Series.