

LPDL CHOICE LED Low Profile Downlight

The CHOICE LPDL is a simple and economical solution. Airtight and IC rated, this luminaire is an excellent choice for any type of residential application where an even light is needed.



dimmable



airtight



IC
rated



■ Less Than 1" Thick

The LPDL downlight is specially designed for installation in shallow or constrained ceiling spaces. In applications where joists or ductwork is present, the LPDL is the right CHOICE!

■ Adapted color temperature

Versatile solution available in a single color temperature of 3 000 K, or with integrated 3 color temperature 2 700/3 000/4 000 K. Easily select the desired color temperature using the switch located on the back of the LED module.

■ FT4 Cable Rating

The LPDL CHOICE downlight features FT4 rated cable for applications in most buildings including non-combustible constructions which require specific materials such as FT4 cable rating loosely running in the ceiling.

LPDL - The Downlight of CHOICE!


- White, black or brushed nickel aluminum trim



- Available in 4" and 6"

- Polystyrene frosted lens with 100° beam angle

- For LPDL CCT selectable, the switch is located on the back of the LED module

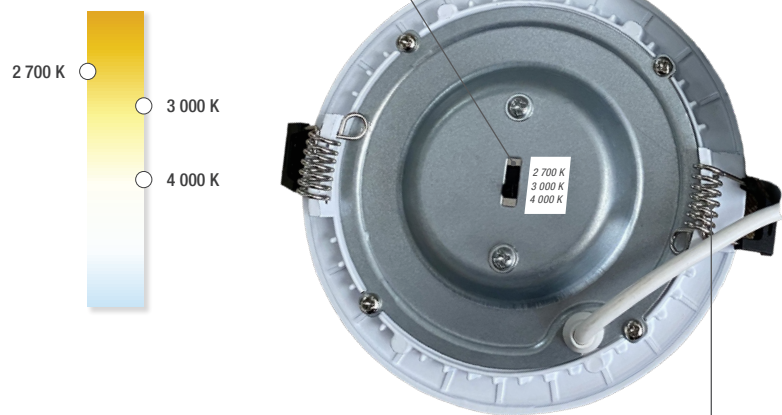

- Strong and robust torsion spring mounting clips

10 LPDL's Pack



Available in economical pack of 10 white 4" LPDL's Choice 3 000 K.

Compatible Accessories


Select from a variety of accessories for different installation options!



Vapor Barrier Extender



Adjustable Mounting Plate



Mounting Plate With Hanger Bars



Square Mounting Plate



4" and 6" Goof Ring



6' Extension Cord