

■ Complete range

Available in all 3 sizes (2', 3' & 4'), Stanpro offers the most complete line of color selectable LED T8 ballast compatible lamps making it the obvious choice for the next project or stocking order.


■ Safety Max[™] and NSF

It is also offered with an optional PTFE coating to contain broken glass, making it shatter resistant and NSF. Standard's Safety Max[™] coating is the perfect solution for commercial kitchens, art galleries, museums, and schools.

■ Easy Installation

Ballast compatible is the easiest solution to retrofit fluorescent luminaires to LED. No rewiring is needed: simply remove the fluorescent lamp and insert the LED tube.

Features

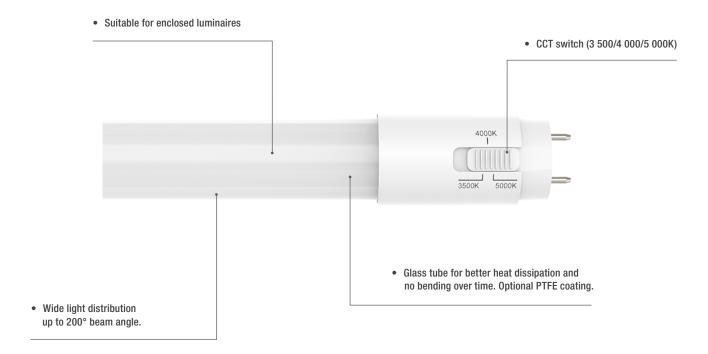


Compatible with a wide range of ballasts!

Standard's LED T8 lamps are compatible with a variety of 120-277V and 347V instant start, rapid start and program start ballast. They can also be dimmable depending on the ballast inside the existing fluorescent luminaire.

Consult our ballast compabitility list for more details and a list of ballasts.





Summary Specification Table

Order code	Description	Watts	Volts	Color temp.	Lumen output	CRI	Life	Case QTY
		(W)	(V)	(K)	(lm)		(hours)	(Master)
69891	T8/8W/80/3CCT/24/STD/SMX	8	120-277/347	3 500/4 000/5 000	1 350	>80	50 000	25
69892	T8/11W/80/3CCT/36/STD/SMX	11	120-277/347	3 500/4 000/5 000	1 700	>80	50 000	25
69893	T8/13W/80/3CCT/48/STD/SMX	13	120-277/347	3 500/4 000/5 000	2 200	>80	50 000	25
69894	T8/10W/80/3CCT/48/STD	10	120-277/347	3 500/4 000/5 000	1 800	>80	50 000	25
69895	T8/13W/80/3CCT/48/STD	13	120-277/347	3 500/4 000/5 000	2 200	>80	50 000	25