

WJM GEN2 LED Jam Jar

The WJM GEN2 LED Industrial luminaire provides an indoor / outdoor solution allowing the user to control the color temperature and power by using the field adjustable integrated switch. This LED jam jar offers 3-in-1 versatile mounting options making it the ideal solution for garages, storage, elevator shafts and industrial areas as well as residential applications.



■ CCT and Power Selectable


An all-in-one LED jam jar solution offering ultimate versatility, with the ability to change the color temperature (3 000/4 000/5 000 K) and lumen output to meet the needs of a variety of projects and applications. An ideal solution for reducing stocking inventory.

■ Easy Maintenance

They offer safe and simple installation which also allows for years of little to no maintenance with an extremely cost efficient operation.


■ Mounting Options

With a variety of mounting options to choose from, ceiling, wall and threaded conduit, mounting has never been made so easy!

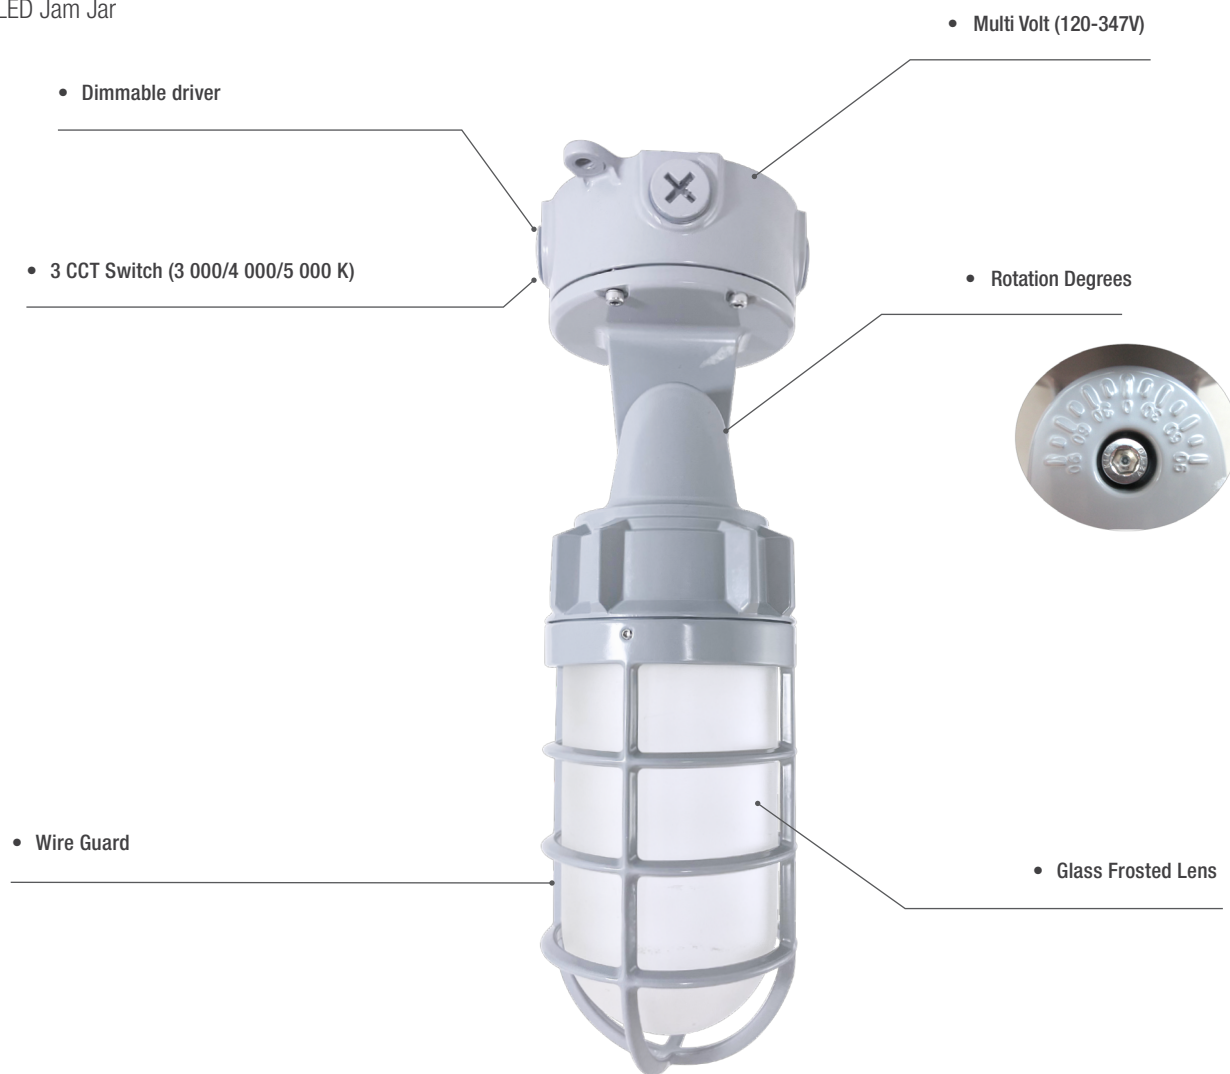

VERSATILE!

The luminaire can be rotated between 0 and 90 degrees, making it suitable for a wide range of applications.

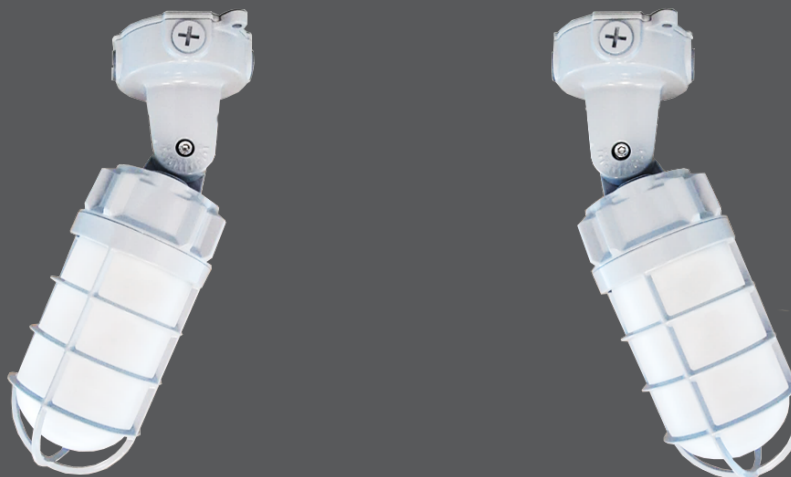

Summary Specification Table

Order code	Model number	Watts	Volts	Color temp.	Lumen output	Efficacy	CRI	Life L70	Tested hours LM-80 (hrs) ⁴	Calc. TM21 (hrs) ⁴	LED current (mA)	Finish	Photocell	Dimming	Power factor	THD (%)	Traditional equivalent (W)	Master case qty
		(W)	(VAC)	(K) ²	(lm) ³	(lm/W)		(hrs) ⁴					(Yes/No)	(Yes/No)			INCAN CFL	
CCT and Power Selectable																		
69561	WJM-PS20A-Q-3C-GY	10/21	120-347	3 000/4 000/5 000	2 562	128	80+	50 000	9 000	160 000	0.18	Grey	No	Yes	>0.90	≤20	150 40	6

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.