

Series Spec Sheet

SLPH-5L

PLASTIC BATTERY UNIT

The commercial SLPH-5L features a plastic battery unit designed to provide an economical and versatile solution to emergency lighting needs within a small and compact design. The SLPH-5L series is configured with two 5W LED heads and can run for 120 minutes duration as a standalone unit.

FEATURES AND SPECIFICATIONS

• Circuitry

- 120/277/347 VAC Input
- Solid state variable rate charger
- 120 minutes emergency power duration
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limiter charger
- Short circuit protection
- 9.6V maintenance free, lithium iron phosphate battery

• Mechanical

- Thermoplastic construction
- 2x 5W LED
- Lamp heads provide up to 100ft
- Wall and ceiling mount
- White colour standard

• Approvals

- CSA C22.2 #141-15

OVERVIEW

Light source	LED
AC voltage (V AC)	120/277/347
Emergency duration	120 minutes

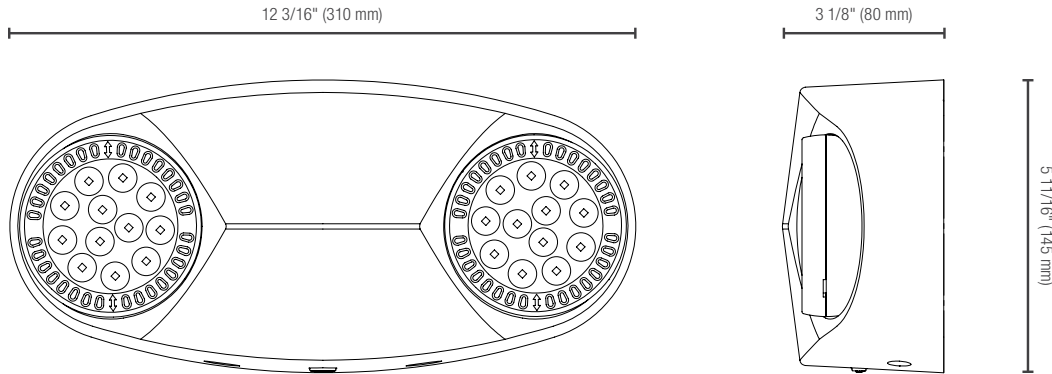


LED
fixture



TECHNICAL SPECIFICATION TABLE

Model number	No. of heads	DC volts (V DC)	Watts	Lamp (W)	Light source	Input Volts (V AC)	Colour
SLPH-5L	2	10	27	5	LED	120/277/347	White

DIMENSIONS**SPACING GUIDE**

Mounting height	Spacing center to center (ft)
9 ft	115
10 ft	112
12 ft	108

LUMEN TABLE

Description	Watt	Lumen	Lumen per watt
SLPH-5L	10	581	58.1

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.