

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

## Series Spec Sheet

# SWIVEL CHOICE GEN. 2

## LED DOWNLIGHT

### 5 CCT Selectable

The LED SWIVEL Choice downlight has been specially designed to highlight specific zones by offering 360° rotation with a 90° tilt. Featuring great performance and quality with a CRI of 90+, this directional downlight is easy to install in any type of ceiling. A cost-effective solution for all residential applications.

## FEATURES AND SPECIFICATIONS

### • Construction

#### Physical Characteristics

- White and black aluminum trim finishes
- Available in 4" and 6" round
- 360° rotation module and 90° tilt
- 45° beam angle
- Frosted lens
- CCT selectable switch is placed on the LED driver
- FT4 cable rating

#### Mounting

- LED module with LED driver easily installs with included quick connect wire
- Torsion spring mounting clips

### • Performance data

- Available in 2 700/3 000/3 500/4 000/5 000 K selectable color temperature
- 90+ CRI
- Estimated life of over 50 000 hours to L70
- Phase cut (ELV / Triac) dimming standard
- Operating temperature:  
-30 °C to 40 °C (-22 °F to 104 °F)

### • Compliances

- cETLus for wet locations
- Energy Star
- Meets requirements of ICES-005 issue 5 class B for use in residential applications
- IC rated for direct contact with insulation
- Airtight as per ASTM E283 standard



## OVERVIEW

|                       |                               |
|-----------------------|-------------------------------|
| Light source          | LED                           |
| Watts (W)             | 9, 13                         |
| Lumen output (lm)     | 764 - 1 298                   |
| Efficacy (lm/W)       | 84 - 99                       |
| Color temperature (K) | 2 700/3 000/3 500/4 000/5 000 |
| CRI                   | 90+                           |



## QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕒

| Order code | Model number              | Watts<br>(W) | Volts<br>(V AC) | Color temp.<br>(K) <sup>1</sup> | Lumen output<br>(lm) <sup>2</sup> | Efficacy<br>(lm/W) | CRI | Life L70<br>(hrs) <sup>3</sup> | Beam angle<br>(°) | Shape | Finish | Cable rating | Power factor | THD (%) | Master case qty |
|------------|---------------------------|--------------|-----------------|---------------------------------|-----------------------------------|--------------------|-----|--------------------------------|-------------------|-------|--------|--------------|--------------|---------|-----------------|
| <b>4"</b>  |                           |              |                 |                                 |                                   |                    |     |                                |                   |       |        |              |              |         |                 |
| 70532      | SWDL4R-G2-9A-5CWH/CHOICE  | 9            | 120             | 2 700/3 000/3 500/4 000/5 000   | 805                               | 89                 | 90+ | 50 000                         | 45                | Round | White  | FT4          | >0.9         | <20     | 32              |
| 70533      | SWDL4R-G2-9A-5CBK/CHOICE  | 9            | 120             | 2 700/3 000/3 500/4 000/5 000   | 805                               | 89                 | 90+ | 50 000                         | 45                | Round | Black  | FT4          | >0.9         | <20     | 32              |
| <b>6"</b>  |                           |              |                 |                                 |                                   |                    |     |                                |                   |       |        |              |              |         |                 |
| 70534      | SWDL6R-G2-13A-5CWH/CHOICE | 13           | 120             | 2 700/3 000/3 500/4 000/5 000   | 1 210                             | 93                 | 90+ | 50 000                         | 45                | Round | White  | FT4          | >0.9         | <20     | 12              |

<sup>1</sup> Typical color temperature range: +/- 5 %.<sup>2</sup> Lumen values are derived from Energy Star reported data. Initial lumens range: +/- 10 %.<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

## LUMEN SPECIFICATION TABLE

| Order code | Model number              | Watts<br>(W) | 2 700 K              |                    | 3 000 K              |                    | 3 500 K              |                    | 4 000 K              |                    | 5 000 K              |                    |
|------------|---------------------------|--------------|----------------------|--------------------|----------------------|--------------------|----------------------|--------------------|----------------------|--------------------|----------------------|--------------------|
|            |                           |              | Lumen output<br>(lm) | Efficacy<br>(lm/W) | Lumen output<br>(lm) | Efficacy<br>(lm/W) | Lumen output<br>(lm) | Efficacy<br>(lm/W) | Lumen output<br>(lm) | Efficacy<br>(lm/W) | Lumen output<br>(lm) | Efficacy<br>(lm/W) |
| 70532      | SWDL4R-G2-9A-5CWH/CHOICE  | 9            | 769                  | 85                 | 816                  | 90                 | 869                  | 96                 | 872                  | 96                 | 813                  | 90                 |
| 70533      | SWDL4R-G2-9A-5CBK/CHOICE  | 9            | 764                  | 84                 | 817                  | 90                 | 866                  | 96                 | 863                  | 95                 | 822                  | 91                 |
| 70534      | SWDL6R-G2-13A-5CWH/CHOICE | 13           | 1 174                | 90                 | 1 172                | 90                 | 1 298                | 99                 | 1 295                | 99                 | 1 226                | 94                 |

## DEFAULT PROGRAMMING


70532: 2 700 K

70533: 2 700 K

70534: 2 700 K

## ACCESSORIES (order separately)


| Order code         | Model number                    | Type                            | Opening diameter<br>(in) | Master case qty |
|--------------------|---------------------------------|---------------------------------|--------------------------|-----------------|
| 62771 <sup>1</sup> | ACC/MPLATE/3.75IN/HANG.BARS/STD | Mounting plate with hanger bars | 3 3/4                    | 20              |
| 66050 <sup>1</sup> | ACC/MPLATE/3.75IN/SQR/STD       | Square mounting plate           | 3 3/4                    | 96              |
| 66057 <sup>1</sup> | ACC/MPLATE/3.75IN/ADJ/STD       | Adjustable mounting plate       | 3 3/4                    | 24              |
| 68986 <sup>2</sup> | GOOF RING-4.25IN                | Goof ring                       | 4 1/4                    | 120             |
| 64264              | LPDL/ACC/6FT/EXTCABLE/STD       | 6' Extension cord               | -                        | 96              |
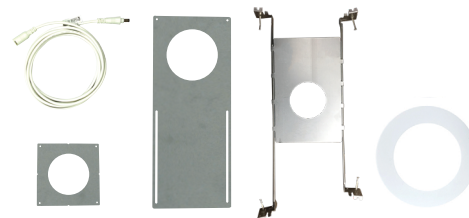
<sup>1</sup> Includes brackets and screws.<sup>2</sup> Please note that the white finish of the goof rings differs from the white finish of the Swivel Choice Series.


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.

## DIMENSIONS AND WEIGHTS

4"

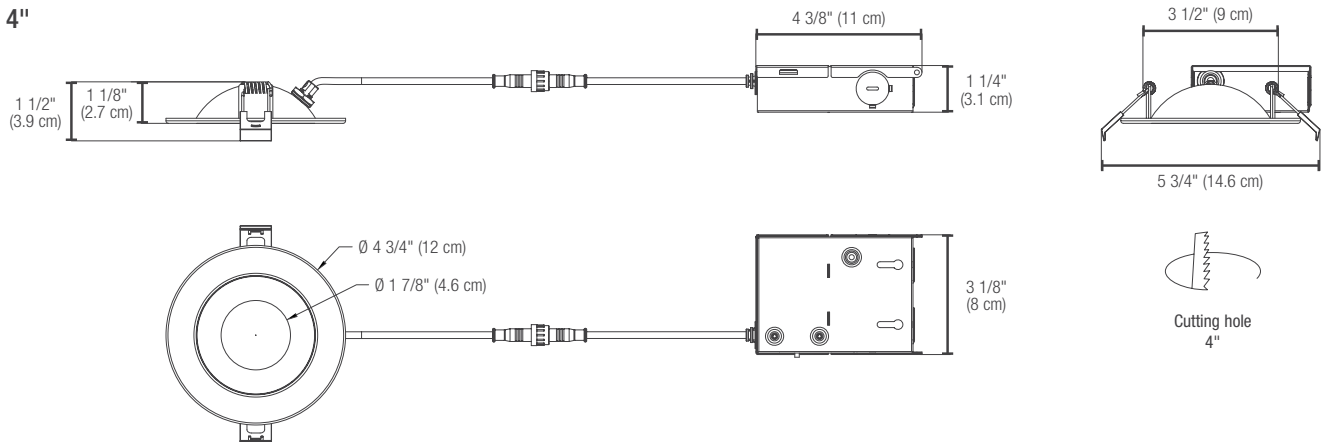

6"

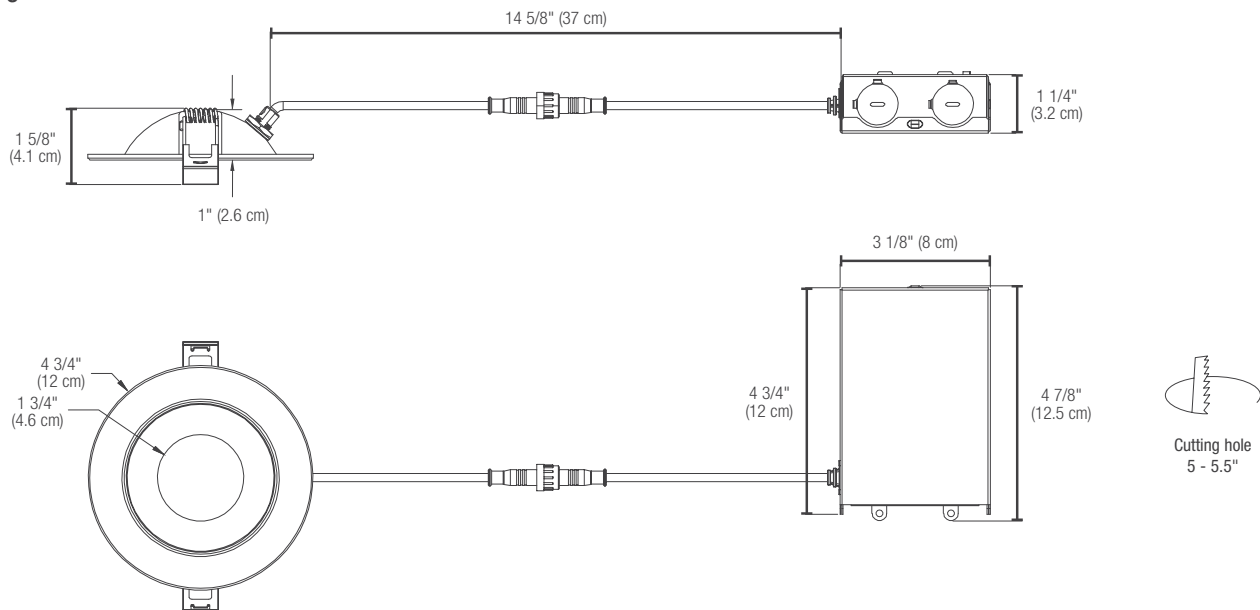

|                  | 4"   | 6"   |
|------------------|------|------|
| Net weight (lbs) | 0.94 | 1.26 |

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.