

Project : \_\_\_\_\_ Type : \_\_\_\_\_  
 Drawn by : \_\_\_\_\_ Catalogue # : \_\_\_\_\_ Date : \_\_\_\_\_

# 3-KEY LINE VOLTAGE WALL SWITCH

## FIELD INSTALLABLE

Integrated Bluetooth® Mesh Technology

### ORDERING INFORMATION

**Order code:** 69737  
**Model number:** CTRL-KBSW-001  
**UPC:** 069549029583  
**DLC ID:** N-HK2HBX

The 3 Key Line Voltage Wall Switch is a versatile Bluetooth® wireless wall switch that offers seamless control. It enables various features, including ON/OFF and dimming control. Set up and re-program or re-group fixtures easily with our Genio app via a smart phone. The switch can be used to retrofit a standard wall switch. Compatible with all standard wall plates.


### Features

- Bluetooth® 5.0 network technology enables the switch to be linked to one or more light groups via the Genio app
- Easily retrofit existing wall switches (neutral is required)


### TECHNICAL SPECS

**Input voltage:** 120-277 V AC  
**Frequency:** 50/60 Hz  
**Input current:** 10 mA Max  
**Color:** Plate/White, Housing/Black  
**Operating temperature:** 0 °C to 40 °C (32 °F to 104 °F)  
**Storage temperature:** -30 °C to 85 °C (-22 °F to 185 °F)  
**Housing material:** UL 94-5 VA  
**Bluetooth® transmit:** 100 ft Max  
**Radio frequency:** 2.4 GHz ± 75 MHz  
**IP rating:** IP20

### DIMENSIONS<sup>1</sup>

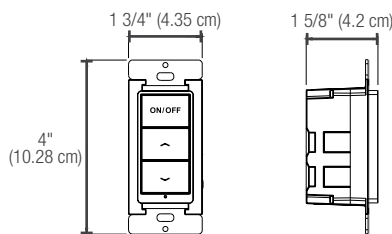

### WIRING



indoor



<sup>1</sup> For pairing instructions, [click here](#).

Qty	Description	Price

I accept the specifications of the accessory configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
 All products are subject to change or may be discontinued any time without notice.

## GENIO CONTROL SYSTEM FEATURES

Genio is Stanpro's smart brand of lighting and emergency lighting. Integrating the latest in Bluetooth® Mesh technology, Genio products allow for customizable features that can be adjusted at your fingertips using a smartphone or other compatible devices. This system is easy to use, versatile and futureproof! Please see below for some of the key features<sup>1</sup> of the Genio control system:



### LIGHTS

Instantly control the color temperature, wattage, lumen output and dimming.



### GROUPS

Easily group luminaires together and control them as a single unit.



### SCENES

Customize your lighting through scenes and create different atmospheres for occasions and activities.




### SCHEDULES

Set schedules to specify dates, times and recurrence patterns for changing the settings of your lighting.



### SENSOR

Adjust the integrated PIR motion sensor and daylight harvesting settings.

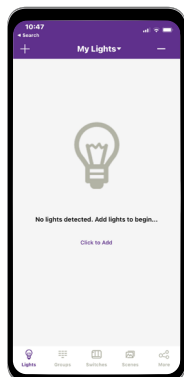

### Lights

- Add
- Name or Rename
- Dimming and Color Tuning
- Delete
- Sensor Settings




### Groups

- Create
- Rename
- Delete
- Add or Remove Lights
- Adjust Group Linkage Level
- Turn On/Off
- Adjust Group Dimming
- Activate Auto Mode



### Scenes

- Create
- Edit
- Delete

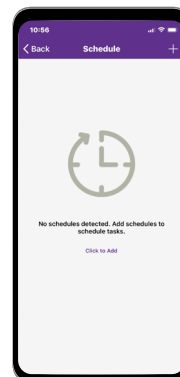

### Schedules

- Creating
- Associate a Schedule To Lights, Groups, or Scenes
- Set a Repeating
- Set Fade Time
- Delete
- Enable Or Disable



Download on the  
App Store



GET IT ON  
Google Play



Download our App  
Instruction Guide

<sup>1</sup> Please note that the features mentioned are part of a broader range of characteristics relating to the Genio Ecosystem and may not be applicable to this specific product. Customers are advised to review the product specifications carefully to understand their capabilities.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Ascot Capital Group is under license. Other trademarks and trade names are those of their respective owners.