

# STANPRO

## SLEXX/SLSRX

EXTRUDED ALUMINUM  
NRCAN C860 Registered  
LED 120/347 V AC Input



**Approvals:**  
CSA Certified to C22.2 #141.15, C860

Energy Verified  
Energie Vérifiée

### DESCRIPTION

The clean lines of the SLEXX/SLSRX series of commercial extruded aluminum signs present a fully modern appearance. The extruded aluminum provides for a rigid, durable and lightweight sign. Available in AC only, AC/DC and internally self-powered versions.

### CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9W power consumption single or double face
- Emergency DC wattages as follows:  
**EXIT: 6 V DC = 1.0W 12 V DC = 1.4W 24 V DC = 3.5W**  
**SORTIE: 6 V DC = 1.3W 12 V DC = 1.7W 24 V DC = 3.2W**

### CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

Project: \_\_\_\_\_

Contractor: \_\_\_\_\_



SLEXX



SLSRX




quick  
ship

### MECHANICAL

- Extruded aluminum construction
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- White powder coat finish standard

### DIMENSIONS

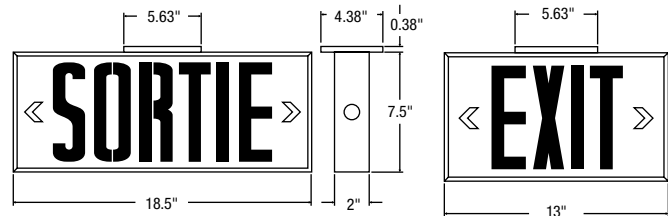

### ORDERING GUIDE

Series	Approval	Nbr of faces	Color	DC Voltage*
SLEXX- (Exit) SLSRX -(Sortie)	C - C860 Certified	0 - Universal face	WH - White	UDC - 6, 12, 24V universal DC IB - Self powered for 90 min.

\* If AC only is required, select the UDC option and do not connect the DC wires when installing.

**QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at [stanpro.com/quick-ship-product-guide](http://stanpro.com/quick-ship-product-guide). Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.