

SLEXY-SLSRY

HAZARDOUS LOCATION

Class I, Division 1 & 2, Groups C, D

AC, AC/DC

120/347 V AC Input

The SLEXY and SLSRY series of hazardous location exit signs is designed to meet and exceed the most stringent code requirements. The housings are made from copper free, heavy-duty die cast aluminum. The frame and faceplate(s) are manufactured in heavy gauge steel with a white, powder coating finish. The signs can be specified to suit a variety of mounting options including ceiling, wall and pendant mount.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- LED ultra bright light source
- Input voltages 120/347 V AC
- Emergency back-up voltage: 6 V, 12 V or 24 V DC


• Mechanical

- Die cast, copper free aluminum, white or raw aluminum finish
- Steel exit sign, white powder coat finish standard
- Snap out directional chevrons/arrows
- Wiring pre-pulled through fixture
- Wall and ceiling models c/w integrated die cast junction box
- Junction box c/w oversized integral mounting holes and tapped and plugged rigid holes
- Comes with a transfer panel for hazardous locations (for AC/DC versions)
- TSFN enclosure must be installed/located outside the classified hazardous location
- Temperature code: T6

• Approvals

- CSA Certified to C22.2 #137
- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11
- Class I, Division 1 & 2, Groups C, D


MOUNTING & DIMENSIONS

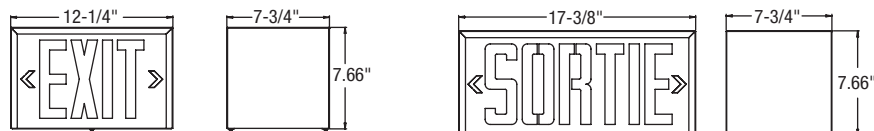


CEILING



PENDANT



WALL



Project: _____
 Type: _____
 Catalogue #: _____
 Drawn by: _____
 Date: _____



hazardous
location



OVERVIEW

Light source	LED
Input voltage	120/347 V AC
DC input voltage	6 V DC, 12 V DC, or 24 V DC

ORDERING GUIDE

/

Series	Nbr of faces	DC Voltage	Mounting	Options†
SLEXY - Exit SLSRY - Sortie	1 - Single face 2 - Double face	Blank - AC only 06 - 6 V 12 - 12 V 24 - 24 V	CM - Ceiling mount PM - Pendant mount WM - Wall mount	OP - Special wording or graphic

† For detailed options descriptions, please consult the options page.

Comments

All products are subject to change or may be discontinued any time without notice.